


4

3


2

1


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/01/31
B	UPDATE	MW	25/9/23

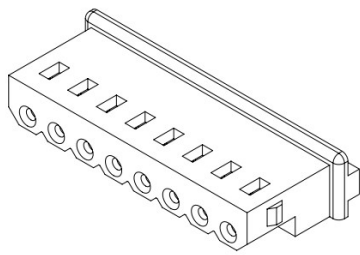

2-8極
2-8 CIRCUIT

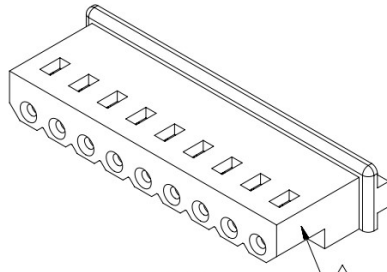

9-15極
9-15 CIRCUIT

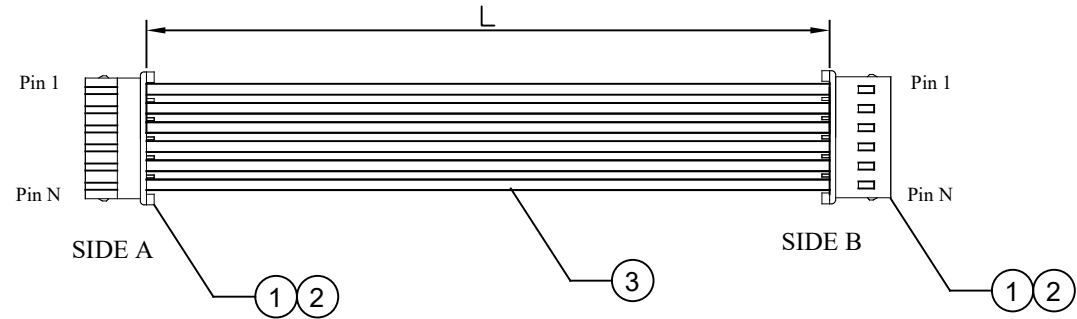

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB020002-021	100	±6	50-37-5023
2	CB020002-022	200	±6	50-37-5023
2	CB020002-023	300	±6	50-37-5023
2	CB020002-024	500	±8	50-37-5023
2	CB020002-025	1000	±10	50-37-5023
3	CB020002-031	100	±6	50-37-5033
3	CB020002-032	200	±6	50-37-5033
3	CB020002-033	300	±6	50-37-5033
3	CB020002-034	500	±8	50-37-5033
3	CB020002-035	1000	±10	50-37-5033
4	CB020002-041	100	±6	50-37-5043
4	CB020002-042	200	±6	50-37-5043
4	CB020002-043	300	±6	50-37-5043
4	CB020002-044	500	±8	50-37-5043
4	CB020002-045	1000	±10	50-37-5043
5	CB020002-051	100	±6	50-37-5053
5	CB020002-052	200	±6	50-37-5053
5	CB020002-053	300	±6	50-37-5053
5	CB020002-054	500	±8	50-37-5053
5	CB020002-055	1000	±10	50-37-5053
6	CB020002-061	100	±6	50-37-5063
6	CB020002-062	200	±6	50-37-5063
6	CB020002-063	300	±6	50-37-5063
6	CB020002-064	500	±8	50-37-5063
6	CB020002-065	1000	±10	50-37-5063
7	CB020002-071	100	±6	50-37-5073
7	CB020002-072	200	±6	50-37-5073
7	CB020002-073	300	±6	50-37-5073
7	CB020002-074	500	±8	50-37-5073
7	CB020002-075	1000	±10	50-37-5073
8	CB020002-081	100	±6	50-37-5083
8	CB020002-082	200	±6	50-37-5083
8	CB020002-083	300	±6	50-37-5083
8	CB020002-084	500	±8	50-37-5083
8	CB020002-085	1000	±10	50-37-5083

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
9	CB020002-091	100	±6	50-37-5093
9	CB020002-092	200	±6	50-37-5093
9	CB020002-093	300	±6	50-37-5093
9	CB020002-094	500	±8	50-37-5093
9	CB020002-095	1000	±10	50-37-5093
10	CB020002-101	100	±6	50-37-5103
10	CB020002-102	200	±6	50-37-5103
10	CB020002-103	300	±6	50-37-5103
10	CB020002-104	500	±8	50-37-5103
10	CB020002-105	1000	±10	50-37-5103
11	CB020002-111	100	±6	50-37-5113
11	CB020002-112	200	±6	50-37-5113
11	CB020002-113	300	±6	50-37-5113
11	CB020002-114	500	±8	50-37-5113
11	CB020002-115	1000	±10	50-37-5113
12	CB020002-121	100	±6	50-37-5123
12	CB020002-122	200	±6	50-37-5123
12	CB020002-123	300	±6	50-37-5123
12	CB020002-124	500	±8	50-37-5123
12	CB020002-125	1000	±10	50-37-5123
13	CB020002-131	100	±6	50-37-5133
13	CB020002-132	200	±6	50-37-5133
13	CB020002-133	300	±6	50-37-5133
13	CB020002-134	500	±8	50-37-5133
13	CB020002-135	1000	±10	50-37-5133
14	CB020002-141	100	±6	50-37-5143
14	CB020002-142	200	±6	50-37-5143
14	CB020002-143	300	±6	50-37-5143
14	CB020002-144	500	±8	50-37-5143
14	CB020002-145	1000	±10	50-37-5143
15	CB020002-151	100	±6	50-37-5153
15	CB020002-152	200	±6	50-37-5153
15	CB020002-153	300	±6	50-37-5153
15	CB020002-154	500	±8	50-37-5153
15	CB020002-155	1000	±10	50-37-5153

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	PIN 1	
PIN 2	Black	PIN 2	50-37-5023
PIN 3	Yellow	PIN 3	50-37-5033
PIN 4	Green	PIN 4	50-37-5043
PIN 5	Blue	PIN 5	50-37-5053
PIN 6	White	PIN 6	50-37-5063
PIN 7	Orange	PIN 7	50-37-5073
PIN 8	Gray	PIN 8	50-37-5083
PIN 9	Purple	PIN 9	50-37-5093
PIN 10	Brown	PIN 10	50-37-5103
PIN 11	Red	PIN 11	50-37-5113
PIN 12	Black	PIN 12	50-37-5123
PIN 13	Yellow	PIN 13	50-37-5133
PIN 14	Green	PIN 14	50-37-5143
PIN 15	Blue	PIN 15	50-37-5153

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, COLOR SEE TABLE, 22AWG							
2	2N	PCS	2.50mm PITCH MINI SPOX FEMALE TERMINAL, MOLEX 8701039							
1	2	PCS	2.50mm PITCH MINI SPOX FEMALE HSG, MOLEX 5037-5XX3							
S/N	QTY	UNIT	DESCRIPTION							
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com					
			RW	SEE TABLE						
			CHECKED	DOC#	TITLE: MOLEX 2.50MM PITCH OTS MINI SPOX 5264, DUAL ENDS TYPE B,TYPE CDB					
			CT	SD-CB020002						
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN	CUSTOMER COPY		SIZE	UNIT	SCALE	PAGE	REV
			MW			A4	MM	N.T.S	1 OF 1	B

4

3

2

1