


4

3


2

1


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/10/29
B	UPDATE	MW	25/9/23

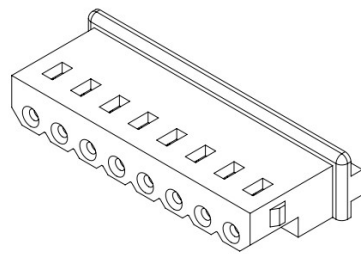

2-8極
2-8 CIRCUIT

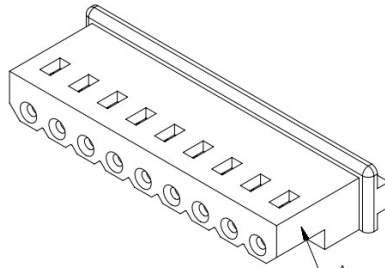

9-15極
9-15 CIRCUIT

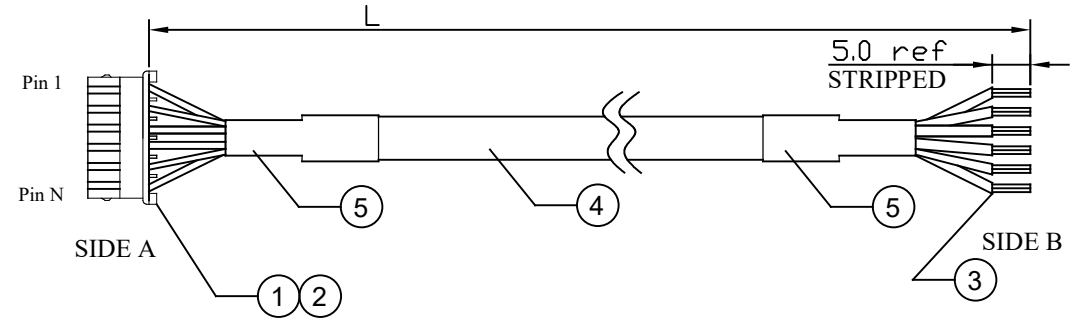

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB020003-021	100	±6	50-37-5023
2	CB020003-022	200	±6	50-37-5023
2	CB020003-023	300	±6	50-37-5023
2	CB020003-024	500	±8	50-37-5023
2	CB020003-025	1000	±10	50-37-5023
3	CB020003-031	100	±6	50-37-5033
3	CB020003-032	200	±6	50-37-5033
3	CB020003-033	300	±6	50-37-5033
3	CB020003-034	500	±8	50-37-5033
3	CB020003-035	1000	±10	50-37-5033
4	CB020003-041	100	±6	50-37-5043
4	CB020003-042	200	±6	50-37-5043
4	CB020003-043	300	±6	50-37-5043
4	CB020003-044	500	±8	50-37-5043
4	CB020003-045	1000	±10	50-37-5043
5	CB020003-051	100	±6	50-37-5053
5	CB020003-052	200	±6	50-37-5053
5	CB020003-053	300	±6	50-37-5053
5	CB020003-054	500	±8	50-37-5053
5	CB020003-055	1000	±10	50-37-5053
6	CB020003-061	100	±6	50-37-5063
6	CB020003-062	200	±6	50-37-5063
6	CB020003-063	300	±6	50-37-5063
6	CB020003-064	500	±8	50-37-5063
6	CB020003-065	1000	±10	50-37-5063
7	CB020003-071	100	±6	50-37-5073
7	CB020003-072	200	±6	50-37-5073
7	CB020003-073	300	±6	50-37-5073
7	CB020003-074	500	±8	50-37-5073
7	CB020003-075	1000	±10	50-37-5073
8	CB020003-081	100	±6	50-37-5083
8	CB020003-082	200	±6	50-37-5083
8	CB020003-083	300	±6	50-37-5083
8	CB020003-084	500	±8	50-37-5083
8	CB020003-085	1000	±10	50-37-5083

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
9	CB020003-091	100	±6	50-37-5093
9	CB020003-092	200	±6	50-37-5093
9	CB020003-093	300	±6	50-37-5093
9	CB020003-094	500	±8	50-37-5093
9	CB020003-095	1000	±10	50-37-5093
10	CB020003-101	100	±6	50-37-5103
10	CB020003-102	200	±6	50-37-5103
10	CB020003-103	300	±6	50-37-5103
10	CB020003-104	500	±8	50-37-5103
10	CB020003-105	1000	±10	50-37-5103

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	stripped	50-37-5023
PIN 2	Black	stripped	
PIN 3	Yellow	stripped	50-37-5033
PIN 4	Green	stripped	50-37-5043
PIN 5	Blue	stripped	50-37-5053
PIN 6	White	stripped	50-37-5063
PIN 7	Orange	stripped	50-37-5073
PIN 8	Gray	stripped	50-37-5083
PIN 9	Purple	stripped	50-37-5093
PIN 10	Brown	stripped	50-37-5103

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

5	AR	M	HEAT SHRINK TUBE, BLACK					
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE					
3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, COLOR SEE TABLE, 22AWG					
2	N	PCS	2.50mm PITCH MINI SPOX FEMALE TERMINAL, MOLEX 8701039					
1	I	PCS	2.50mm PITCH MINI SPOX FEMALE HSG, MOLEX 5037-5XX3					
S/N	Q'TY	UNIT	DESCRIPTION					
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	P/N:	CONBEONE www.conbeone.com			
			RW	SEE TABLE				
			CHECKED	DOC#				
			CT	SD-CB020003				
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN	TITLE: MOLEX 2.50MM PITCH OTS				
			MW	MINI SPOX,5264, SINGLE END, TYPE CSEP				
				SIZE	UNIT	SCALE	PAGE	REV
			A4	MM	N.T.S	1 OF 1	B	

4

3

2

1