


4

3


2

1


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/01/31
B	UPDATE	MW	25/9/23

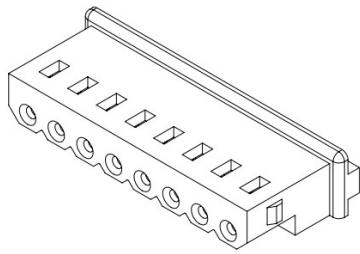

2-8極
2-8 CIRCUIT

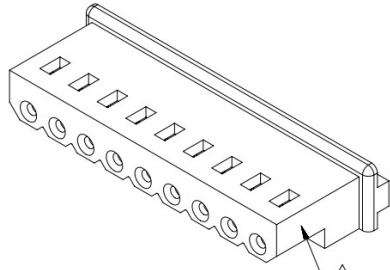

9-15極
9-15 CIRCUIT

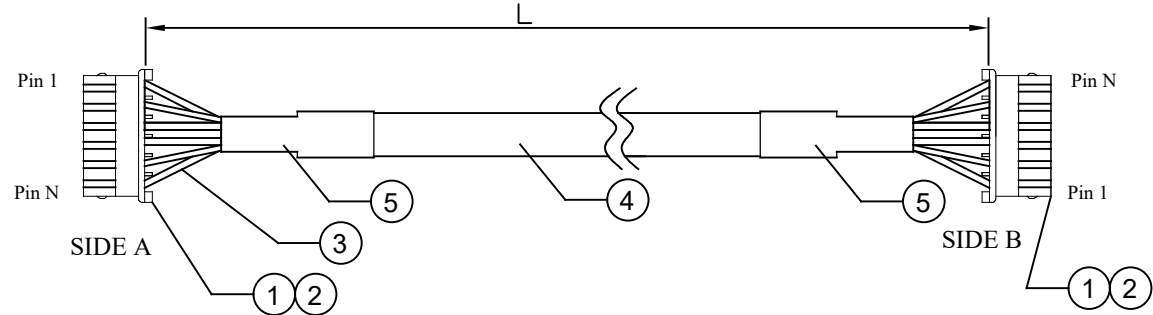

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB020004-021	100	±6	50-37-5023
2	CB020004-022	200	±6	50-37-5023
2	CB020004-023	300	±6	50-37-5023
2	CB020004-024	500	±8	50-37-5023
2	CB020004-025	1000	±10	50-37-5023
3	CB020004-031	100	±6	50-37-5033
3	CB020004-032	200	±6	50-37-5033
3	CB020004-033	300	±6	50-37-5033
3	CB020004-034	500	±8	50-37-5033
3	CB020004-035	1000	±10	50-37-5033
4	CB020004-041	100	±6	50-37-5043
4	CB020004-042	200	±6	50-37-5043
4	CB020004-043	300	±6	50-37-5043
4	CB020004-044	500	±8	50-37-5043
4	CB020004-045	1000	±10	50-37-5043
5	CB020004-051	100	±6	50-37-5053
5	CB020004-052	200	±6	50-37-5053
5	CB020004-053	300	±6	50-37-5053
5	CB020004-054	500	±8	50-37-5053
5	CB020004-055	1000	±10	50-37-5053
6	CB020004-061	100	±6	50-37-5063
6	CB020004-062	200	±6	50-37-5063
6	CB020004-063	300	±6	50-37-5063
6	CB020004-064	500	±8	50-37-5063
6	CB020004-065	1000	±10	50-37-5063
7	CB020004-071	100	±6	50-37-5073
7	CB020004-072	200	±6	50-37-5073
7	CB020004-073	300	±6	50-37-5073
7	CB020004-074	500	±8	50-37-5073
7	CB020004-075	1000	±10	50-37-5073
8	CB020004-081	100	±6	50-37-5083
8	CB020004-082	200	±6	50-37-5083
8	CB020004-083	300	±6	50-37-5083
8	CB020004-084	500	±8	50-37-5083
8	CB020004-085	1000	±10	50-37-5083
9	CB020004-091	100	±6	50-37-5093
9	CB020004-092	200	±6	50-37-5093
9	CB020004-093	300	±6	50-37-5093
9	CB020004-094	500	±8	50-37-5093
9	CB020004-095	1000	±10	50-37-5093
10	CB020004-101	100	±6	50-37-5103
10	CB020004-102	200	±6	50-37-5103
10	CB020004-103	300	±6	50-37-5103
10	CB020004-104	500	±8	50-37-5103
10	CB020004-105	1000	±10	50-37-5103

50-37-5023

SIDE A		SIDE B
PIN 1	Red	PIN 2
PIN 2	Black	PIN 1

50-37-5033

SIDE A		SIDE B
PIN 1	Red	PIN 3
PIN 2	Black	PIN 2
PIN 3	Yellow	PIN 1

50-37-5043

SIDE A		SIDE B
PIN 1	Red	PIN 4
PIN 2	Black	PIN 3
PIN 3	Yellow	PIN 2
PIN 4	Green	PIN 1

50-37-5053

SIDE A		SIDE B
PIN 1	Red	PIN 5
PIN 2	Black	PIN 4
PIN 3	Yellow	PIN 3
PIN 4	Green	PIN 2
PIN 5	Blue	PIN 1

50-37-5063

SIDE A		SIDE B
PIN 1	Red	PIN 6
PIN 2	Black	PIN 5
PIN 3	Yellow	PIN 4
PIN 4	Green	PIN 3
PIN 5	Blue	PIN 2
PIN 6	White	PIN 1

50-37-5073

SIDE A		SIDE B
PIN 1	Red	PIN 7
PIN 2	Black	PIN 6
PIN 3	Yellow	PIN 5
PIN 4	Green	PIN 4
PIN 5	Blue	PIN 3
PIN 6	White	PIN 2
PIN 7	Orange	PIN 1

50-37-5083

SIDE A		SIDE B
PIN 1	Red	PIN 8
PIN 2	Black	PIN 7
PIN 3	Yellow	PIN 6
PIN 4	Green	PIN 5
PIN 5	Blue	PIN 4
PIN 6	White	PIN 3
PIN 7	Orange	PIN 2
PIN 8	Gray	PIN 1

50-37-5093


SIDE A		SIDE B
PIN 1	Red	PIN 9
PIN 2	Black	PIN 8
PIN 3	Yellow	PIN 7
PIN 4	Green	PIN 6
PIN 5	Blue	PIN 5
PIN 6	White	PIN 4
PIN 7	Orange	PIN 3
PIN 8	Gray	PIN 2
PIN 9	Purple	PIN 1

50-37-5103

SIDE A		SIDE B
PIN 1	Red	PIN 10
PIN 2	Black	PIN 9
PIN 3	Yellow	PIN 8
PIN 4	Green	PIN 7
PIN 5	Blue	PIN 6
PIN 6	White	PIN 5
PIN 7	Orange	PIN 4
PIN 8	Gray	PIN 3
PIN 9	Purple	PIN 2
PIN 10	Brown	PIN 1

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

5	AR	M	HEAT SHRINK TUBE, BLACK					
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE					
3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, SEE TABLE, 22AWG					
2	2N	PCS	2.50mm PITCH MINI SPOX FEMALE TERMINAL, MOLEX 8701039					
1	2	PCS	2.50mm PITCH MINI SPOX FEMALE HSG, MOLEX 5037-5XX3					
S/N	Q'TY	UNIT	DESCRIPTION					
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ± 3°		APPROVED	PIN:	 www.conbeone.com			
			RW	SEE TABLE				
			CHECKED	DOC#	TITLE: MOLEX 2.50MM PITCH OTS			
		CT	SD-CB020004	MINI SPOX.5264, DUAL ENDS TYPE A, TYPE CDAP				
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGJIANG CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION			DRAWN	CUSTOMER COPY				
			MW	SIZE	UNIT	SCALE	PAGE	REV
			A4	MM	N.T.S	1 OF 1	B	

4

3

2

1