

4

3


2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/01/31
B	UPDATE	MW	25/9/23


D

D

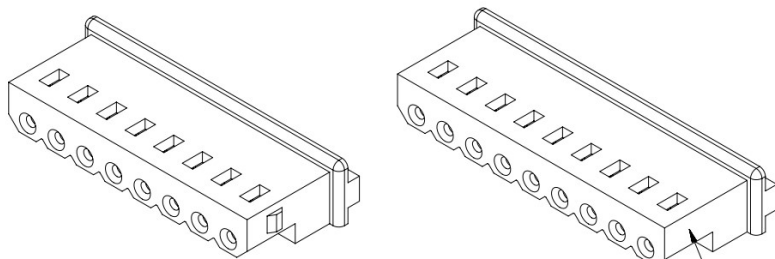

2-8極
2-8 CIRCUIT

9-15極
9-15 CIRCUIT

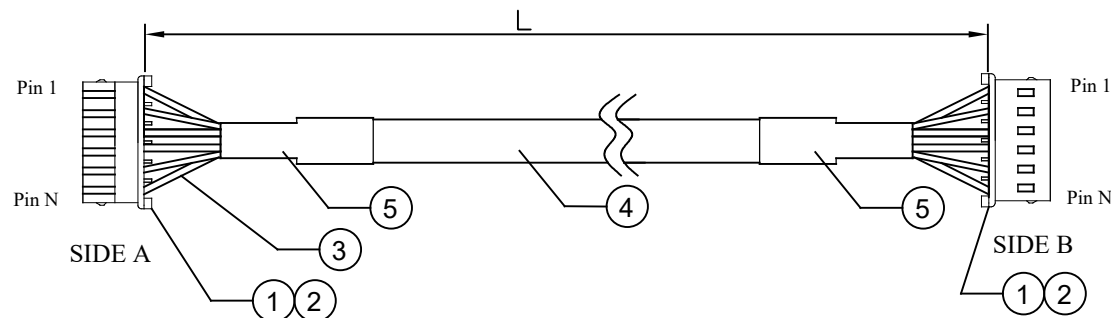

C

C

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB020005-021	100	±6	50-37-5023
2	CB020005-022	200	±6	50-37-5023
2	CB020005-023	300	±6	50-37-5023
2	CB020005-024	500	±8	50-37-5023
2	CB020005-025	1000	±10	50-37-5023
3	CB020005-031	100	±6	50-37-5033
3	CB020005-032	200	±6	50-37-5033
3	CB020005-033	300	±6	50-37-5033
3	CB020005-034	500	±8	50-37-5033
3	CB020005-035	1000	±10	50-37-5033
4	CB020005-041	100	±6	50-37-5043
4	CB020005-042	200	±6	50-37-5043
4	CB020005-043	300	±6	50-37-5043
4	CB020005-044	500	±8	50-37-5043
4	CB020005-045	1000	±10	50-37-5043
5	CB020005-051	100	±6	50-37-5053
5	CB020005-052	200	±6	50-37-5053
5	CB020005-053	300	±6	50-37-5053
5	CB020005-054	500	±8	50-37-5053
5	CB020005-055	1000	±10	50-37-5053
6	CB020005-061	100	±6	50-37-5063
6	CB020005-062	200	±6	50-37-5063
6	CB020005-063	300	±6	50-37-5063
6	CB020005-064	500	±8	50-37-5063
6	CB020005-065	1000	±10	50-37-5063
7	CB020005-071	100	±6	50-37-5073
7	CB020005-072	200	±6	50-37-5073
7	CB020005-073	300	±6	50-37-5073
7	CB020005-074	500	±8	50-37-5073
7	CB020005-075	1000	±10	50-37-5073
8	CB020005-081	100	±6	50-37-5083
8	CB020005-082	200	±6	50-37-5083
8	CB020005-083	300	±6	50-37-5083
8	CB020005-084	500	±8	50-37-5083
8	CB020005-085	1000	±10	50-37-5083

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
9	CB020005-091	100	±6	50-37-5093
9	CB020005-092	200	±6	50-37-5093
9	CB020005-093	300	±6	50-37-5093
9	CB020005-094	500	±8	50-37-5093
9	CB020005-095	1000	±10	50-37-5093
10	CB020005-101	100	±6	50-37-5103
10	CB020005-102	200	±6	50-37-5103
10	CB020005-103	300	±6	50-37-5103
10	CB020005-104	500	±8	50-37-5103
10	CB020005-105	1000	±10	50-37-5103

B

B

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	PIN 1	
PIN 2	Black	PIN 2	50-37-5023
PIN 3	Yellow	PIN 3	50-37-5033
PIN 4	Green	PIN 4	50-37-5043
PIN 5	Blue	PIN 5	50-37-5053
PIN 6	White	PIN 6	50-37-5063
PIN 7	Orange	PIN 7	50-37-5073
PIN 8	Gray	PIN 8	50-37-5083
PIN 9	Purple	PIN 9	50-37-5093
PIN 10	Brown	PIN 10	50-37-5103

A

A

5	AR	M	HEAT SHRINK TUBE, BLACK		
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE		
3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, COLOR SEE TABLE, 22AWG		
2	2N	PCS	2.50mm PITCH MINI SPOX FEMALE TERMINAL, MOLEX 8701039		
1	2	PCS	2.50mm PITCH MINI SPOX FEMALE HSG. MOLEX 5037-5XX3		
S/N	Q'TY	UNIT	DESCRIPTION		
		GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED RW CHECKED CT	PIN: SEE TABLE DOC# SD-CB020005
				TITLE: MOLEX 2.50MM PITCH OTS MINI SPOX.5264, DUAL ENDS TYPE B,TYPE CDB	
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGHUANG CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION					
DRAWN MW		CUSTOMER COPY		SIZE A4	UNIT MM
				SCALE N.T.S	PAGE 1 OF 1
				REV B	

4

3

2

1