



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	240131
B	CHANGE P/N DEFINATION	MW	240404
C	CHANGE LENGTH	MW	240906

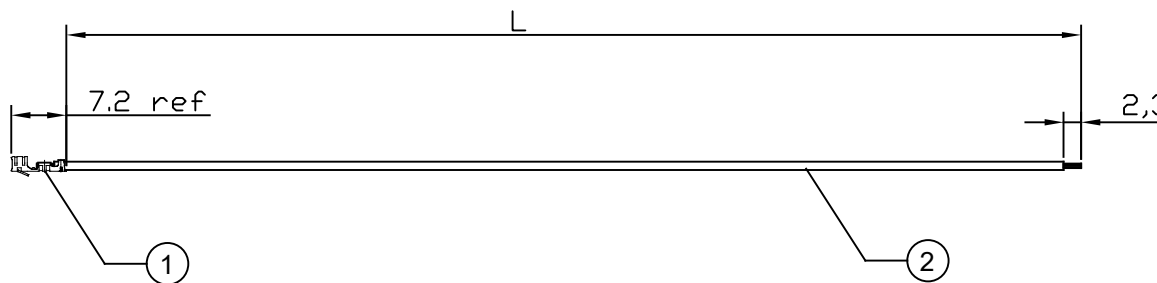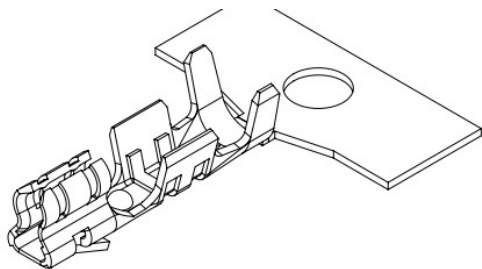

CONBEONE PN	L(MM)	TOLERANCE	WIRE COLOR
CB020318-101	100	±6	BLACK
CB020318-102	200	±8	BLACK
CB020318-103	300	±10	BLACK
CB020318-104	500	±10	BLACK
CB020318-105	1000	±10	BLACK
CB020318-101-RD	100	±6	RED
CB020318-102-RD	200	±8	RED
CB020318-103-RD	300	±10	RED
CB020318-104-RD	500	±10	RED
CB020318-105-RD	1000	±10	RED
CB020318-101-BN	100	±6	BROWN
CB020318-102-BN	200	±8	BROWN
CB020318-103-BN	300	±10	BROWN
CB020318-104-BN	500	±10	BROWN
CB020318-105-BN	1000	±10	BROWN
CB020318-101-2GY	100	±6	G/Y (黄绿)
CB020318-102-2GY	200	±8	G/Y (黄绿)
CB020318-103-2GY	300	±10	G/Y (黄绿)
CB020318-104-2GY	500	±10	G/Y (黄绿)
CB020318-105-2GY	1000	±10	G/Y (黄绿)

CONBEONE PN	L(MM)	TOLERANCE	WIRE COLOR
CB020318-101-BE	100	±6	BLUE
CB020318-102-BE	200	±8	BLUE
CB020318-103-BE	300	±10	BLUE
CB020318-104-BE	500	±10	BLUE
CB020318-105-BE	1000	±10	BLUE
CB020318-101-WE	100	±6	WHITE
CB020318-102-WE	200	±8	WHITE
CB020318-103-WE	300	±10	WHITE
CB020318-104-WE	500	±10	WHITE
CB020318-105-WE	1000	±10	WHITE
CB020318-101-YW	100	±6	YELLOW
CB020318-102-YW	200	±8	YELLOW
CB020318-103-YW	300	±10	YELLOW
CB020318-104-YW	500	±10	YELLOW
CB020318-105-YW	1000	±10	YELLOW
CB020318-101-GN	100	±6	GREEN
CB020318-102-GN	200	±8	GREEN
CB020318-103-GN	300	±10	GREEN
CB020318-104-GN	500	±10	GREEN
CB020318-105-GN	1000	±10	GREEN

CONBEONE PN	L(MM)	TOLERANCE	WIRE COLOR
CB020318-101-OE	100	±6	ORANGE
CB020318-102-OE	200	±8	ORANGE
CB020318-103-OE	300	±10	ORANGE
CB020318-104-OE	500	±10	ORANGE
CB020318-105-OE	1000	±10	ORANGE
CB020318-101-PE	100	±6	PURPLE
CB020318-102-PE	200	±8	PURPLE
CB020318-103-PE	300	±10	PURPLE
CB020318-104-PE	500	±10	PURPLE
CB020318-105-PE	1000	±10	PURPLE
CB020318-101-GA	100	±6	GRAY
CB020318-102-GA	200	±8	GRAY
CB020318-103-GA	300	±10	GRAY
CB020318-104-GA	500	±10	GRAY
CB020318-105-GA	1000	±10	GRAY

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICAITON.

2	AR	M	UL1061 HOOK WIRE. 80°C, 300V, 22AWG.													
1	1	PCS	2.50mm PITCH CLICKMATE FEMALE TERMINAL. MOLEX 8701039													
S/N	Q'TY	UNIT	DESCRIPTION													
	GENERAL TOLERANCE UNLESS SPECIFIED:		APPROVED	P/N:		CONBEONE www.conbeone.com										
	0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		RW	SEE TABLE												
			CHECKED	DOC#		TITLE: 2.5MM MINI SPOX PRE-CRIMPED LEAD, SE										
			CT	SD-CB020318-1												
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.						DRAWN	CUSTOMER COPY					SIZE	UNIT	SCALE	PAGE	REV
						MW						A4	MM	N.T.S	1 OF 1	C

4

3

2

1



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	240131
B	CHANGE P/N DEFINATION	MW	240404
C	CHANGE LENGTH	MW	240906

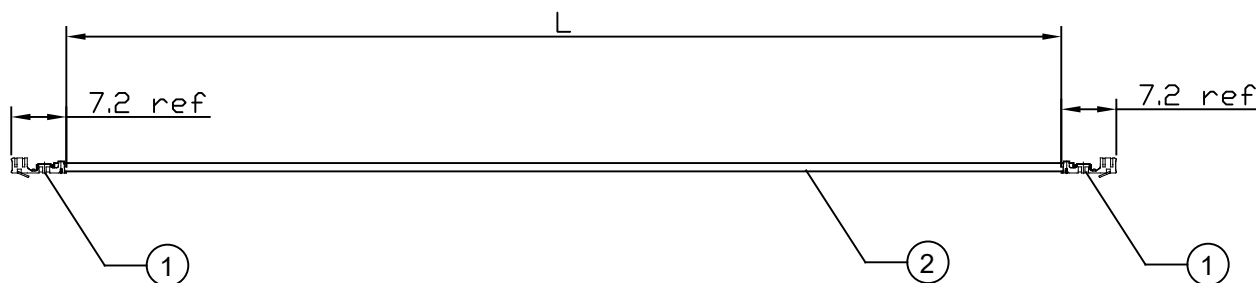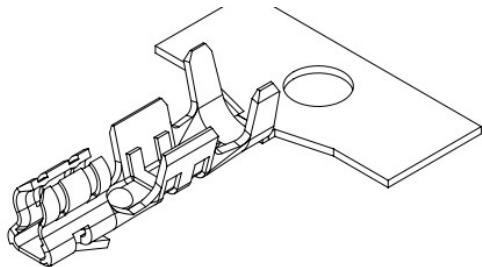

CONBEONE PN	L(MM)	TOLERANCE	WIRE COLOR
CB020318-001	100	±6	BLACK
CB020318-002	200	±8	BLACK
CB020318-003	300	±10	BLACK
CB020318-004	500	±10	BLACK
CB020318-005	1000	±10	BLACK
CB020318-001-RD	100	±6	RED
CB020318-002-RD	200	±8	RED
CB020318-003-RD	300	±10	RED
CB020318-004-RD	500	±10	RED
CB020318-005-RD	1000	±10	RED
CB020318-001-BN	100	±6	BROWN
CB020318-002-BN	200	±8	BROWN
CB020318-003-BN	300	±10	BROWN
CB020318-004-BN	500	±10	BROWN
CB020318-005-BN	1000	±10	BROWN
CB020318-001-2GY	100	±6	G/Y (黄绿)
CB020318-002-2GY	200	±8	G/Y (黄绿)
CB020318-003-2GY	300	±10	G/Y (黄绿)
CB020318-004-2GY	500	±10	G/Y (黄绿)
CB020318-005-2GY	1000	±10	G/Y (黄绿)

CONBEONE PN	L(MM)	TOLERANCE	WIRE COLOR
CB020318-001-BE	100	±6	BLUE
CB020318-002-BE	200	±8	BLUE
CB020318-003-BE	300	±10	BLUE
CB020318-004-BE	500	±10	BLUE
CB020318-005-BE	1000	±10	BLUE
CB020318-001-WE	100	±6	WHITE
CB020318-002-WE	200	±8	WHITE
CB020318-003-WE	300	±10	WHITE
CB020318-004-WE	500	±10	WHITE
CB020318-005-WE	1000	±10	WHITE
CB020318-001-YW	100	±6	YELLOW
CB020318-002-YW	200	±8	YELLOW
CB020318-003-YW	300	±10	YELLOW
CB020318-004-YW	500	±10	YELLOW
CB020318-005-YW	1000	±10	YELLOW
CB020318-001-GN	100	±6	GREEN
CB020318-002-GN	200	±8	GREEN
CB020318-003-GN	300	±10	GREEN
CB020318-004-GN	500	±10	GREEN
CB020318-005-GN	1000	±10	GREEN

CONBEONE PN	L(MM)	TOLERANCE	WIRE COLOR
CB020318-001-OE	100	±6	ORANGE
CB020318-002-OE	200	±8	ORANGE
CB020318-003-OE	300	±10	ORANGE
CB020318-004-OE	500	±10	ORANGE
CB020318-005-OE	1000	±10	ORANGE
CB020318-001-PE	100	±6	PURPLE
CB020318-002-PE	200	±8	PURPLE
CB020318-003-PE	300	±10	PURPLE
CB020318-004-PE	500	±10	PURPLE
CB020318-005-PE	1000	±10	PURPLE
CB020318-001-GA	100	±6	GRAY
CB020318-002-GA	200	±8	GRAY
CB020318-003-GA	300	±10	GRAY
CB020318-004-GA	500	±10	GRAY
CB020318-005-GA	1000	±10	GRAY

2	AR	M	UL1061 HOOK WIRE. 80°C, 300V, 22AWG				
1	2	PCS	2.50mm PITCH CLICKMATE FEMALE TERMINAL. MOLEX 8701039				
S/N	Q'TY	UNIT	DESCRIPTION				
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com		
			RW	SEE TABLE			
			CHECKED	DOC#	TITLE: 2.5MM MINI SPOX PRE-CRIMPED LEAD, DE		
			CT	SD-CB020318-0			
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION			DRAWN	CUSTOMER COPY			
			MW				
			SIZE	UNIT	DOCUMENT	PAGE	REV
A4	MM	N.T.S	1 OF 1	C			

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICAITON.

4

3

2

1