


4

3


2

1


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/10/29
B	UPDATE	MW	25/9/23

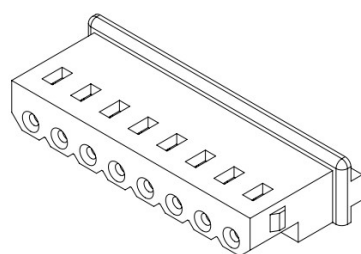

2-8極
2-8 CIRCUIT

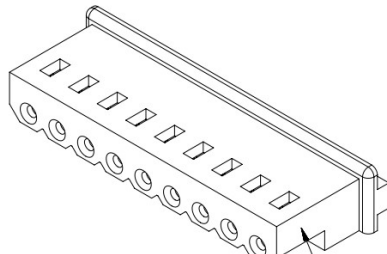

9-15極
9-15 CIRCUIT

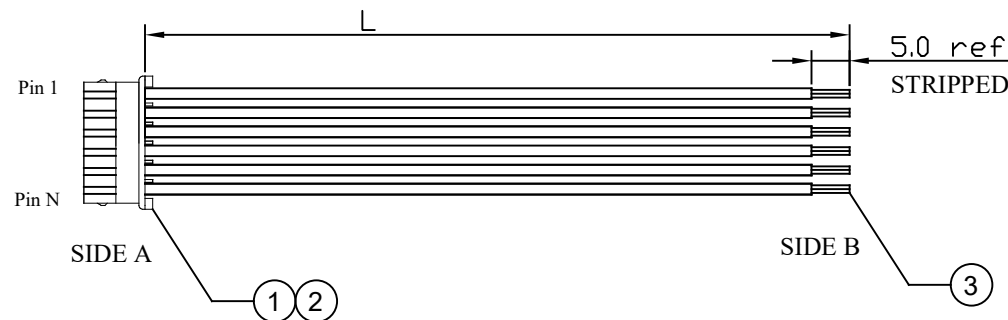

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB020319-021	100	±6	50-37-5023
2	CB020319-022	200	±6	50-37-5023
2	CB020319-023	300	±6	50-37-5023
2	CB020319-024	500	±8	50-37-5023
2	CB020319-025	1000	±10	50-37-5023
3	CB020319-031	100	±6	50-37-5033
3	CB020319-032	200	±6	50-37-5033
3	CB020319-033	300	±6	50-37-5033
3	CB020319-034	500	±8	50-37-5033
3	CB020319-035	1000	±10	50-37-5033
4	CB020319-041	100	±6	50-37-5043
4	CB020319-042	200	±6	50-37-5043
4	CB020319-043	300	±6	50-37-5043
4	CB020319-044	500	±8	50-37-5043
4	CB020319-045	1000	±10	50-37-5043
5	CB020319-051	100	±6	50-37-5053
5	CB020319-052	200	±6	50-37-5053
5	CB020319-053	300	±6	50-37-5053
5	CB020319-054	500	±8	50-37-5053
5	CB020319-055	1000	±10	50-37-5053
6	CB020319-061	100	±6	50-37-5063
6	CB020319-062	200	±6	50-37-5063
6	CB020319-063	300	±6	50-37-5063
6	CB020319-064	500	±8	50-37-5063
6	CB020319-065	1000	±10	50-37-5063
7	CB020319-071	100	±6	50-37-5073
7	CB020319-072	200	±6	50-37-5073
7	CB020319-073	300	±6	50-37-5073
7	CB020319-074	500	±8	50-37-5073
7	CB020319-075	1000	±10	50-37-5073
8	CB020319-081	100	±6	50-37-5083
8	CB020319-082	200	±6	50-37-5083
8	CB020319-083	300	±6	50-37-5083
8	CB020319-084	500	±8	50-37-5083
8	CB020319-085	1000	±10	50-37-5083

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
9	CB020319-091	100	±6	50-37-5093
9	CB020319-092	200	±6	50-37-5093
9	CB020319-093	300	±6	50-37-5093
9	CB020319-094	500	±8	50-37-5093
9	CB020319-095	1000	±10	50-37-5093
10	CB020319-101	100	±6	50-37-5103
10	CB020319-102	200	±6	50-37-5103
10	CB020319-103	300	±6	50-37-5103
10	CB020319-104	500	±8	50-37-5103
10	CB020319-105	1000	±10	50-37-5103
11	CB020319-111	100	±6	50-37-5113
11	CB020319-112	200	±6	50-37-5113
11	CB020319-113	300	±6	50-37-5113
11	CB020319-114	500	±8	50-37-5113
11	CB020319-115	1000	±10	50-37-5113
12	CB020319-121	100	±6	50-37-5123
12	CB020319-122	200	±6	50-37-5123
12	CB020319-123	300	±6	50-37-5123
12	CB020319-124	500	±8	50-37-5123
12	CB020319-125	1000	±10	50-37-5123
13	CB020319-131	100	±6	50-37-5133
13	CB020319-132	200	±6	50-37-5133
13	CB020319-133	300	±6	50-37-5133
13	CB020319-134	500	±8	50-37-5133
13	CB020319-135	1000	±10	50-37-5133
14	CB020319-141	100	±6	50-37-5143
14	CB020319-142	200	±6	50-37-5143
14	CB020319-143	300	±6	50-37-5143
14	CB020319-144	500	±8	50-37-5143
14	CB020319-145	1000	±10	50-37-5143
15	CB020319-151	100	±6	50-37-5153
15	CB020319-152	200	±6	50-37-5153
15	CB020319-153	300	±6	50-37-5153
15	CB020319-154	500	±8	50-37-5153
15	CB020319-155	1000	±10	50-37-5153

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Black	stripped	50-37-5023
PIN 2	Black	stripped	50-37-5033
PIN 3	Black	stripped	50-37-5043
PIN 4	Black	stripped	50-37-5053
PIN 5	Black	stripped	50-37-5063
PIN 6	Black	stripped	50-37-5073
PIN 7	Black	stripped	50-37-5083
PIN 8	Black	stripped	50-37-5093
PIN 9	Black	stripped	50-37-5103
PIN 10	Black	stripped	50-37-5113
PIN 11	Black	stripped	50-37-5123
PIN 12	Black	stripped	50-37-5133
PIN 13	Black	stripped	50-37-5143
PIN 14	Black	stripped	50-37-5153
PIN 15	Black	stripped	50-37-5153

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, BLACK, 22AWG							
2	N	PCS	2.50mm PITCH MINI SPOX FEMALE TERMINAL, MOLEX 8701039							
1	I	PCS	2.50mm PITCH MINI SPOX FEMALE HSG, MOLEX 5037-5XX3							
S/N	Q'TY	UNIT	DESCRIPTION							
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED	P/N:	CONBEONE www.conbeone.com					
			RW	SEE TABLE						
			CHECKED	DOC#	TITLE: MOLEX 2.50MM PITCH OTS MINI SPOX, 5264, SINGLE END, TYPE BSE					
			CT	SD-CB020319						
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION			DRAWN	CUSTOMER COPY		SIZE	UNIT	SCALE	PAGE	REV
			MW			A4	MM	N.T.S	1 OF 1	B

4

3

2

1