


4

3


2

1


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/01/31
B	UPDATE	MW	25/9/23

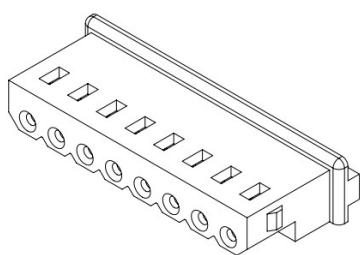

2-8極
2-8 CIRCUIT

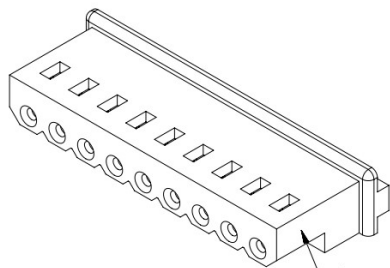

9-15極
9-15 CIRCUIT

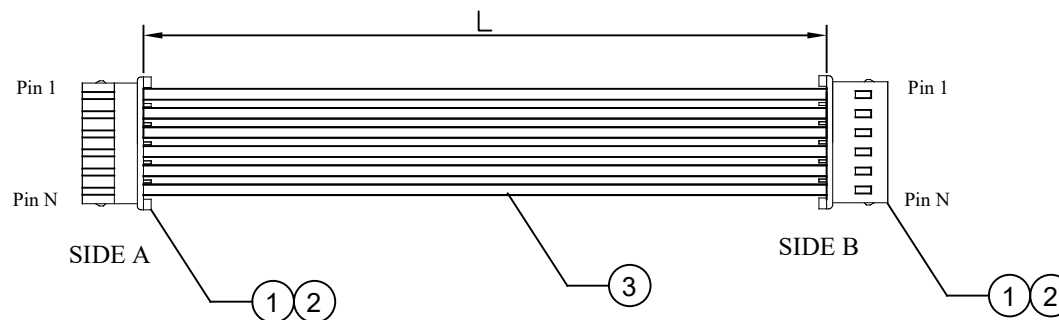

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Black	PIN 1	
PIN 2	Black	PIN 2	50-37-5023
PIN 3	Black	PIN 3	50-37-5033
PIN 4	Black	PIN 4	50-37-5043
PIN 5	Black	PIN 5	50-37-5053
PIN 6	Black	PIN 6	50-37-5063
PIN 7	Black	PIN 7	50-37-5073
PIN 8	Black	PIN 8	50-37-5083
PIN 9	Black	PIN 9	50-37-5093
PIN 10	Black	PIN 10	50-37-5103
PIN 11	Black	PIN 11	50-37-5113
PIN 12	Black	PIN 12	50-37-5123
PIN 13	Black	PIN 13	50-37-5133
PIN 14	Black	PIN 14	50-37-5143
PIN 15	Black	PIN 15	50-37-5153

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, BLACK, 22AWG							
2	2N	PCS	2.50mm PITCH MINI SPOX FEMALE TERMINAL, MOLEX 8701039							
1	2	PCS	2.50mm PITCH MINI SPOX FEMALE HSG, MOLEX 5037-5XX3							
S/N	Q'TY	UNIT	DESCRIPTION							
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com					
			RW	SEE TABLE						
			CHECKED	DOC#						
			CT	SD-CB020321	TITLE: MOLEX 2.50MM PITCH OTS MINI SPOX,5264, DUAL ENDS TYPE B,TYPE BD					
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN	CUSTOMER COPY		SIZE	UNIT	SCALE	PAGE	REV
			MW			A4	MM	N.T.S	1 OF 1	B

4

3

2

1