
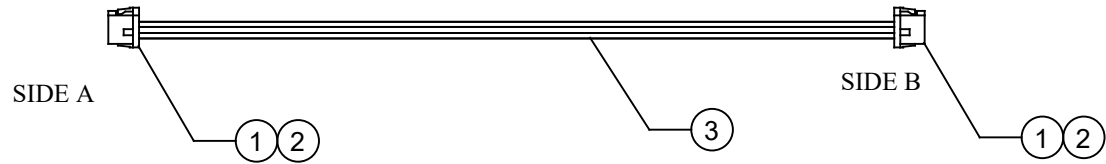
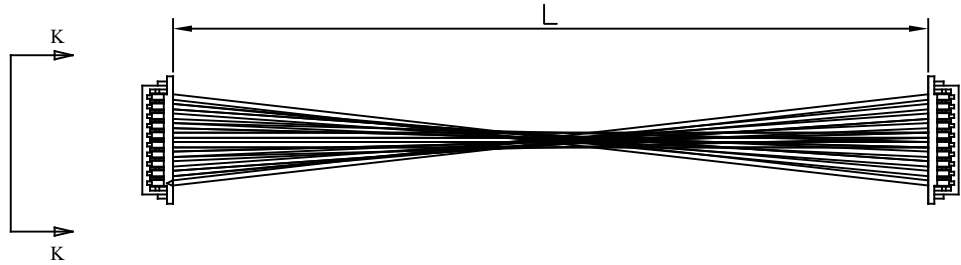


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/06/19
B	CORRECT ERRORS	MW	24/11/07

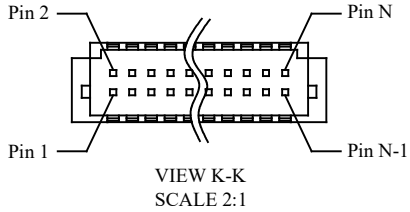

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
10	CB020337-011	100	±6	DF13-10DS-1.25CC
10	CB020337-012	200	±6	DF13-10DS-1.25CC
10	CB020337-013	300	±6	DF13-10DS-1.25CC
10	CB020337-014	500	±8	DF13-10DS-1.25CC
10	CB020337-015	1000	±10	DF13-10DS-1.25CC
20	CB020337-021	100	±6	DF13-20DS-1.25CC
20	CB020337-022	200	±6	DF13-20DS-1.25CC
20	CB020337-023	300	±6	DF13-20DS-1.25CC
20	CB020337-024	500	±8	DF13-20DS-1.25CC
20	CB020337-025	1000	±10	DF13-20DS-1.25CC
30	CB020337-031	100	±6	DF13-30DS-1.25CC
30	CB020337-032	200	±6	DF13-30DS-1.25CC
30	CB020337-033	300	±6	DF13-30DS-1.25CC
30	CB020337-034	500	±8	DF13-30DS-1.25CC
30	CB020337-035	1000	±10	DF13-30DS-1.25CC
40	CB020337-041	100	±6	DF13-40DS-1.25CC
40	CB020337-042	200	±6	DF13-40DS-1.25CC
40	CB020337-043	300	±6	DF13-40DS-1.25CC
40	CB020337-044	500	±8	DF13-40DS-1.25CC
40	CB020337-045	1000	±10	DF13-40DS-1.25CC

WIRE CHART:

SIDE A	SIDE B
PIN 1	PIN 1
PIN 2	PIN 2
PIN N	PIN N

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICAITON.

3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, BLACK, 26AWG							
2	2N	PCS	1.25MM PITCH DF13 FEMALE TERMINAL, HRS DF13-2630SCF							
1	2	PCS	1.25MM PITCH DF13 FEMALE HSG, DUAL ROW, HRS DF13-XXDS-1.25C							
S/N	Q'TY	UNIT	DESCRIPTION							
			GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED RW	PIN: SEE TABLE	CONBEONE www.conbeone.com			
			CHECKED CT		DOC# SD-CB020337	TITLE: HRS1.25MM PITCH OTS DF13, DUAL ROW, DUAL ENDS				
			THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.		DRAWN MW	CUSTOMER COPY			SIZE A4	UNIT MM