



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/06/19

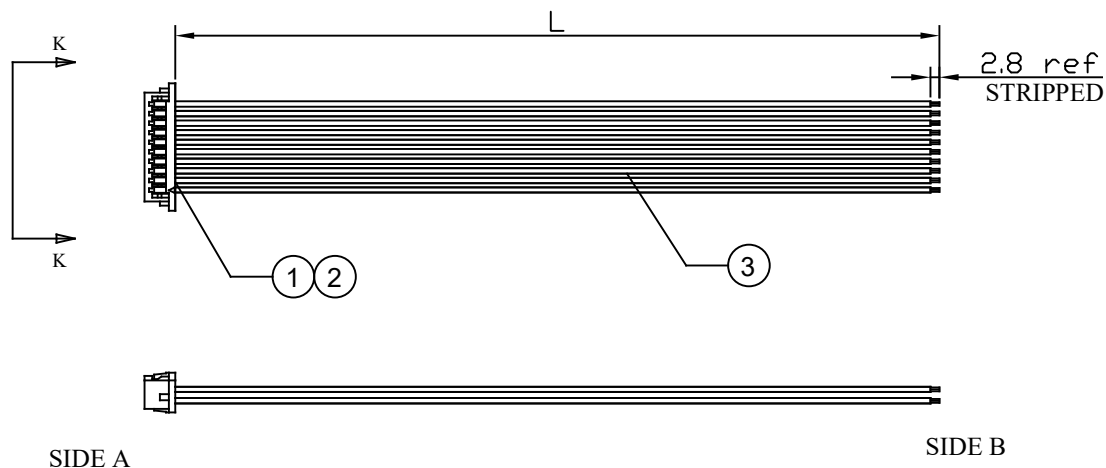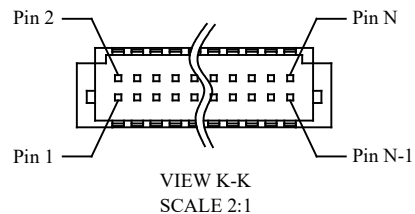

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
10	CB020363-011	100	±6	DF13-10DS-1.25C
10	CB020363-012	200	±6	DF13-10DS-1.25C
10	CB020363-013	300	±6	DF13-10DS-1.25C
10	CB020363-014	500	±8	DF13-10DS-1.25C
10	CB020363-015	1000	±10	DF13-10DS-1.25C
20	CB020363-021	100	±6	DF13-20DS-1.25C
20	CB020363-022	200	±6	DF13-20DS-1.25C
20	CB020363-023	300	±6	DF13-20DS-1.25C
20	CB020363-024	500	±8	DF13-20DS-1.25C
20	CB020363-025	1000	±10	DF13-20DS-1.25C
30	CB020363-031	100	±6	DF13-30DS-1.25C
30	CB020363-032	200	±6	DF13-30DS-1.25C
30	CB020363-033	300	±6	DF13-30DS-1.25C
30	CB020363-034	500	±8	DF13-30DS-1.25C
30	CB020363-035	1000	±10	DF13-30DS-1.25C
40	CB020363-041	100	±6	DF13-40DS-1.25C
40	CB020363-042	200	±6	DF13-40DS-1.25C
40	CB020363-043	300	±6	DF13-40DS-1.25C
40	CB020363-044	500	±8	DF13-40DS-1.25C
40	CB020363-045	1000	±10	DF13-40DS-1.25C

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

SIDE A		SIDE B	Housing P/N
PIN 1	Red	stripped	DF13-10DS-1.25C
PIN 2	Black	stripped	
PIN 3	Yellow	stripped	
PIN 4	Green	stripped	
PIN 5	Blue	stripped	
PIN 6	White	stripped	
PIN 7	Orange	stripped	
PIN 8	Gray	stripped	
PIN 9	Purple	stripped	
PIN 10	Brown	stripped	
PIN 11	Red	stripped	DF13-20DS-1.25C
PIN 12	Black	stripped	
PIN 13	Yellow	stripped	
PIN 14	Green	stripped	
PIN 15	Blue	stripped	
PIN 16	White	stripped	
PIN 17	Orange	stripped	
PIN 18	Gray	stripped	
PIN 19	Purple	stripped	
PIN 20	Brown	stripped	
PIN 21	Red	stripped	DF13-30DS-1.25C
PIN 22	Black	stripped	
PIN 23	Yellow	stripped	
PIN 24	Green	stripped	
PIN 25	Blue	stripped	
PIN 26	White	stripped	
PIN 27	Orange	stripped	
PIN 28	Gray	stripped	
PIN 29	Purple	stripped	
PIN 30	Brown	stripped	
PIN 31	Red	stripped	DF13-40DS-1.25C
PIN 32	Black	stripped	
PIN 33	Yellow	stripped	
PIN 34	Green	stripped	
PIN 35	Blue	stripped	
PIN 36	White	stripped	
PIN 37	Orange	stripped	
PIN 38	Gray	stripped	
PIN 39	Purple	stripped	
PIN 40	Brown	stripped	

3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, SEE TABLE, 26AWG										
2	N	PCS	1.25MM PITCH DF13 FEMALE TERMINAL, HRS DF13-2830SCF										
1	I	PCS	1.25MM PITCH DF13 FEMALE HSG, DUAL ROW, HRS DF13-XXDS-1.25C										
S/N	Q'TY	UNIT	DESCRIPTION										
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED	P/N:		CONBEONE www.conbeone.com							
			RW	SEE TABLE									
			CHECKED	DOC#		TITLE: HRS1.25MM PITCH OTS DF13, DUAL ROW, SINGLE END							
			CT	SD-CB020363									
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN	CUSTOMER COPY					SIZE	UNIT	SCALE	PAGE	REV
			MW						A4	MM	N.T.S	1 OF 1	A

4

3

2

1