
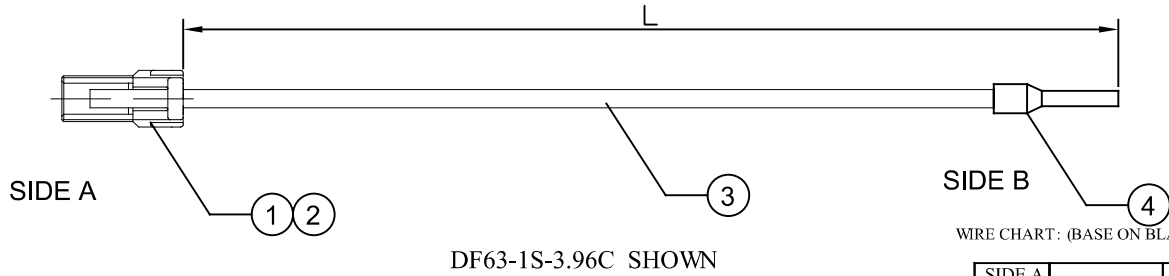
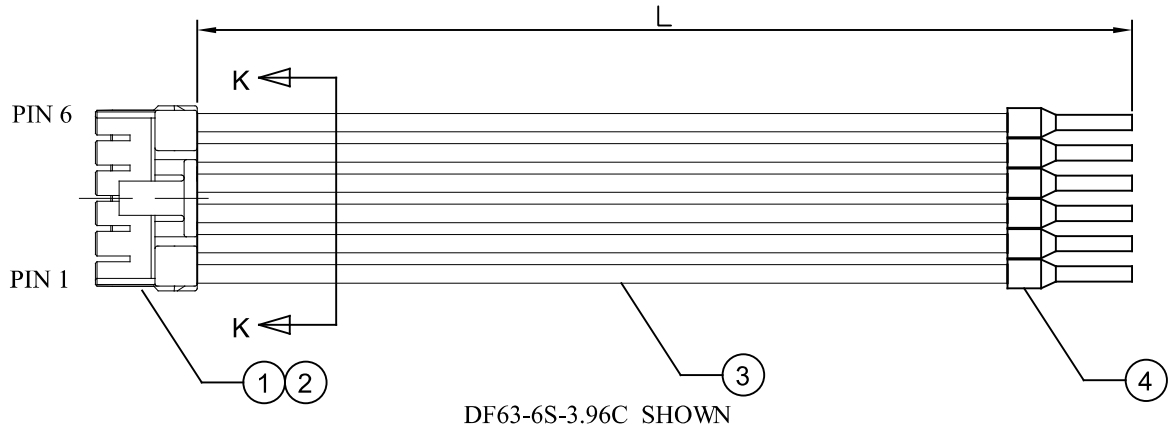


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	251201

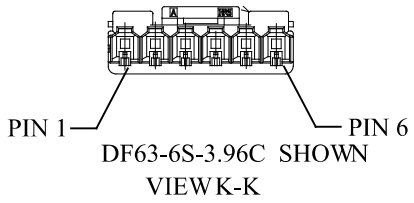

Part Number Role:
CB020408-011-BK

Color Code:
Blank: Black
RD: Red
YW: Yellow
GN: Green
BE: Blue
WE: White

Length Code

- CKTS
- 01: 1P
 - 02: 2P
 - 03: 3P
 - 04: 4P
 - 05: 5P
 - 06: 6P

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
1	CB020408-011	100	±3	DF63-1S-3.96C
1	CB020408-012	200	±4	DF63-1S-3.96C
1	CB020408-013	300	±4	DF63-1S-3.96C
1	CB020408-014	500	±5	DF63-1S-3.96C
1	CB020408-015	1000	±5	DF63-1S-3.96C
1	CB020408-016	150	±3	DF63-1S-3.96C
2	CB020408-021	100	±3	DF63-2S-3.96C
2	CB020408-022	200	±4	DF63-2S-3.96C
2	CB020408-023	300	±4	DF63-2S-3.96C
2	CB020408-024	500	±5	DF63-2S-3.96C
2	CB020408-025	1000	±5	DF63-2S-3.96C
2	CB020408-026	150	±3	DF63-2S-3.96C
3	CB020408-031	100	±3	DF63-3S-3.96C
3	CB020408-032	200	±4	DF63-3S-3.96C
3	CB020408-033	300	±4	DF63-3S-3.96C
3	CB020408-034	500	±5	DF63-3S-3.96C
3	CB020408-035	1000	±5	DF63-3S-3.96C
3	CB020408-036	150	±3	DF63-3S-3.96C
4	CB020408-041	100	±3	DF63-4S-3.96C
4	CB020408-042	200	±4	DF63-4S-3.96C
4	CB020408-043	300	±4	DF63-4S-3.96C
4	CB020408-044	500	±5	DF63-4S-3.96C
4	CB020408-045	1000	±5	DF63-4S-3.96C
4	CB020408-046	150	±3	DF63-4S-3.96C
5	CB020408-051	100	±3	DF63-5S-3.96C
5	CB020408-052	200	±4	DF63-5S-3.96C
5	CB020408-053	300	±4	DF63-5S-3.96C
5	CB020408-054	500	±5	DF63-5S-3.96C
5	CB020408-055	1000	±5	DF63-5S-3.96C
5	CB020408-056	150	±3	DF63-5S-3.96C
6	CB020408-061	100	±3	DF63-6S-3.96C
6	CB020408-062	200	±4	DF63-6S-3.96C
6	CB020408-063	300	±4	DF63-6S-3.96C
6	CB020408-064	500	±5	DF63-6S-3.96C
6	CB020408-065	1000	±5	DF63-6S-3.96C
6	CB020408-066	150	±3	DF63-6S-3.96C

WIRE CHART: (BASE ON BLACK WIRES)

SIDE A	Color	SIDE B	Housing P/N
PIN 1	Black	E1510	DF63-1S-3.96C
PIN 2	Black	E1510	DF63-2S-3.96C
PIN 3	Black	E1510	DF63-3S-3.96C
PIN 4	Black	E1510	DF63-4S-3.96C
PIN 5	Black	E1510	DF63-5S-3.96C
PIN 6	Black	E1510	DF63-6S-3.96C

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

4	AR	PCS	TUEB TERMINAL , E1510, RED	
3	AR	M	UL3239 SILLICON RUBBER CABLE, 16AWG, 150°C, 3KV, COLOR SEE TABLE	
2	N	PCS	3.96MM PITCH CRIMPED FEMALE TERMINAL, 16-18AWG, HRS DF63A-1618SCF	
1	1	PCS	3.96 Pitch, VH Series Housing, N Type, JST: DF63-xS-3.96C	
S/N	Q'TY	UNIT	DESCRIPTION	
		APPROVED	P/N: SEE TABLE	
		RW		
		CHECKED	DOCH#	
		CT	SD-CB020408	
		DRAWN	CUSTOMER COPY	
		MW		
SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S	1 OF 1	A

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.