

4

3

2

1

REV. A

CHANG DESCRIPTION NEW RELEASE

BY MW

DATE 250205

D

C

B

A

11 ref

L

5.0 ref

STRIPPED

1

2

CONBEONE P/N	L(MM)	TOLERANCE	WIRE COLOR
CB020598-101	100	±6	BLACK
CB020598-102	200	±6	BLACK
CB020598-103	300	±8	BLACK
CB020598-104	500	±10	BLACK
CB020598-105	1000	±10	BLACK
CB020598-106	150	±6	BLACK
CB020598-107	700	±10	BLACK
CB020598-101-RD	100	±6	RED
CB020598-102-RD	200	±6	RED
CB020598-103-RD	300	±8	RED
CB020598-104-RD	500	±10	RED
CB020598-105-RD	1000	±10	RED
CB020598-106-RD	150	±6	RED
CB020598-107-RD	700	±10	RED
CB020598-101-YW	100	±6	YELLOW
CB020598-102-YW	200	±6	YELLOW
CB020598-103-YW	300	±8	YELLOW
CB020598-104-YW	500	±10	YELLOW
CB020598-105-YW	1000	±10	YELLOW
CB020598-106-YW	150	±6	YELLOW
CB020598-107-YW	700	±10	YELLOW
CB020598-101-GN	100	±6	GREEN
CB020598-102-GN	200	±6	GREEN
CB020598-103-GN	300	±8	GREEN
CB020598-104-GN	500	±10	GREEN
CB020598-105-GN	1000	±10	GREEN
CB020598-106-GN	150	±6	GREEN
CB020598-107-GN	700	±10	GREEN

CONBEONE P/N	L(MM)	TOLERANCE	WIRE COLOR
CB020598-101-BE	100	±6	BLUE
CB020598-102-BE	200	±6	BLUE
CB020598-103-BE	300	±8	BLUE
CB020598-104-BE	500	±10	BLUE
CB020598-105-BE	1000	±10	BLUE
CB020598-106-BE	150	±6	BLUE
CB020598-107-BE	700	±10	BLUE
CB020598-101-WE	100	±6	WHITE
CB020598-102-WE	200	±6	WHITE
CB020598-103-WE	300	±8	WHITE
CB020598-104-WE	500	±10	WHITE
CB020598-105-WE	1000	±10	WHITE
CB020598-106-WE	150	±6	WHITE
CB020598-107-WE	700	±10	WHITE
CB020598-101-OR	100	±6	ORANGE
CB020598-102-OR	200	±6	ORANGE
CB020598-103-OR	300	±8	ORANGE
CB020598-104-OR	500	±10	ORANGE
CB020598-105-OR	1000	±10	ORANGE
CB020598-106-OR	150	±6	ORANGE
CB020598-107-OR	700	±10	ORANGE
CB020598-101-GA	100	±6	GRAY
CB020598-102-GA	200	±6	GRAY
CB020598-103-GA	300	±8	GRAY
CB020598-104-GA	500	±10	GRAY
CB020598-105-GA	1000	±10	GRAY
CB020598-106-GA	150	±6	GRAY
CB020598-107-GA	700	±10	GRAY

CONPEONE P/N	L(MM)	TOLERANCE	WIRE COLOR
CB020598-101-PE	100	±6	PURPLE
CB020598-102-PE	200	±6	PURPLE
CB020598-103-PE	300	±8	PURPLE
CB020598-104-PE	500	±10	PURPLE
CB020598-105-PE	1000	±10	PURPLE
CB020598-106-PE	150	±6	PURPLE
CB020598-107-PE	700	±10	PURPLE
CB020598-101-BN	100	±6	BROWN
CB020598-102-BN	200	±6	BROWN
CB020598-103-BN	300	±8	BROWN
CB020598-104-BN	500	±10	BROWN
CB020598-105-BN	1000	±10	BROWN
CB020598-106-BN	150	±6	BROWN
CB020598-107-BN	700	±10	BROWN

REMARK:

1) ROHS 2.0 COMPLIANT.

2) MEET IPC-620 SPECIFICAITON.

2	AR	M	UL1061 HOOK WIRE, 80°C, 300V, 20AWG			
1	1	PCS	3.0mm PITCH MALE TERMINAL, TIN PLATED, 20-24awg, MOLEX43030-0001			
S/N	Q'TY	UNIT	DESCRIPTION			
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED RW SEE TABLE			
			CHECKED CT DOCF CB020598-0			
			DRAWN MW CUSTOMER COPY			
			SIZE A4	UNIT MM	SCALE N.T.S	PAGE 1 OF 1

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION

CONBEONE
www.conbeone.com

TITLE: Molex Micro Fit Wire Harness
3.0mm 430300001 Crimped Lead, SE


4

3

2

1

Dongguan Conbeone Technology co., ltd

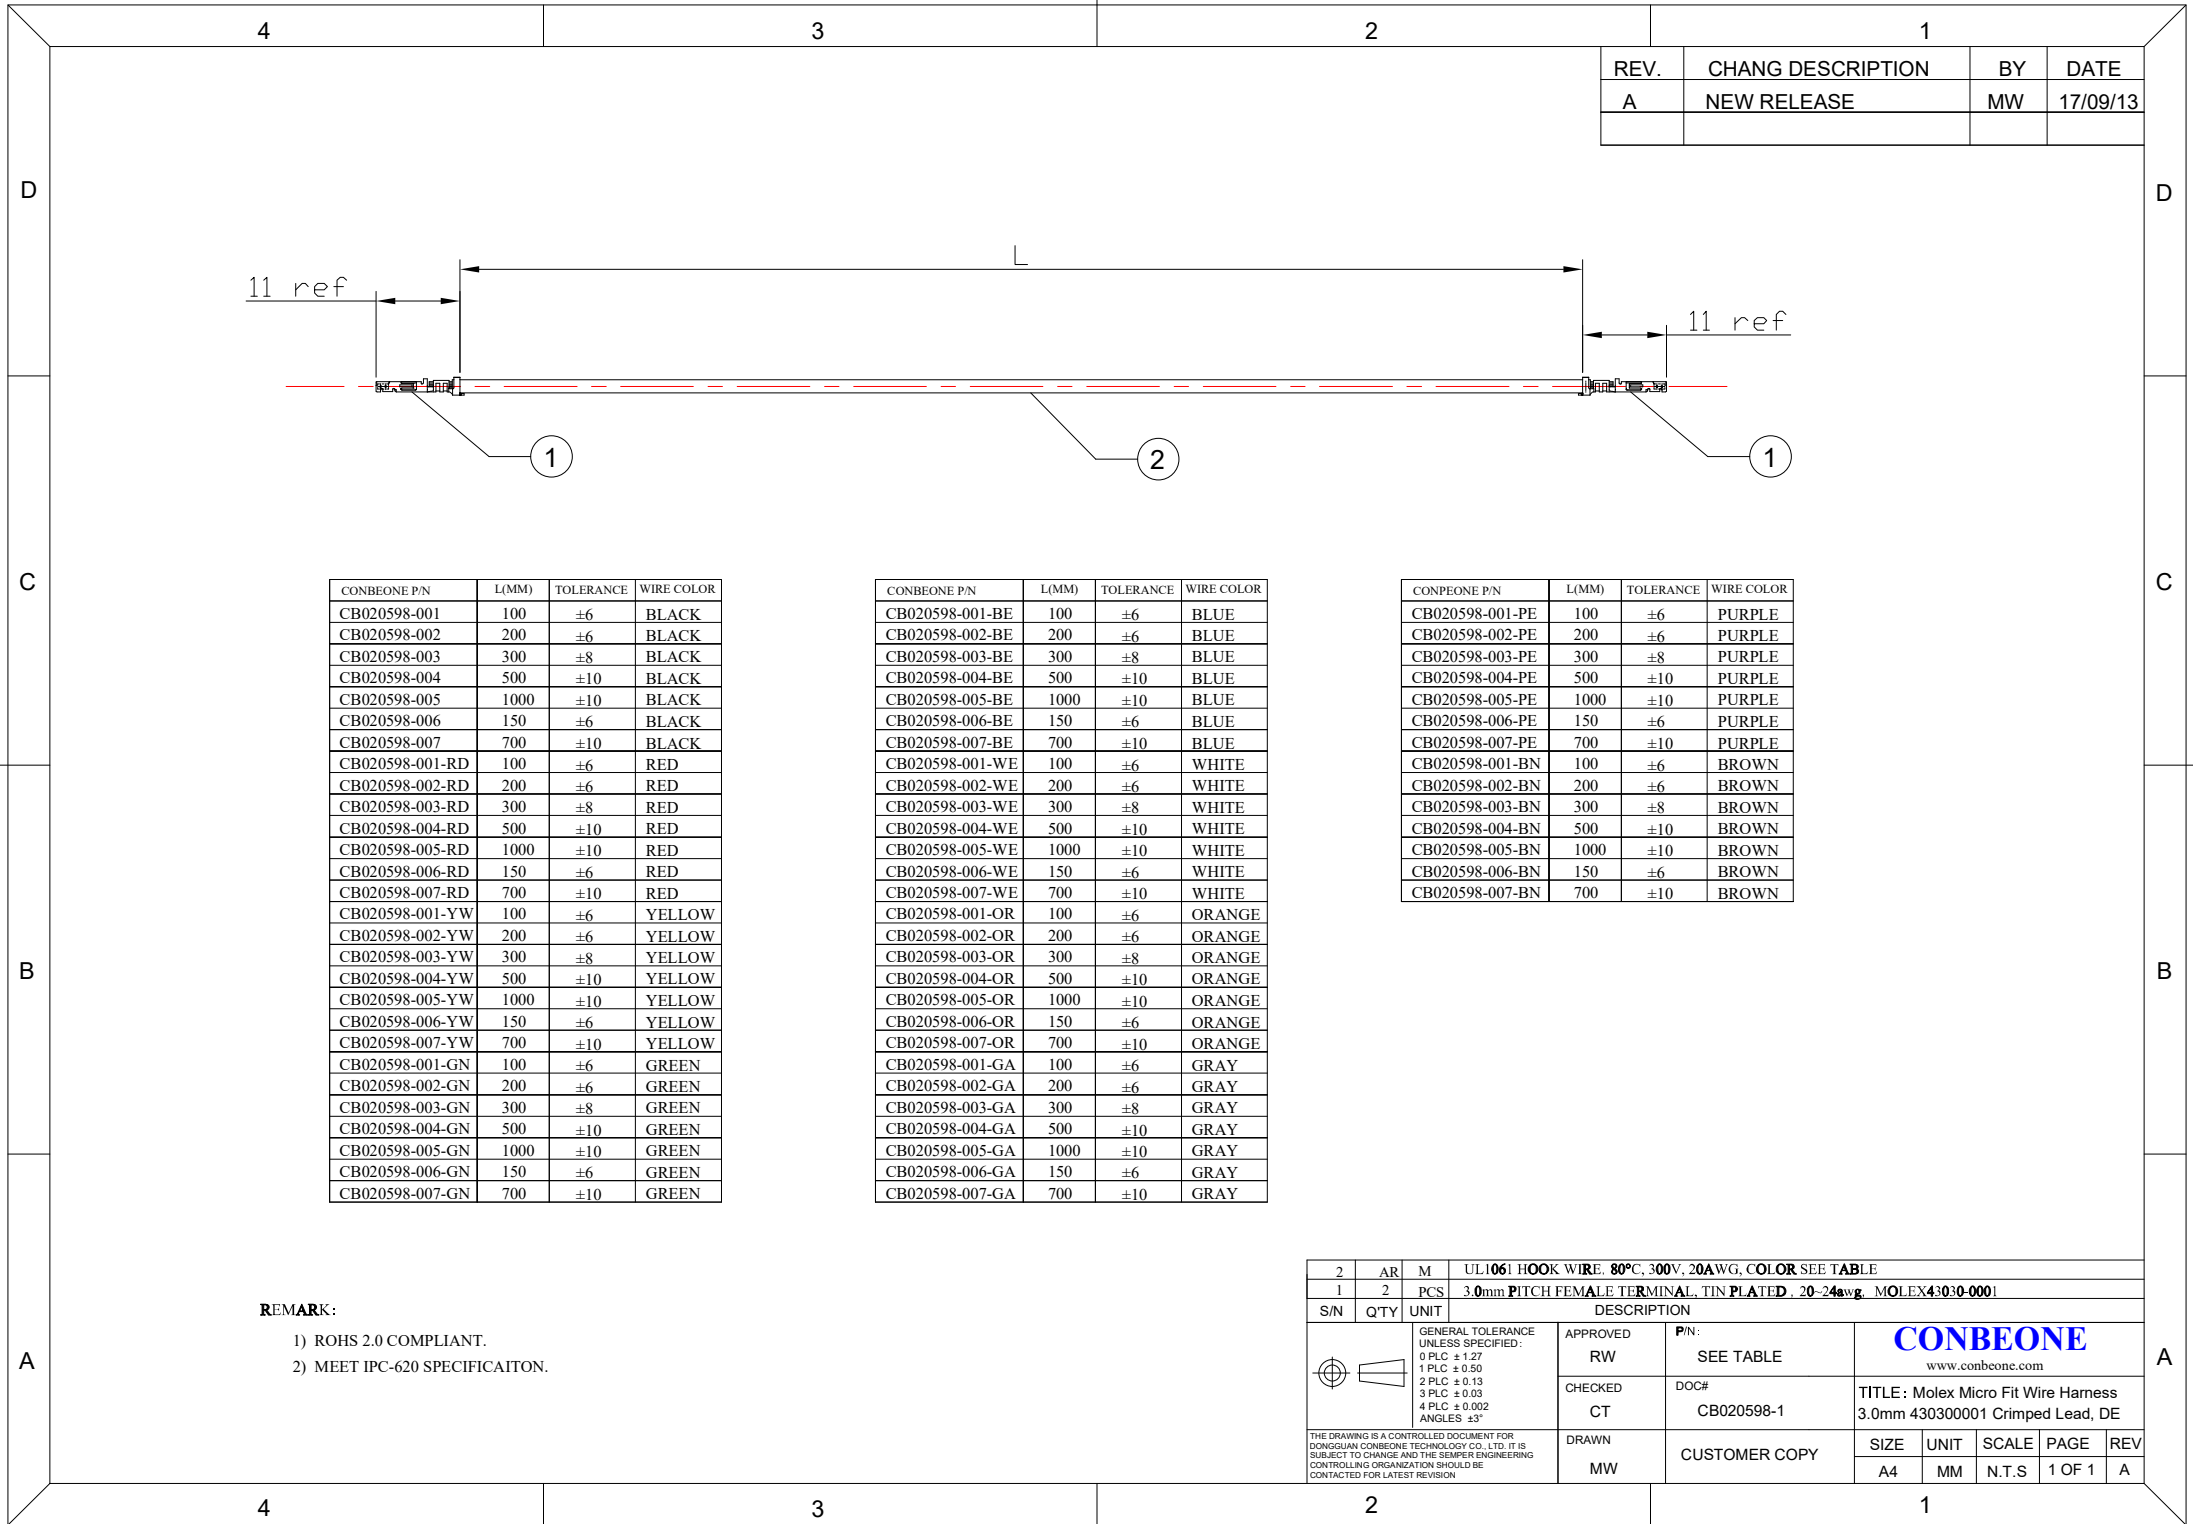

CONBEONE

www.conbeone.com

TITLE: Molex Micro Fit Wire Harness 3.0mm 430300001 Crimped Lead, DE

4

3

2

1

Dongguan Conbeone Technology co., ltd