


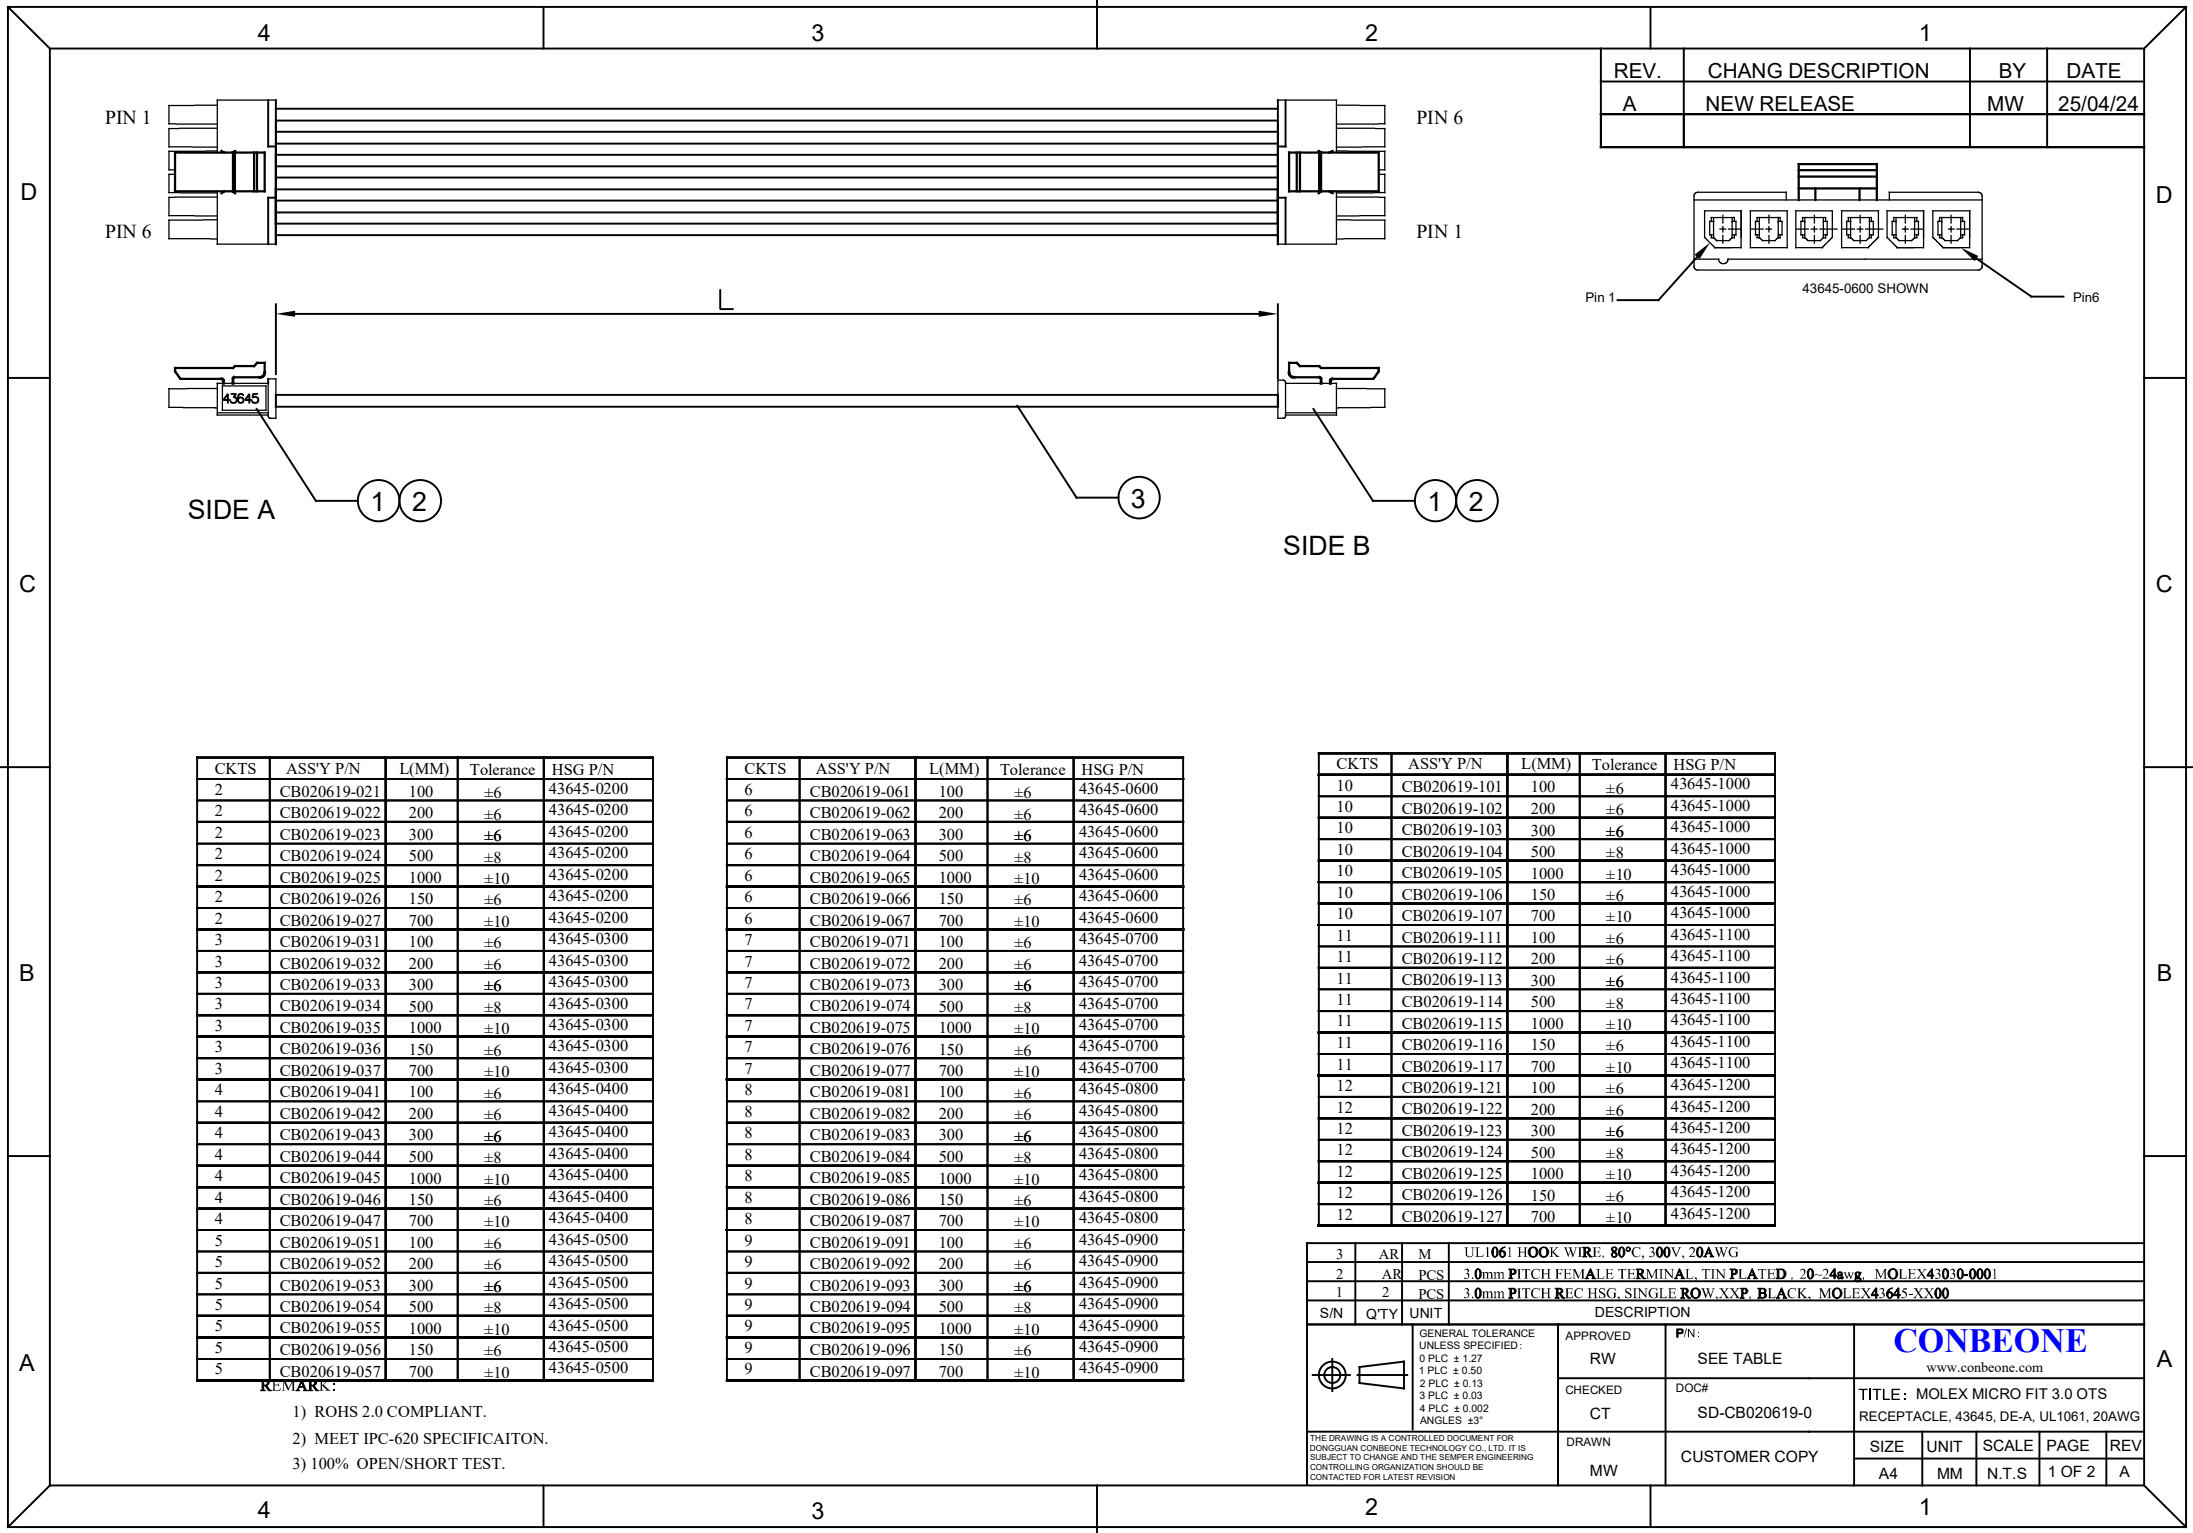

4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/01/16

WIRE CHART:

43645-0200

SIDE A		SIDE B
PIN 1	——Black	PIN 2
PIN 2	——Black	PIN 1

43645-0300

SIDE A		SIDE B
PIN 1	——Black	PIN 3
PIN 2	——Black	PIN 2
PIN 3	——Black	PIN 1

43645-0400

SIDE A		SIDE B
PIN 1	——Black	PIN 4
PIN 2	——Black	PIN 3
PIN 3	——Black	PIN 2
PIN 4	——Black	PIN 1

43645-0500

SIDE A		SIDE B
PIN 1	——Black	PIN 5
PIN 2	——Black	PIN 4
PIN 3	——Black	PIN 3
PIN 4	——Black	PIN 2
PIN 5	——Black	PIN 1

43645-0600

SIDE A		SIDE B
PIN 1	——Black	PIN 6
PIN 2	——Black	PIN 5
PIN 3	——Black	PIN 4
PIN 4	——Black	PIN 3
PIN 5	——Black	PIN 2
PIN 6	——Black	PIN 1

43645-0700

SIDE A		SIDE B
PIN 1	——Black	PIN 7
PIN 2	——Black	PIN 6
PIN 3	——Black	PIN 5
PIN 4	——Black	PIN 4
PIN 5	——Black	PIN 3
PIN 6	——Black	PIN 2
PIN 7	——Black	PIN 1

43645-0800

SIDE A		SIDE B
PIN 1	——Black	PIN 8
PIN 2	——Black	PIN 7
PIN 3	——Black	PIN 6
PIN 4	——Black	PIN 5
PIN 5	——Black	PIN 4
PIN 6	——Black	PIN 3
PIN 7	——Black	PIN 2
PIN 8	——Black	PIN 1

43645-0900

SIDE A		SIDE B
PIN 1	——Black	PIN 9
PIN 2	——Black	PIN 8
PIN 3	——Black	PIN 7
PIN 4	——Black	PIN 6
PIN 5	——Black	PIN 5
PIN 6	——Black	PIN 4
PIN 7	——Black	PIN 3
PIN 8	——Black	PIN 2
PIN 9	——Black	PIN 1

43645-1000


SIDE A		SIDE B
PIN 1	——Black	PIN 10
PIN 2	——Black	PIN 9
PIN 3	——Black	PIN 8
PIN 4	——Black	PIN 7
PIN 5	——Black	PIN 6
PIN 6	——Black	PIN 5
PIN 7	——Black	PIN 4
PIN 8	——Black	PIN 3
PIN 9	——Black	PIN 2
PIN 10	——Black	PIN 1

43645-1100

SIDE A		SIDE B
PIN 1	——Black	PIN 11
PIN 2	——Black	PIN 10
PIN 3	——Black	PIN 9
PIN 4	——Black	PIN 8
PIN 5	——Black	PIN 7
PIN 6	——Black	PIN 6
PIN 7	——Black	PIN 5
PIN 8	——Black	PIN 4
PIN 9	——Black	PIN 3
PIN 10	——Black	PIN 2
PIN 11	——Black	PIN 1

43645-1200

SIDE A		SIDE B
PIN 1	——Black	PIN 12
PIN 2	——Black	PIN 11
PIN 3	——Black	PIN 10
PIN 4	——Black	PIN 9
PIN 5	——Black	PIN 8
PIN 6	——Black	PIN 7
PIN 7	——Black	PIN 6
PIN 8	——Black	PIN 5
PIN 9	——Black	PIN 4
PIN 10	——Black	PIN 3
PIN 11	——Black	PIN 2
PIN 12	——Black	PIN 1



GENERAL TOLERANCE
UNLESS APPROVED
0 PLC ± 1.27
1 PLC ± 0.50
2 PLC ± 0.13
3 PLC ± 0.03
4 PLC ± 0.002
ANGLES $\pm 3^\circ$

THE DRAWING IS A CONTROLLED DOCUMENT FOR
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING
CONTROLLING ORGANIZATION SHOULD BE
CONTACTED FOR LATEST REVISION

APPROVED
P/N:
RW

CHECKED
CT

DRAWN
MW

P/N:
SEE TABLE

DOC#
SD-CB020619-1

CUSTOMER COPY

CONBEONE
www.conbeone.com

TITLE: MOLEX MICRO FIT 3.0 OTS
RECEPTACLE, 43645, DE-A, UL1061, 20AWG

SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S	2 OF 2	A

4

3

2

1