


4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250205

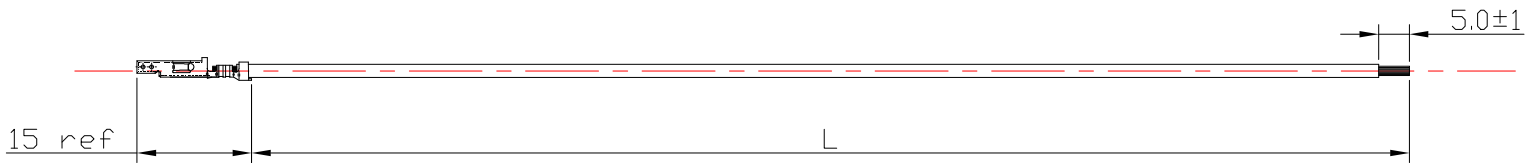

PART NUMBER MATRIX:

P/N (BLACK WIRES SHOWN)	L(MM)	TOLERANCE	NOMINAL L
CB020700-101-BK	105	±5	100
CB020700-102-BK	205	±5	200
CB020700-103-BK	305	±5	300
CB020700-104-BK	505	±8	500
CB020700-105-BK	1005	±8	1000
CB020700-106-BK	155	±5	150
CB020700-107-BK	705	±8	700

PART NUMBER RULES:

CB020700-101-BK

- COLOR CODE:
- BK: BLACK
- RD: RED
- YW: YELLOW
- GN: GREEN
- BE: BLUE
- WE: WHITE
- OE: ORANGE
- GA: GRAY
- PE: PURPLE
- BN: BROWN

LENGTH CODE

- WIRE TYPE CODE
- 0: DUAL ENDED
- 1: SINGLE ENDED

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

2	AR	M	UL1061 HOOK WIRE, 80°C, 300V, 18AWG, COLOR SEE TABLE												
1	1	PCS	4.2mm PITCH MALE TERMINAL, TIN PLATED, 18-24awg, MOLEX39000038												
S/N	Q'TY	UNIT	DESCRIPTION												
	GENERAL TOLERANCE UNLESS SPECIFIED:		APPROVED	P/N:											
	0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±8°		RW	SEE TABLE											
			CHECKED	DOC#	<p style="text-align: center;"><b>CONBEONE</b></p> <p style="text-align: center;">www.conbeone.com</p> <p>TITLE: Molex Mini Fit Wire Harness 4.2mm 39000038 Crimped Lead, SE</p>										
			CT	CB020700-0											
<small>THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.</small>			DRAWN	CUSTOMER COPY	<table border="1"> <tr> <th>SIZE</th> <th>UNIT</th> <th>SCALE</th> <th>PAGE</th> <th>REV</th> </tr> <tr> <td>A4</td> <td>MM</td> <td>N.T.S</td> <td>1 OF 1</td> <td>A</td> </tr> </table>	SIZE	UNIT	SCALE	PAGE	REV	A4	MM	N.T.S	1 OF 1	A
SIZE	UNIT	SCALE	PAGE	REV											
A4	MM	N.T.S	1 OF 1	A											
			MW												

4

3

2

1


4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	17/09/13



## PART NUMBER MATRIX:

P/N (BLACK WIRES SHOWN)	L(MM)	TOLERANCE	NOMINAL L
CB020700-001-BK	110	±5	100
CB020700-002-BK	210	±5	200
CB020700-003-BK	310	±5	300
CB020700-004-BK	510	±8	500
CB020700-005-BK	1010	±8	1000
CB020700-006-BK	160	±5	150
CB020700-007-BK	710	±8	700

## PART NUMBER RULES:

CB020700-001-BK

## COLOR CODE:

BK: BLACK  
RD: RED  
YW: YELLOW  
GN: GREEN  
BE: BLUE  
WE: WHITE  
OE: ORANGE  
GA: GRAY  
PE: PURPLE  
BN: BROWN

## LENGTH CODE

WIRE TYPE CODE  
0: DUAL ENDED  
1: SINGLE ENDED

## REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

2	AR	M	UL1061 HOOK WIRE, 80°C, 300V, 18AWG, COLOR SEE TABLE
1	2	PCS	4.2mm PITCH MALE TERMINAL, TIN PLATED, 18-24awg, MOLEX39000038
S/N	Q'TY	UNIT	DESCRIPTION
	GENERAL TOLERANCE UNLESS SPECIFIED:		APPROVED
	0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±8°		RW
		CHECKED	P/N:
		CT	SEE TABLE
		DRAWN	DOC#
		MW	CB020700-1
		TITLE: Molex Mini Fit Wire Harness 4.2mm 39000038 Crimped Lead, DE	
		CUSTOMER COPY	SIZE UNIT SCALE PAGE REV
			A4 MM N.T.S 1 OF 1 A

THE DRAWING IS A CONTROLLED DOCUMENT FOR  
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS  
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING  
CONTROLLING ORGANIZATION SHOULD BE  
CONTACTED FOR LATEST REVISION.

**CONBEONE**  
www.conbeone.com

4

3

2

1