


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/12/10

PKT'S	CONBEONE P/N	LAMBDA	TOLERANCE	HOUSING	UL CLASS
3P	CB020711-031	100	±6	39-01-4030	UL 94V-2
3P	CB020711-032	200	±6	39-01-4030	UL 94V-2
3P	CB020711-033	300	±8	39-01-4030	UL 94V-2
3P	CB020711-034	500	±10	39-01-4030	UL 94V-2
3P	CB020711-035	1000	±10	39-01-4030	UL 94V-2
3P	CB020711-036	150	±10	39-01-4030	UL 94V-2
3P	CB020711-037	700	±10	39-01-4030	UL 94V-2
3P	CB020711-131	100	±6	39-01-4031	UL 94V-0
3P	CB020711-132	200	±6	39-01-4031	UL 94V-0
3P	CB020711-133	300	±8	39-01-4031	UL 94V-0
3P	CB020711-134	500	±10	39-01-4031	UL 94V-0
3P	CB020711-135	1000	±10	39-01-4031	UL 94V-0
3P	CB020711-136	150	±10	39-01-4031	UL 94V-0
3P	CB020711-137	700	±10	39-01-4031	UL 94V-0
4P	CB020711-041	100	±6	39-01-4040	UL 94V-2
4P	CB020711-042	200	±6	39-01-4040	UL 94V-2
4P	CB020711-043	300	±8	39-01-4040	UL 94V-2
4P	CB020711-044	500	±10	39-01-4040	UL 94V-2
4P	CB020711-045	1000	±10	39-01-4040	UL 94V-2
4P	CB020711-046	150	±10	39-01-4040	UL 94V-2
4P	CB020711-047	700	±10	39-01-4040	UL 94V-2
4P	CB020711-141	100	±6	39-01-4041	UL 94V-0
4P	CB020711-142	200	±6	39-01-4041	UL 94V-0
4P	CB020711-143	300	±8	39-01-4041	UL 94V-0
4P	CB020711-144	500	±10	39-01-4041	UL 94V-0
4P	CB020711-145	1000	±10	39-01-4041	UL 94V-0
4P	CB020711-146	150	±10	39-01-4041	UL 94V-0
4P	CB020711-147	700	±10	39-01-4041	UL 94V-0
5P	CB020711-051	100	±6	39-01-4050	UL 94V-2
5P	CB020711-052	200	±6	39-01-4050	UL 94V-2
5P	CB020711-053	300	±8	39-01-4050	UL 94V-2
5P	CB020711-054	500	±10	39-01-4050	UL 94V-2
5P	CB020711-055	1000	±10	39-01-4050	UL 94V-2
5P	CB020711-056	150	±10	39-01-4050	UL 94V-2
5P	CB020711-057	700	±10	39-01-4050	UL 94V-2
5P	CB020711-151	100	±6	39-01-4051	UL 94V-0
5P	CB020711-152	200	±6	39-01-4051	UL 94V-0
5P	CB020711-153	300	±8	39-01-4051	UL 94V-0
5P	CB020711-154	500	±10	39-01-4051	UL 94V-0
5P	CB020711-155	1000	±10	39-01-4051	UL 94V-0
5P	CB020711-156	150	±10	39-01-4051	UL 94V-0
5P	CB020711-157	700	±10	39-01-4051	UL 94V-0

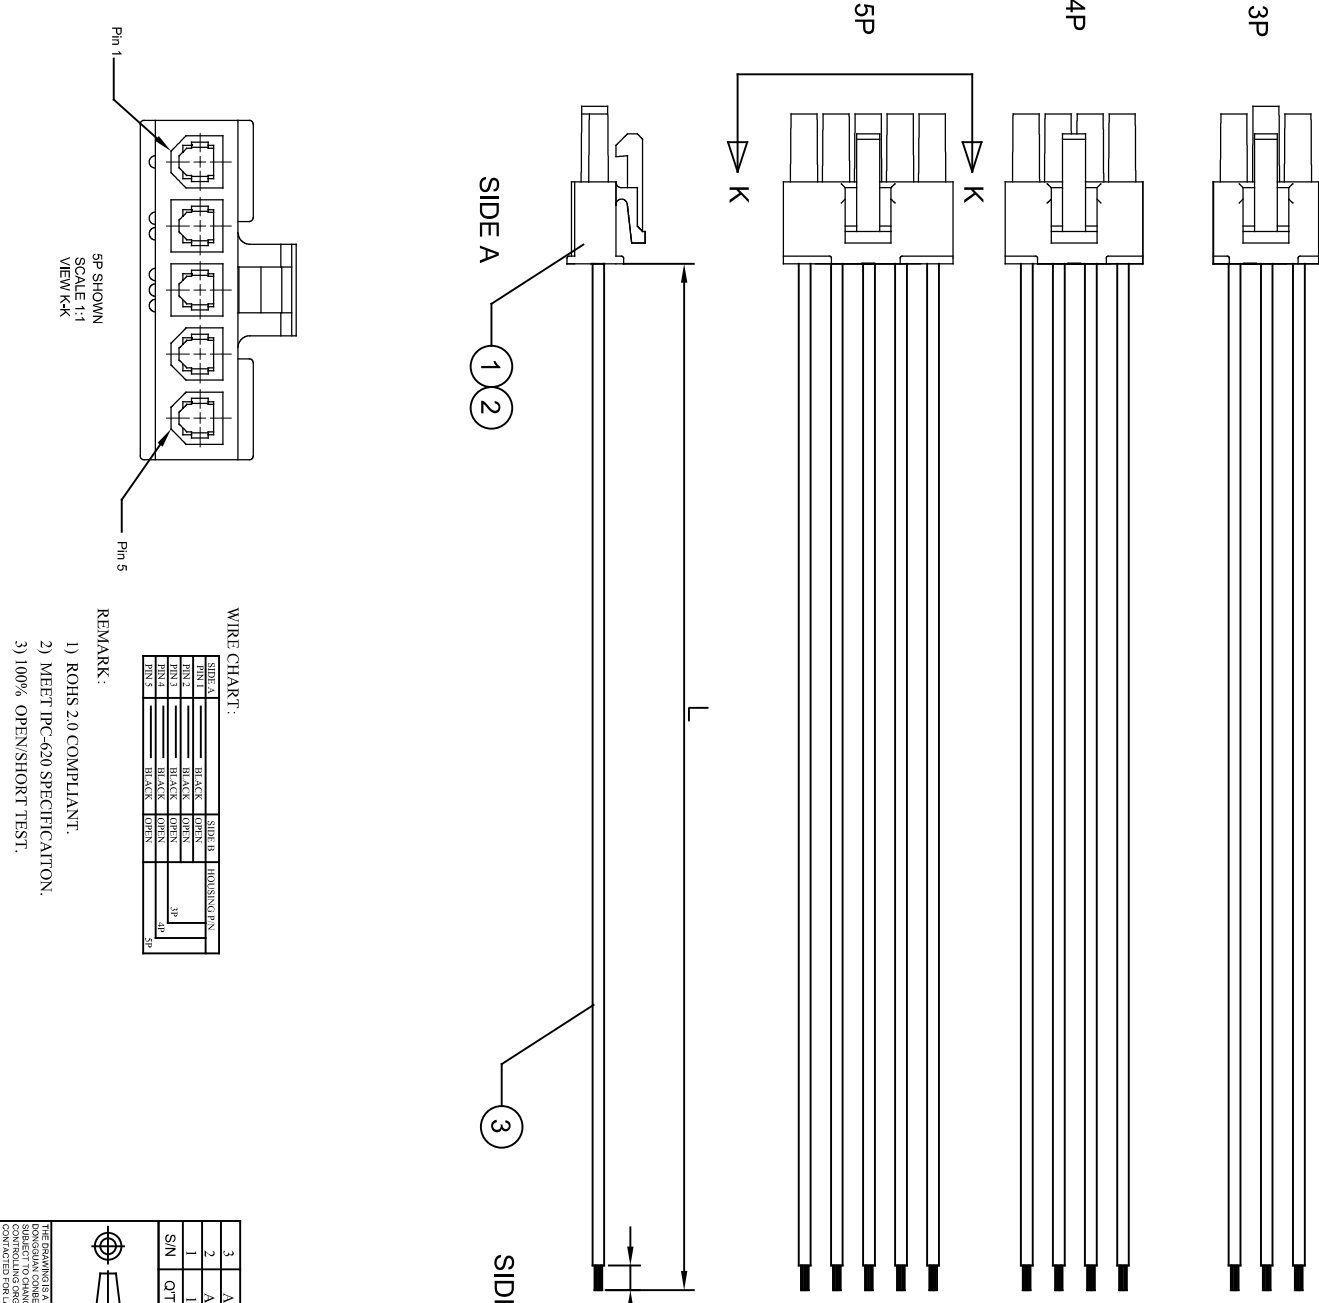

WIRE CHART:

SIDE A	SIDE B	HOUSING PINS
PIN 1	BLK/CK	OPEN
PIN 2	BLK/CK	OPEN
PIN 3	BLK/CK	OPEN
PIN 4	BLK/CK	OPEN
PIN 5	BLK/CK	OPEN

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.
- 3) 100% OPEN/SHORT TEST.

3	AR	M	UL1061 HOOK WIRE, 300V, 18AWG, BLACK
2	AR	RCS	4.2mm PITCH EVALE TERMINAL, TIN PLATED, 18-25range, MOL EX39000038
1	RCS	4.2mm PITCH REC HSG, SMD, ROW, XPP, MOL EX3940-40XX	
	S/N	QTY	UNIT
GENERAL TOLERANCE:			
UNLESS SPECIFIED:			
1) F.L.C. ± 1.27			
2) P.L.C. ± 0.13			
3) F.L.C. ± 0.013			
4) P.L.C. ± 0.002			
ANGLES 3P			
APPROVED:			
RW		P/N:	
CHECKED		SEE TABLE	
CT		DOCP# SD-CB020711	
DRAWN		CUSTOMER COPY	
MW		DRAWN	
		TITLE: Molex 4.2mm Mini Fit Wire Harness	
		5557 Series, Single End, BSE-V02	
		SIZE	UNIT
		MM	MM
		N.T.S	N.T.S
		SCALE	PAGE
		1 OF 1	A
		REV	A

