
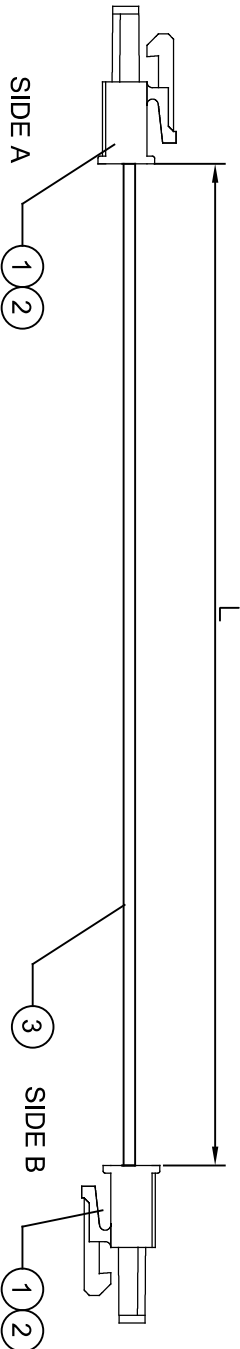


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/12/10

QTY	CONBEONE P/N	MMQ	TOLERANCE	HOLDING	UL CLASS
3P	CB020713-031	100	±6	39-01-4030	UL 94V-2
3P	CB020713-032	200	±6	39-01-4030	UL 94V-2
3P	CB020713-033	300	±8	39-01-4030	UL 94V-2
3P	CB020713-034	500	±10	39-01-4030	UL 94V-2
3P	CB020713-035	1000	±10	39-01-4030	UL 94V-2
3P	CB020713-036	150	±10	39-01-4030	UL 94V-2
3P	CB020713-037	700	±10	39-01-4030	UL 94V-2
3P	CB020713-131	100	±6	39-01-4031	UL 94V-0
3P	CB020713-132	200	±6	39-01-4031	UL 94V-0
3P	CB020713-133	300	±8	39-01-4031	UL 94V-0
3P	CB020713-134	500	±10	39-01-4031	UL 94V-0
3P	CB020713-135	1000	±10	39-01-4031	UL 94V-0
3P	CB020713-136	150	±10	39-01-4031	UL 94V-0
3P	CB020713-137	700	±10	39-01-4031	UL 94V-0
4P	CB020713-041	100	±6	39-01-4040	UL 94V-2
4P	CB020713-042	200	±6	39-01-4040	UL 94V-2
4P	CB020713-043	300	±8	39-01-4040	UL 94V-2
4P	CB020713-044	500	±10	39-01-4040	UL 94V-2
4P	CB020713-045	1000	±10	39-01-4040	UL 94V-2
4P	CB020713-046	150	±10	39-01-4040	UL 94V-2
4P	CB020713-047	700	±10	39-01-4040	UL 94V-2
4P	CB020713-141	100	±6	39-01-4041	UL 94V-0
4P	CB020713-142	200	±6	39-01-4041	UL 94V-0
4P	CB020713-143	300	±8	39-01-4041	UL 94V-0
4P	CB020713-144	500	±10	39-01-4041	UL 94V-0
4P	CB020713-145	1000	±10	39-01-4041	UL 94V-0
4P	CB020713-146	150	±10	39-01-4041	UL 94V-0
4P	CB020713-147	700	±10	39-01-4041	UL 94V-0
5P	CB020713-051	100	±6	39-01-4050	UL 94V-2
5P	CB020713-052	200	±6	39-01-4050	UL 94V-2
5P	CB020713-053	300	±8	39-01-4050	UL 94V-2
5P	CB020713-054	500	±10	39-01-4050	UL 94V-2
5P	CB020713-055	1000	±10	39-01-4050	UL 94V-2
5P	CB020713-056	150	±10	39-01-4050	UL 94V-2
5P	CB020713-057	700	±10	39-01-4050	UL 94V-2
5P	CB020713-151	100	±6	39-01-4051	UL 94V-0
5P	CB020713-152	200	±6	39-01-4051	UL 94V-0
5P	CB020713-153	300	±8	39-01-4051	UL 94V-0
5P	CB020713-154	500	±10	39-01-4051	UL 94V-0
5P	CB020713-155	1000	±10	39-01-4051	UL 94V-0
5P	CB020713-156	150	±10	39-01-4051	UL 94V-0
5P	CB020713-157	700	±10	39-01-4051	UL 94V-0

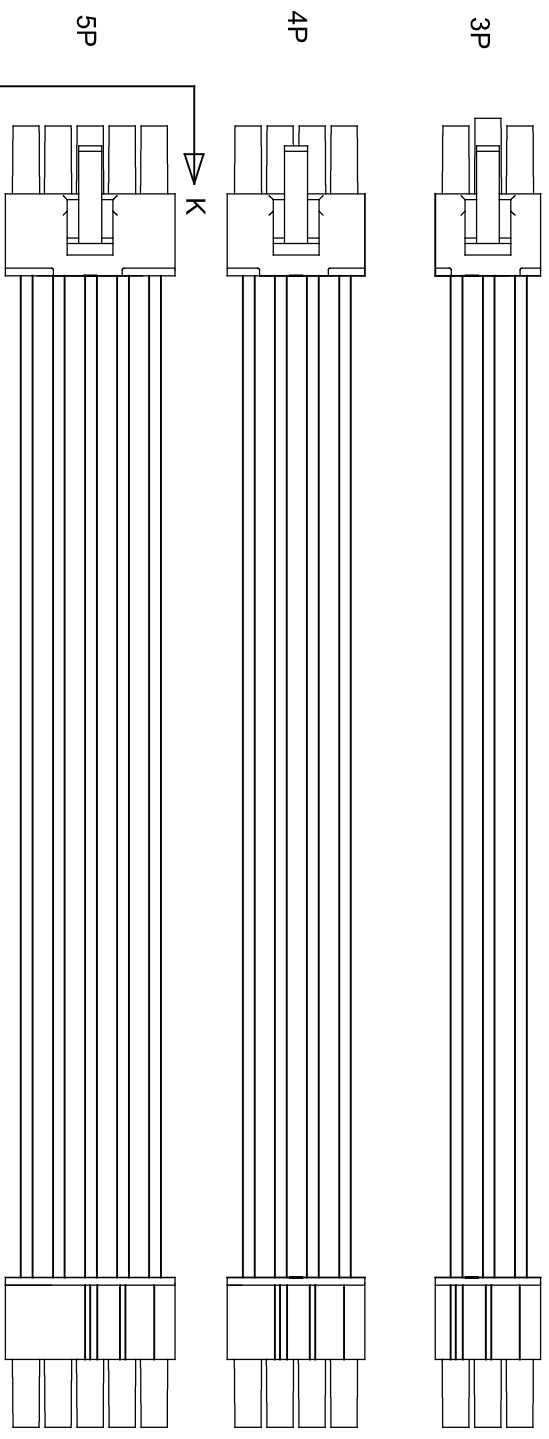


WIRE CHART:

SIDE A	SIDE B	HOUSING PINS
RNS 1	BLACK	RNS 2
RNS 2	BLACK	RNS 3
RNS 3	BLACK	RNS 4
RNS 4	BLACK	RNS 5
RNS 5	BLACK	3P
RNS 6	BLACK	4P
RNS 7	BLACK	5P

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.
- 3) 100% OPEN/SHORT TEST.

5P SHOWN
SCALE 1:1
VIEW:KK

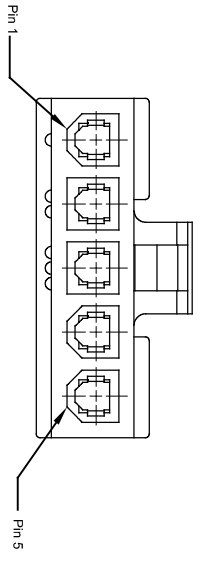

QTY	AR	M	UL1061 HOOK WIRE, 30°C, 300V, 18AWG, BLACK
3	AR	M	UL1061 HOOK WIRE, 30°C, 300V, 18AWG, BLACK
2	AR	RCS	4.2mm PITCH EVALE TERMINAL, TIN PLATED, 18-26range, MOL EX39000038
1	RCS	RCS	4.2mm PITCH REC HSG, SINGLE ROW, XPP, MOL EX3940-40XX

GENERAL TOLERANCE UNLESS SPECIFIED:	APPROVED	PIN:
0 P.C. ± 127	RW	SEE TABLE
2 P.C. ± 0.13	CHECKED	DOCF#
3 P.C. ± 0.03	CT	SD-CB020713
4 P.C. ± 0.02	MW	DRAWN
ANGLES 3P		CUSTOMER COPY

SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S	1 OF 1	A

CONBEONE
www.conbeone.com

TITLE : Molex 4.2mm Mini Fit Wire Harness
5567 Series, Dual Ends Type B, BDBA/02