
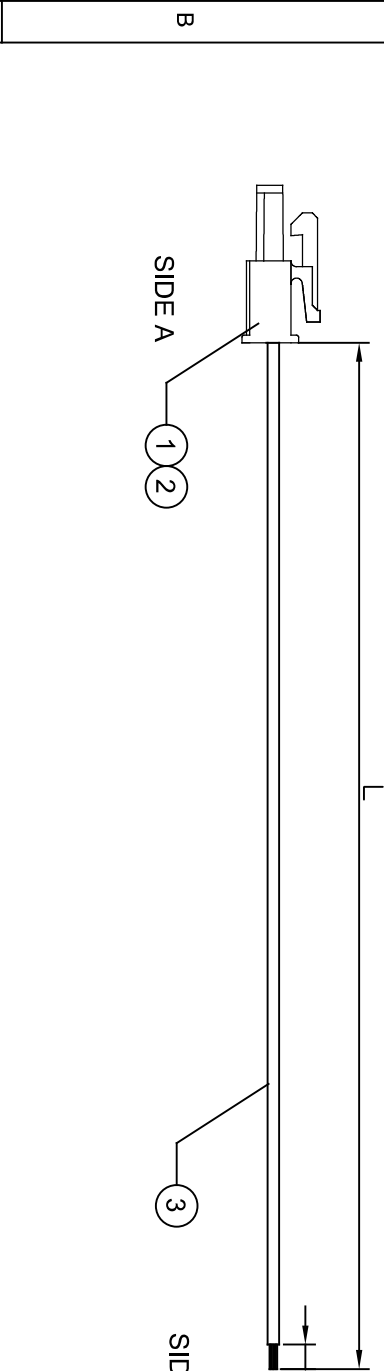


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/12/10

QTY	CONBEONE P/N	LAMBDA	TOLERANCE	HOUSING	UL CLASS
3P	CB020714-031	100	±6	39-01-4030	UL 94V-2
3P	CB020714-032	200	±6	39-01-4030	UL 94V-2
3P	CB020714-033	300	±8	39-01-4030	UL 94V-2
3P	CB020714-034	500	±10	39-01-4030	UL 94V-2
3P	CB020714-035	1000	±10	39-01-4030	UL 94V-2
3P	CB020714-036	150	±10	39-01-4030	UL 94V-2
3P	CB020714-037	700	±10	39-01-4031	UL 94V-0
3P	CB020714-131	100	±6	39-01-4031	UL 94V-0
3P	CB020714-132	200	±6	39-01-4031	UL 94V-0
3P	CB020714-133	300	±8	39-01-4031	UL 94V-0
3P	CB020714-134	500	±10	39-01-4031	UL 94V-0
3P	CB020714-135	1000	±10	39-01-4031	UL 94V-0
3P	CB020714-136	150	±10	39-01-4031	UL 94V-0
3P	CB020714-137	700	±10	39-01-4031	UL 94V-0
4P	CB020714-041	100	±6	39-01-4040	UL 94V-2
4P	CB020714-042	200	±6	39-01-4040	UL 94V-2
4P	CB020714-043	300	±8	39-01-4040	UL 94V-2
4P	CB020714-044	500	±10	39-01-4040	UL 94V-2
4P	CB020714-045	1000	±10	39-01-4040	UL 94V-2
4P	CB020714-046	150	±10	39-01-4040	UL 94V-2
4P	CB020714-047	700	±10	39-01-4040	UL 94V-2
4P	CB020714-141	100	±6	39-01-4041	UL 94V-0
4P	CB020714-142	200	±6	39-01-4041	UL 94V-0
4P	CB020714-143	300	±8	39-01-4041	UL 94V-0
4P	CB020714-144	500	±10	39-01-4041	UL 94V-0
4P	CB020714-145	1000	±10	39-01-4041	UL 94V-0
4P	CB020714-146	150	±10	39-01-4041	UL 94V-0
4P	CB020714-147	700	±10	39-01-4041	UL 94V-0
5P	CB020714-051	100	±6	39-01-4050	UL 94V-2
5P	CB020714-052	200	±6	39-01-4050	UL 94V-2
5P	CB020714-053	300	±8	39-01-4050	UL 94V-2
5P	CB020714-054	500	±10	39-01-4050	UL 94V-2
5P	CB020714-055	1000	±10	39-01-4050	UL 94V-2
5P	CB020714-056	150	±10	39-01-4050	UL 94V-2
5P	CB020714-057	700	±10	39-01-4050	UL 94V-2
5P	CB020714-151	100	±6	39-01-4051	UL 94V-0
5P	CB020714-152	200	±6	39-01-4051	UL 94V-0
5P	CB020714-153	300	±8	39-01-4051	UL 94V-0
5P	CB020714-154	500	±10	39-01-4051	UL 94V-0
5P	CB020714-155	1000	±10	39-01-4051	UL 94V-0
5P	CB020714-156	150	±10	39-01-4051	UL 94V-0
5P	CB020714-157	700	±10	39-01-4051	UL 94V-0

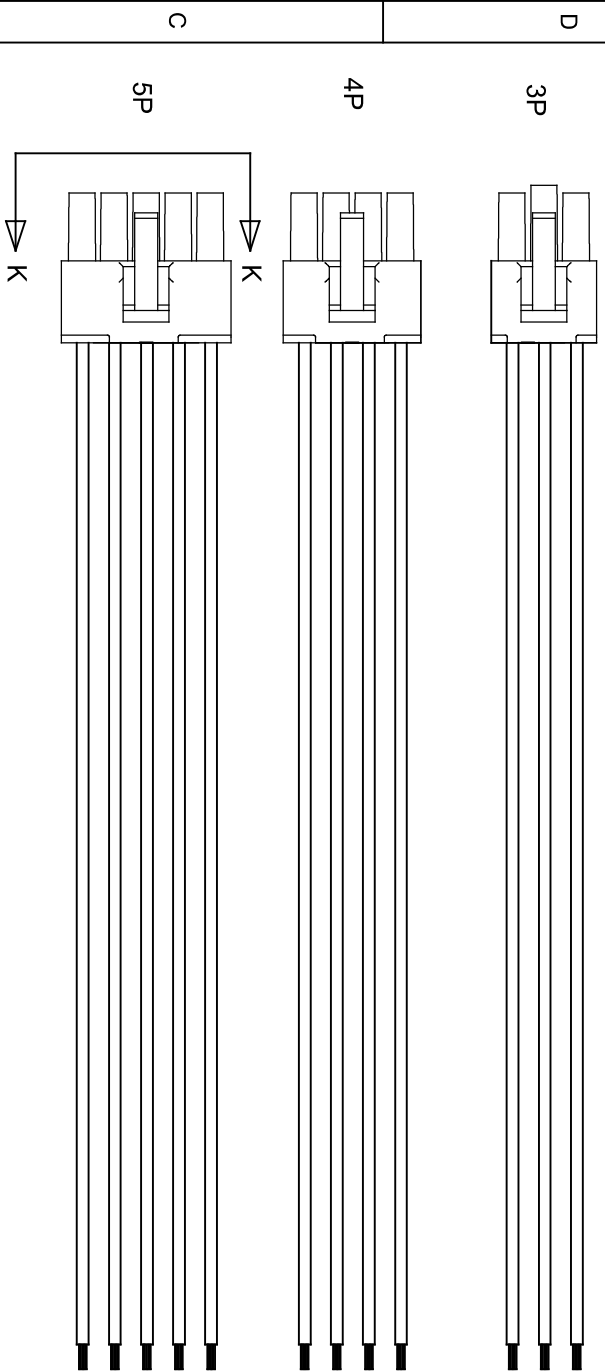

WIRE CHART:

SIDE A	WIRE	SIDE B	HOUSING P/N
WIRE 1	RED	OPEN	3P
WIRE 2	BLK/CR	OPEN	3P
WIRE 3	YELLOW	OPEN	3P
WIRE 4	BLUE	OPEN	3P

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.
- 3) 100% OPEN/SHORT TEST.

5P SHOWN
SCALE 1:1
VIEW:K/K

3	AR	M	UL1061 HOOK WIRE, 300V, 18AWG, Color See Table
2	AR	RCS	4.2mm PITCH EVALE TERMINAL, TIN PLATED, 18-25range, MOL EX39000038
1	RCS	4.2mm PITCH REC HSG, SMD ROW, XPP, MOL EX3940-40XX	
	S/N	QTY	UNIT
GENERAL TOLERANCE: 9 P.L.C. ± 127 2 P.L.C. ± 0.13 4 P.L.C. ± 0.002 ANGLES 3P			
	APPROVED:	PIN:	DESCRIPTION:
	R/W	SEE TABLE	
	CHECKED	DOCF#	TITLE: Molex 4.2mm Mini Fit Wire Harness
	CT	SD-CB020714	5557 Series, Single End, CSE-V02
	DRAWN	CUSTOMER COPY	SIZE UNIT SCALE PAGE REV
	MW		A4 MM N.T.S. 1 OF 1 A

CONBEONE
www.conbeone.com