
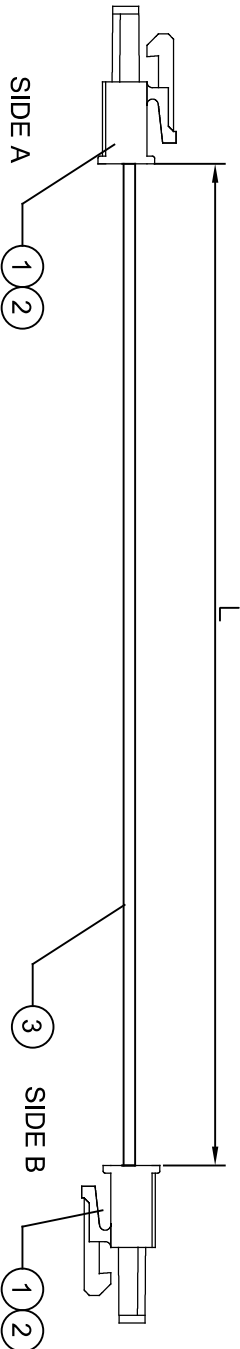


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/12/10

QTY'S	CONBEONE P/N	LMWD	TOLERANCE	HOUSING	UL CLASS
3P	CB020716-031	100	±6	39-01-4030	UL 94V-2
3P	CB020716-032	200	±6	39-01-4030	UL 94V-2
3P	CB020716-033	300	±8	39-01-4030	UL 94V-2
3P	CB020716-034	500	±10	39-01-4030	UL 94V-2
3P	CB020716-035	1000	±10	39-01-4030	UL 94V-2
3P	CB020716-036	150	±10	39-01-4030	UL 94V-2
3P	CB020716-037	700	±10	39-01-4030	UL 94V-2
3P	CB020716-131	100	±6	39-01-4031	UL 94V-0
3P	CB020716-132	200	±6	39-01-4031	UL 94V-0
3P	CB020716-133	300	±8	39-01-4031	UL 94V-0
3P	CB020716-134	500	±10	39-01-4031	UL 94V-0
3P	CB020716-135	1000	±10	39-01-4031	UL 94V-0
3P	CB020716-136	150	±10	39-01-4031	UL 94V-0
3P	CB020716-137	700	±10	39-01-4031	UL 94V-0
4P	CB020716-041	100	±6	39-01-4040	UL 94V-2
4P	CB020716-042	200	±6	39-01-4040	UL 94V-2
4P	CB020716-043	300	±8	39-01-4040	UL 94V-2
4P	CB020716-044	500	±10	39-01-4040	UL 94V-2
4P	CB020716-045	1000	±10	39-01-4040	UL 94V-2
4P	CB020716-046	150	±10	39-01-4040	UL 94V-2
4P	CB020716-047	700	±10	39-01-4040	UL 94V-2
4P	CB020716-141	100	±6	39-01-4041	UL 94V-0
4P	CB020716-142	200	±6	39-01-4041	UL 94V-0
4P	CB020716-143	300	±8	39-01-4041	UL 94V-0
4P	CB020716-144	500	±10	39-01-4041	UL 94V-0
4P	CB020716-145	1000	±10	39-01-4041	UL 94V-0
4P	CB020716-146	150	±10	39-01-4041	UL 94V-0
4P	CB020716-147	700	±10	39-01-4041	UL 94V-0
5P	CB020716-051	100	±6	39-01-4050	UL 94V-2
5P	CB020716-052	200	±6	39-01-4050	UL 94V-2
5P	CB020716-053	300	±8	39-01-4050	UL 94V-2
5P	CB020716-054	500	±10	39-01-4050	UL 94V-2
5P	CB020716-055	1000	±10	39-01-4050	UL 94V-2
5P	CB020716-056	150	±10	39-01-4050	UL 94V-2
5P	CB020716-057	700	±10	39-01-4050	UL 94V-2
5P	CB020716-151	100	±6	39-01-4051	UL 94V-0
5P	CB020716-152	200	±6	39-01-4051	UL 94V-0
5P	CB020716-153	300	±8	39-01-4051	UL 94V-0
5P	CB020716-154	500	±10	39-01-4051	UL 94V-0
5P	CB020716-155	1000	±10	39-01-4051	UL 94V-0
5P	CB020716-156	150	±10	39-01-4051	UL 94V-0
5P	CB020716-157	700	±10	39-01-4051	UL 94V-0

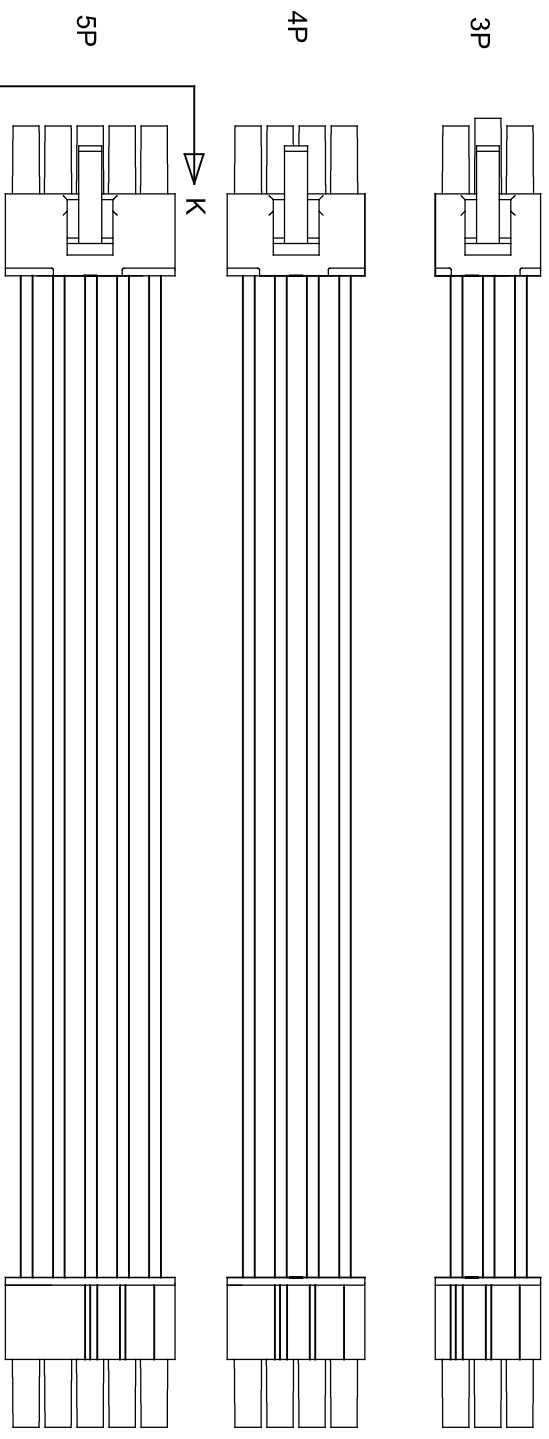


WIRE CHART:

SIDE A	WIRE	SIDE B	HOUSING PINS
RNS 2	BLACK	RNS 2	3P
RNS 1	YELLOW	RNS 3	4P
RNS 3	RED	RNS 4	5P

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.
- 3) 100% OPEN/SHORT TEST.

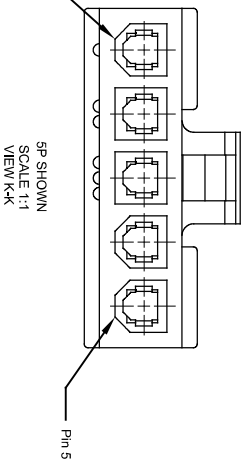

3	AR	M	UL1061 HOOK WIRE, 30°C, 300V, 18AWG, BLACK						
2	AR	RCS	4.2mm PITCH EVALE TERMINAL, TIN PLATED, 18-26range, MOL EX39000038						
1	RCS	4.2mm PITCH REC HSG, SINGLE ROW, XPP, MOL EX3901-40XX							
SN	QTY	UNIT	DESCRIPTION						
GENERAL TOLERANCE:			P/N:						
1 P.L.C ± 1.27			SEE TABLE						
2 P.L.C ± 0.13			DOCF# SD-CB020716						
3 P.L.C ± 0.03			TITLE: Molex 4.2mm Mini Fit Wire Harness						
4 P.L.C ± 0.02			5557 Series, Dual Ends Type B, CDBV02						
ANGLES 3P			DRAWN MW						
UNLESS SPECIFIED:			CUSTOMER COPY						
THE DRAWINGS IS CONTROLLED DOCUMENTATION			SIZE UNIT SCALE PAGE REV						
IS SUBJECT TO CHANGE AND THE SUPPLIER ENGINEERING			A4 MM N.T.S 1 OF 1 A						
CONTINUED FOR LATEST VERSION.			www.conbeone.com						
			<b>CONBEONE</b>						