


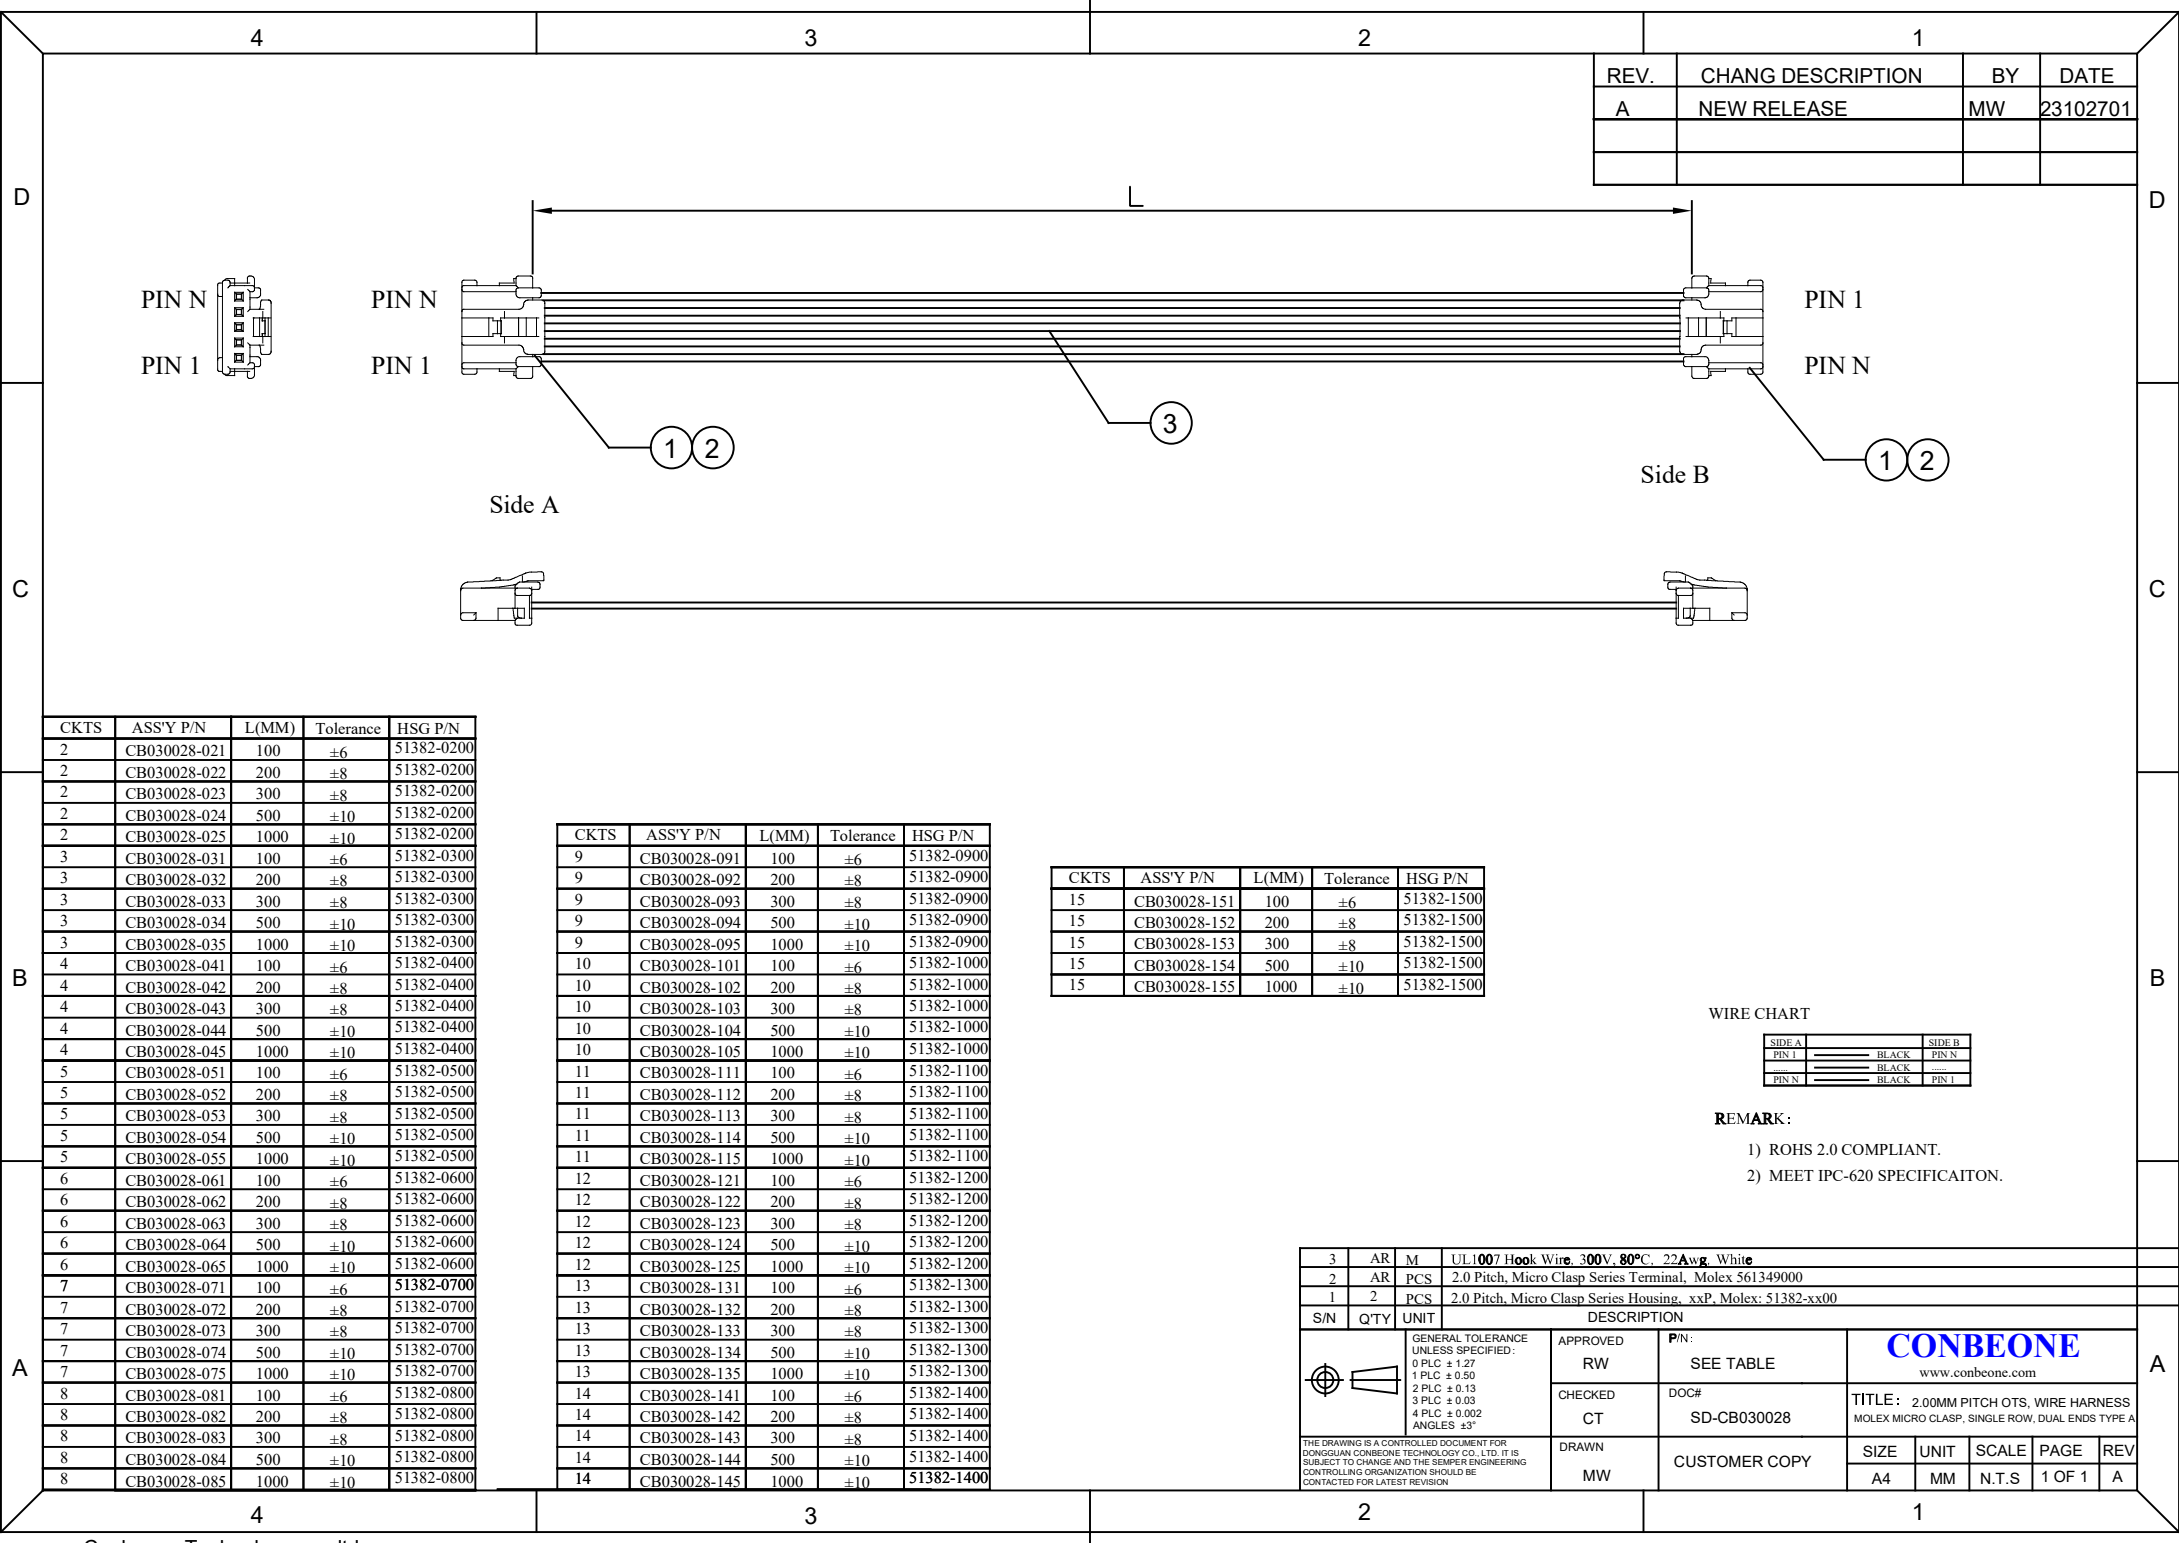

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	23102701

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
2	CB030028-021	100	±6	51382-0200
2	CB030028-022	200	±8	51382-0200
2	CB030028-023	300	±8	51382-0200
2	CB030028-024	500	±10	51382-0200
2	CB030028-025	1000	±10	51382-0200
3	CB030028-031	100	±6	51382-0300
3	CB030028-032	200	±8	51382-0300
3	CB030028-033	300	±8	51382-0300
3	CB030028-034	500	±10	51382-0300
3	CB030028-035	1000	±10	51382-0300
4	CB030028-041	100	±6	51382-0400
4	CB030028-042	200	±8	51382-0400
4	CB030028-043	300	±8	51382-0400
4	CB030028-044	500	±10	51382-0400
4	CB030028-045	1000	±10	51382-0400
5	CB030028-051	100	±6	51382-0500
5	CB030028-052	200	±8	51382-0500
5	CB030028-053	300	±8	51382-0500
5	CB030028-054	500	±10	51382-0500
5	CB030028-055	1000	±10	51382-0500
6	CB030028-061	100	±6	51382-0600
6	CB030028-062	200	±8	51382-0600
6	CB030028-063	300	±8	51382-0600
6	CB030028-064	500	±10	51382-0600
6	CB030028-065	1000	±10	51382-0600
7	CB030028-071	100	±6	51382-0700
7	CB030028-072	200	±8	51382-0700
7	CB030028-073	300	±8	51382-0700
7	CB030028-074	500	±10	51382-0700
7	CB030028-075	1000	±10	51382-0700
8	CB030028-081	100	±6	51382-0800
8	CB030028-082	200	±8	51382-0800
8	CB030028-083	300	±8	51382-0800
8	CB030028-084	500	±10	51382-0800
8	CB030028-085	1000	±10	51382-0800

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
9	CB030028-091	100	±6	51382-0900
9	CB030028-092	200	±8	51382-0900
9	CB030028-093	300	±8	51382-0900
9	CB030028-094	500	±10	51382-0900
9	CB030028-095	1000	±10	51382-0900
10	CB030028-101	100	±6	51382-1000
10	CB030028-102	200	±8	51382-1000
10	CB030028-103	300	±8	51382-1000
10	CB030028-104	500	±10	51382-1000
10	CB030028-105	1000	±10	51382-1000
11	CB030028-111	100	±6	51382-1100
11	CB030028-112	200	±8	51382-1100
11	CB030028-113	300	±8	51382-1100
11	CB030028-114	500	±10	51382-1100
11	CB030028-115	1000	±10	51382-1100
12	CB030028-121	100	±6	51382-1200
12	CB030028-122	200	±8	51382-1200
12	CB030028-123	300	±8	51382-1200
12	CB030028-124	500	±10	51382-1200
12	CB030028-125	1000	±10	51382-1200
13	CB030028-131	100	±6	51382-1300
13	CB030028-132	200	±8	51382-1300
13	CB030028-133	300	±8	51382-1300
13	CB030028-134	500	±10	51382-1300
13	CB030028-135	1000	±10	51382-1300
14	CB030028-141	100	±6	51382-1400
14	CB030028-142	200	±8	51382-1400
14	CB030028-143	300	±8	51382-1400
14	CB030028-144	500	±10	51382-1400
14	CB030028-145	1000	±10	51382-1400

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
15	CB030028-151	100	±6	51382-1500
15	CB030028-152	200	±8	51382-1500
15	CB030028-153	300	±8	51382-1500
15	CB030028-154	500	±10	51382-1500
15	CB030028-155	1000	±10	51382-1500

WIRE CHART

SIDE A	---	SIDE B
PIN 1	---	PIN N
---	---	---
PIN N	---	PIN 1

- REMARK:
- 1) ROHS 2.0 COMPLIANT.
 - 2) MEET IPC-620 SPECIFICAITON.

3	AR	M	UL1007 Hook Wire, 300V, 80°C, 22Awg, White						
2	AR	PCS	2.0 Pitch, Micro Clasp Series Terminal, Molex 561349000						
1	2	PCS	2.0 Pitch, Micro Clasp Series Housing, xxP, Molex: 51382-xx00						
S/N	Q'TY	UNIT	DESCRIPTION						
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED RW	PIN: SEE TABLE	CONBEONE www.conbeone.com				
			CHECKED CT	DOC# SD-CB030028					
	THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.		DRAWN MW	CUSTOMER COPY	SIZE A4	UNIT MM	SCALE N.T.S	PAGE 1 OF 1	REV A
			TITLE: 2.00MM PITCH OTS, WIRE HARNESS MOLEX MICRO CLASP, SINGLE ROW, DUAL ENDS TYPE A						