


4

3


2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/12/27

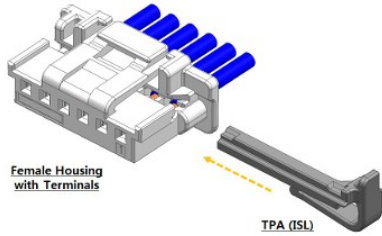

5601230600 SHOWN



PIN 4 PIN 1

VIEW K-K
SCALE 2:1

PIN N

PIN 1

SIDE A

SIDE B

K
K

L

5

Stripped

1 2 3

4

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	PIN 1	560123-0200
PIN 2	Black	PIN 2	560123-0300
PIN 3	Black	PIN 3	560123-0400
PIN 4	Black	PIN 4	560123-0500
PIN 5	Black	PIN 5	560123-0600
PIN 6	Black	PIN 6	560123-0700
PIN 7	Black	PIN 7	560123-0800
PIN 8	Black	PIN 8	560123-0900
PIN 9	Black	PIN 9	560123-1000
PIN 10	Black	PIN 10	560123-1100
PIN 11	Black	PIN 11	560123-1200
PIN 12	Black	PIN 12	560123-1200

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

4	AR	M	UL3132 SILLICON RUBBER WIRE, -60~125°C, 300V, 22AWG, BLACK		
3	N	PCS	2.00mm PITCH DURAClick ISL FEMALE TERMINAL, MOLEX 5601240101		
2	I	PCS	2.00mm PITCH DURAClick ISL RETAINER, MOLEX 560125XXXX		
1	I	PCS	2.00mm PITCH DURAClick ISL FEMALE HSG, MOLEX 560123XXXX		
S/N	Q'TY	UNIT	DESCRIPTION		
			APPROVED	P/N:	
			RW	SEE TABLE	
			CHECKED	DOCN#	
			CT	SD-CB030504	
			DRAWN	CUSTOMER COPY	
			MW		
			GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		CONBEONE www.conbeone.com
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			TITLE: MOLEX 2.00MM PITCH OTS DURAClick ISL, 560123, SINGLE END		A
			SIZE	UNIT	SCALE
			A4	MM	N.T.S
			PAGE	1 OF 1	REV
					A

4

3

2

1