



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250626

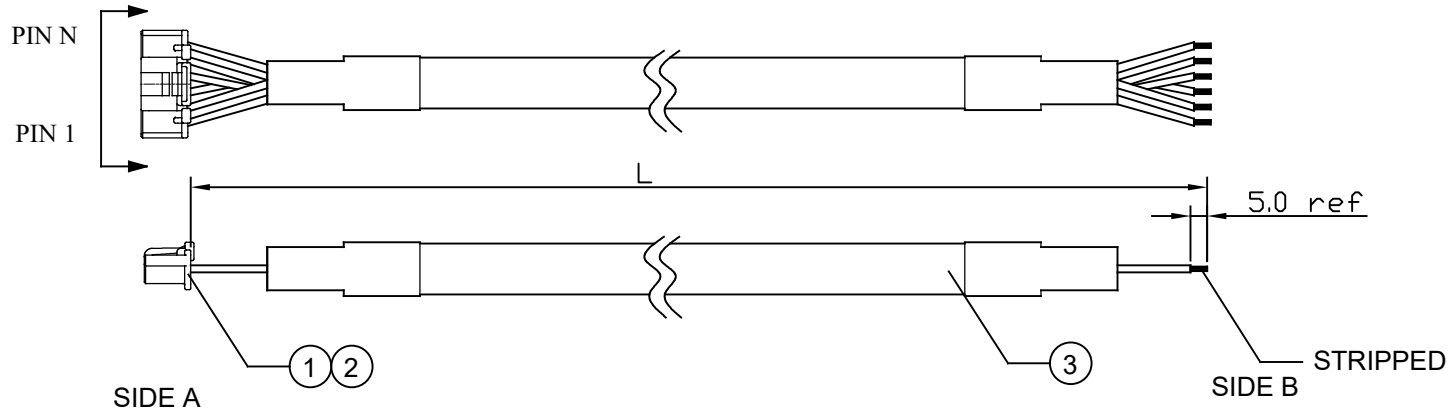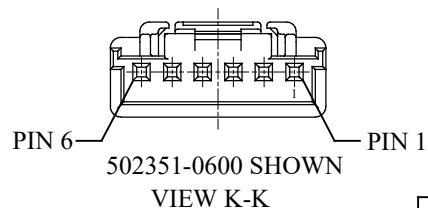

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
2	CB030543-021	100	±6	502351-0200	8	CB030543-081	100	±6	502351-0800
2	CB030543-022	200	±8	502351-0200	8	CB030543-082	200	±8	502351-0800
2	CB030543-023	300	±8	502351-0200	8	CB030543-083	300	±8	502351-0800
2	CB030543-024	500	±10	502351-0200	8	CB030543-084	500	±10	502351-0800
2	CB030543-025	1000	±10	502351-0200	8	CB030543-085	1000	±10	502351-0800
2	CB030543-026	150	±6	502351-0200	8	CB030543-086	150	±6	502351-0800
3	CB030543-031	100	±6	502351-0300	9	CB030543-091	100	±6	502351-0900
3	CB030543-032	200	±8	502351-0300	9	CB030543-092	200	±8	502351-0900
3	CB030543-033	300	±8	502351-0300	9	CB030543-093	300	±8	502351-0900
3	CB030543-034	500	±10	502351-0300	9	CB030543-094	500	±10	502351-0900
3	CB030543-035	1000	±10	502351-0300	9	CB030543-095	1000	±10	502351-0900
3	CB030543-036	150	±6	502351-0300	9	CB030543-096	150	±6	502351-0900
4	CB030543-041	100	±6	502351-0400	10	CB030543-101	100	±6	502351-1000
4	CB030543-042	200	±8	502351-0400	10	CB030543-102	200	±8	502351-1000
4	CB030543-043	300	±8	502351-0400	10	CB030543-103	300	±8	502351-1000
4	CB030543-044	500	±10	502351-0400	10	CB030543-104	500	±10	502351-1000
4	CB030543-045	1000	±10	502351-0400	10	CB030543-105	1000	±10	502351-1000
4	CB030543-046	150	±6	502351-0400	10	CB030543-106	150	±6	502351-1000
5	CB030543-051	100	±6	502351-0500					
5	CB030543-052	200	±8	502351-0500					
5	CB030543-053	300	±8	502351-0500					
5	CB030543-054	500	±10	502351-0500					
5	CB030543-055	1000	±10	502351-0500					
5	CB030543-056	150	±6	502351-0500					
6	CB030543-061	100	±6	502351-0600					
6	CB030543-062	200	±8	502351-0600					
6	CB030543-063	300	±8	502351-0600					
6	CB030543-064	500	±10	502351-0600					
6	CB030543-065	1000	±10	502351-0600					
6	CB030543-066	150	±6	502351-0600					
7	CB030543-071	100	±6	502351-0700					
7	CB030543-072	200	±8	502351-0700					
7	CB030543-073	300	±8	502351-0700					
7	CB030543-074	500	±10	502351-0700					
7	CB030543-075	1000	±10	502351-0700					
7	CB030543-076	150	±6	502351-0700					

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	stripped	
PIN 2	Black	stripped	502351-0200
PIN 3	Yellow	stripped	502351-0300
PIN 4	Green	stripped	502351-0400
PIN 5	Blue	stripped	502351-0500
PIN 6	White	stripped	502351-0600
PIN 7	Orange	stripped	502351-0700
PIN 8	Gray	stripped	502351-0800
PIN 9	Purple	stripped	502351-0900
PIN 10	Brown	stripped	502351-1000

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

4	AR	M	UL1061 HOOK WIRE, 80°C, 300V,COLOR SEE TABLE, 22AWG								
3	AR	M	UL1061 HOOK WIRE, 80°C, 300V,COLOR SEE TABLE, 22AWG								
2	N	PCS	2.00mm PITCH DURAClick FEMALE TERMINAL, MOLEX 560085-0101								
1	I	PCS	2.00mm PITCH DURAClick FEMALE HSG. NP, MOLEX 502351-XX00								
S/N	Q'TY	UNIT	DESCRIPTION								
			GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED RW SEE TABLE CHECKED CT DOC# SD-CB030543	CONBEONE www.conbeone.com TITLE : 2.00MM PITCH OTS, WIRE HARNESS MOLEX DURAClick , SINGLE END, TYPE CSEP					
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN		SIZE	UNIT	SCALE	PAGE	REV		
			MW		CUSTOMER COPY		A4	MM	N.T.S	1 OF 1	A

4

3

2

1