


4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250710

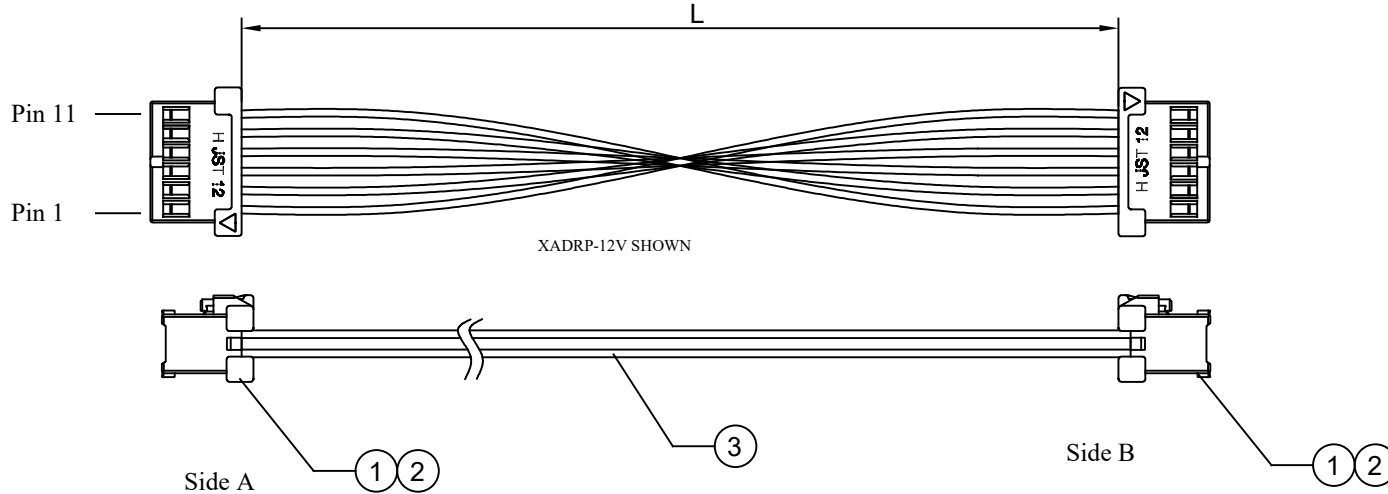

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	— BLACK	PIN 1	
PIN 3	— BLACK	PIN 3	
PIN 3	— BLACK	PIN 3	
PIN 4	— BLACK	PIN 4	
PIN 5	— BLACK	PIN 5	
PIN 6	— BLACK	PIN 6	
PIN 7	— BLACK	PIN 7	
PIN 8	— BLACK	PIN 8	XADRP-08V
PIN 9	— BLACK	PIN 9	
PIN 10	— BLACK	PIN 10	XADRP-10V
PIN 11	— BLACK	PIN 11	
PIN 12	— BLACK	PIN 12	XADRP-12V
PIN 13	— BLACK	PIN 13	
PIN 14	— BLACK	PIN 14	XADRP-14V
PIN 15	— BLACK	PIN 15	
PIN 16	— BLACK	PIN 16	XADRP-16V
PIN 17	— BLACK	PIN 17	
PIN 18	— BLACK	PIN 18	XADRP-18V
PIN 19	— BLACK	PIN 19	
PIN 30	— BLACK	PIN 30	XADRP-20V
PIN 31	— BLACK	PIN 31	
PIN 32	— BLACK	PIN 32	XADRP-22V
PIN 33	— BLACK	PIN 33	
PIN 34	— BLACK	PIN 34	XADRP-24V
PIN 35	— BLACK	PIN 35	
PIN 36	— BLACK	PIN 36	XADRP-26V
PIN 37	— BLACK	PIN 37	
PIN 38	— BLACK	PIN 38	XADRP-28V
PIN 39	— BLACK	PIN 39	
PIN 30	— BLACK	PIN 30	XADRP-30V
PIN 31	— BLACK	PIN 31	
PIN 32	— BLACK	PIN 32	XADRP-32V
PIN 33	— BLACK	PIN 33	
PIN 34	— BLACK	PIN 34	XADRP-34V
PIN 35	— BLACK	PIN 35	
PIN 36	— BLACK	PIN 36	XADRP-36V
PIN 37	— BLACK	PIN 37	
PIN 38	— BLACK	PIN 38	
PIN 39	— BLACK	PIN 39	
PIN 40	— BLACK	PIN 40	XADRP-40V

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
8	CB030547-081	100	±6	XADRP-08V
8	CB030547-082	200	±8	XADRP-08V
8	CB030547-083	300	±8	XADRP-08V
8	CB030547-084	500	±10	XADRP-08V
8	CB030547-085	1000	±10	XADRP-08V
8	CB030547-086	150	±6	XADRP-08V
10	CB030547-101	100	±6	XADRP-10V
10	CB030547-102	200	±8	XADRP-10V
10	CB030547-103	300	±8	XADRP-10V
10	CB030547-104	500	±10	XADRP-10V
10	CB030547-105	1000	±10	XADRP-10V
10	CB030547-106	150	±6	XADRP-10V
12	CB030547-121	100	±6	XADRP-12V
12	CB030547-122	200	±8	XADRP-12V
12	CB030547-123	300	±8	XADRP-12V
12	CB030547-124	500	±10	XADRP-12V
12	CB030547-125	1000	±10	XADRP-12V
12	CB030547-126	150	±6	XADRP-12V
14	CB030547-141	100	±6	XADRP-14V
14	CB030547-142	200	±8	XADRP-14V
14	CB030547-143	300	±8	XADRP-14V
14	CB030547-144	500	±10	XADRP-14V
14	CB030547-145	1000	±10	XADRP-14V
14	CB030547-146	150	±6	XADRP-14V
16	CB030547-161	100	±6	XADRP-16V
16	CB030547-162	200	±8	XADRP-16V
16	CB030547-163	300	±8	XADRP-16V
16	CB030547-164	500	±10	XADRP-16V
16	CB030547-165	1000	±10	XADRP-16V
16	CB030547-166	150	±6	XADRP-16V
18	CB030547-181	100	±6	XADRP-18V
18	CB030547-182	200	±8	XADRP-18V
18	CB030547-183	300	±8	XADRP-18V
18	CB030547-184	500	±10	XADRP-18V
18	CB030547-185	1000	±10	XADRP-18V
18	CB030547-186	150	±6	XADRP-18V

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
20	CB030547-201	100	±6	XADRP-20V
20	CB030547-202	200	±8	XADRP-20V
20	CB030547-203	300	±8	XADRP-20V
20	CB030547-204	500	±10	XADRP-20V
20	CB030547-205	1000	±10	XADRP-20V
20	CB030547-206	150	±6	XADRP-20V
22	CB030547-221	100	±6	XADRP-22V
22	CB030547-222	200	±8	XADRP-22V
22	CB030547-223	300	±8	XADRP-22V
22	CB030547-224	500	±10	XADRP-22V
22	CB030547-225	1000	±10	XADRP-22V
22	CB030547-226	150	±6	XADRP-22V
24	CB030547-241	100	±6	XADRP-24V
24	CB030547-242	200	±8	XADRP-24V
24	CB030547-243	300	±8	XADRP-24V
24	CB030547-244	500	±10	XADRP-24V
24	CB030547-245	1000	±10	XADRP-24V
24	CB030547-246	150	±6	XADRP-24V
26	CB030547-261	100	±6	XADRP-26V
26	CB030547-262	200	±8	XADRP-26V
26	CB030547-263	300	±8	XADRP-26V
26	CB030547-264	500	±10	XADRP-26V
26	CB030547-265	1000	±10	XADRP-26V
26	CB030547-266	150	±6	XADRP-26V
28	CB030547-281	100	±6	XADRP-28V
28	CB030547-282	200	±8	XADRP-28V
28	CB030547-283	300	±8	XADRP-28V
28	CB030547-284	500	±10	XADRP-28V
28	CB030547-285	1000	±10	XADRP-28V
28	CB030547-286	150	±6	XADRP-28V
30	CB030547-301	100	±6	XADRP-30V
30	CB030547-302	200	±8	XADRP-30V
30	CB030547-303	300	±8	XADRP-30V
30	CB030547-304	500	±10	XADRP-30V
30	CB030547-305	1000	±10	XADRP-30V
30	CB030547-306	150	±6	XADRP-30V

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
32	CB030547-321	100	±6	XADRP-32V
32	CB030547-322	200	±8	XADRP-32V
32	CB030547-323	300	±8	XADRP-32V
32	CB030547-324	500	±10	XADRP-32V
32	CB030547-325	1000	±10	XADRP-32V
32	CB030547-326	150	±6	XADRP-32V
34	CB030547-341	100	±6	XADRP-34V
34	CB030547-342	200	±8	XADRP-34V
34	CB030547-343	300	±8	XADRP-34V
34	CB030547-344	500	±10	XADRP-34V
34	CB030547-345	1000	±10	XADRP-34V
34	CB030547-346	150	±6	XADRP-34V
36	CB030547-361	100	±6	XADRP-36V
36	CB030547-362	200	±8	XADRP-36V
36	CB030547-363	300	±8	XADRP-36V
36	CB030547-364	500	±10	XADRP-36V
36	CB030547-365	1000	±10	XADRP-36V
26	CB030547-366	150	±6	XADRP-36V
40	CB030547-401	100	±6	XADRP-40V
40	CB030547-402	200	±8	XADRP-40V
40	CB030547-403	300	±8	XADRP-40V
40	CB030547-404	500	±10	XADRP-40V
40	CB030547-405	1000	±10	XADRP-40V
40	CB030547-406	150	±6	XADRP-40V

3	AR	M	UL1061 Hook Wire, 300V, 80°C, 22Awg, Color See Table					
2	AR	PCS	2.5 Pitch, XA Family Terminal, JST: SXA-001T-P0.6					
1	1	PCS	2.5 Pitch, XAD Family Housing, xxP, JST: XADRP-xxV					
S/N	Q'TY	UNIT	DESCRIPTION					
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com			
			RW	SEE TABLE				
			CHECKED	DOC#	TITLE: 2.50MM PITCH OTS, WIRE HARNESS JST XAD SERIES, DUAL ENDS, TYPE DBDE			
			CT	SD-CB030547				
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION			DRAWN	CUSTOMER COPY				
			MW				SIZE	UNIT
				A4	MM	N.T.S	1 OF 1	A

4

3

2

1