


4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250710

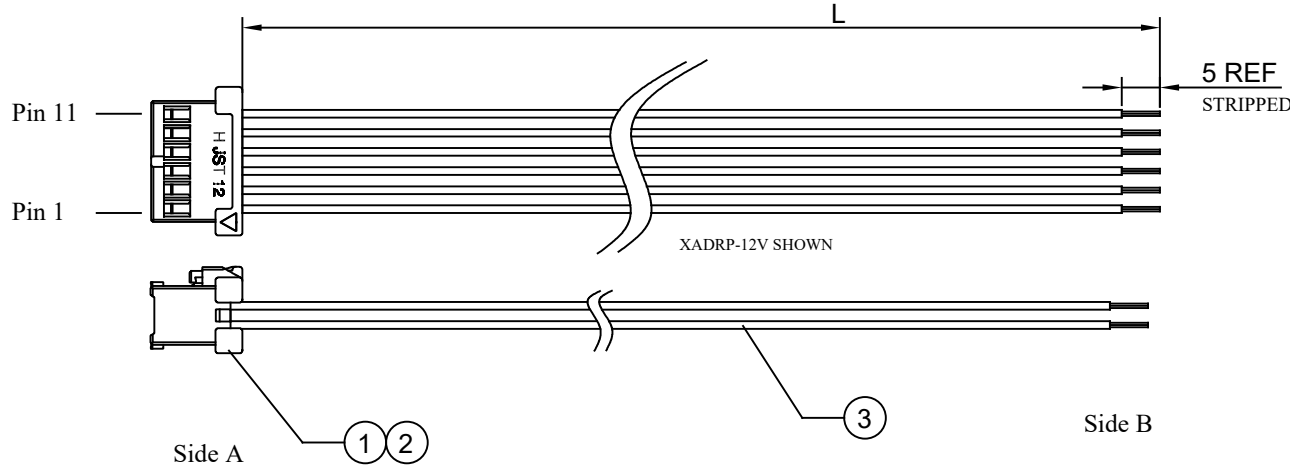

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	RED	OPEN	XADRP-08V
PIN 3	BLACK	OPEN	
PIN 3	YELLOW	OPEN	
PIN 4	GREEN	OPEN	
PIN 5	BLUE	OPEN	XADRP-10V
PIN 6	WHITE	OPEN	
PIN 7	ORANGE	OPEN	XADRP-12V
PIN 8	GRAY	OPEN	
PIN 9	PURPLE	OPEN	XADRP-14V
PIN 10	BROWN	OPEN	
PIN 11	RED	OPEN	XADRP-16V
PIN 12	BLACK	OPEN	
PIN 13	YELLOW	OPEN	XADRP-18V
PIN 14	GREEN	OPEN	
PIN 15	BLUE	OPEN	XADRP-20V
PIN 16	WHITE	OPEN	
PIN 17	ORANGE	OPEN	XADRP-22V
PIN 18	GRAY	OPEN	
PIN 19	PURPLE	OPEN	XADRP-24V
PIN 30	BROWN	OPEN	
PIN 31	RED	OPEN	XADRP-26V
PIN 32	BLACK	OPEN	
PIN 33	YELLOW	OPEN	XADRP-28V
PIN 34	GREEN	OPEN	
PIN 35	BLUE	OPEN	XADRP-30V
PIN 36	WHITE	OPEN	
PIN 37	ORANGE	OPEN	XADRP-32V
PIN 38	GRAY	OPEN	
PIN 39	PURPLE	OPEN	XADRP-34V
PIN 30	BROWN	OPEN	
PIN 31	RED	OPEN	XADRP-36V
PIN 32	BLACK	OPEN	
PIN 33	YELLOW	OPEN	XADRP-40V
PIN 34	GREEN	OPEN	
PIN 35	BLUE	OPEN	
PIN 36	WHITE	OPEN	
PIN 37	ORANGE	OPEN	
PIN 38	GRAY	OPEN	
PIN 39	PURPLE	OPEN	
PIN 40	BROWN	OPEN	

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 Hook Wire, 300V, 80°C, 22Awg, Color See Table				
2	AR	PCS	2.5 Pitch, XA Family Terminal, JST: SXA-001T-P0.6				
1	1	PCS	2.5 Pitch, XAD Family Housing, xxP, JST: XADRP-xxV				
S/N	QTY	UNIT	DESCRIPTION				
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	P/N:	CONBEONE www.conbeone.com		
			RW	SEE TABLE			
			CHECKED	DOC#	TITLE: 2.50MM PITCH OTS, WIRE HARNESS JST XAD SERIES, SINGLE END, TYPE DCSE		
			CT	SD-CB030548			
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN				
			MW	CUSTOMER COPY			
			SIZE	UNIT	SCALE	PAGE	REV
			A4	MM	N.T.S	1 OF 1	A

4

3

2

1