



REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250829



51065-0600 SHOWN
VIEW K-K

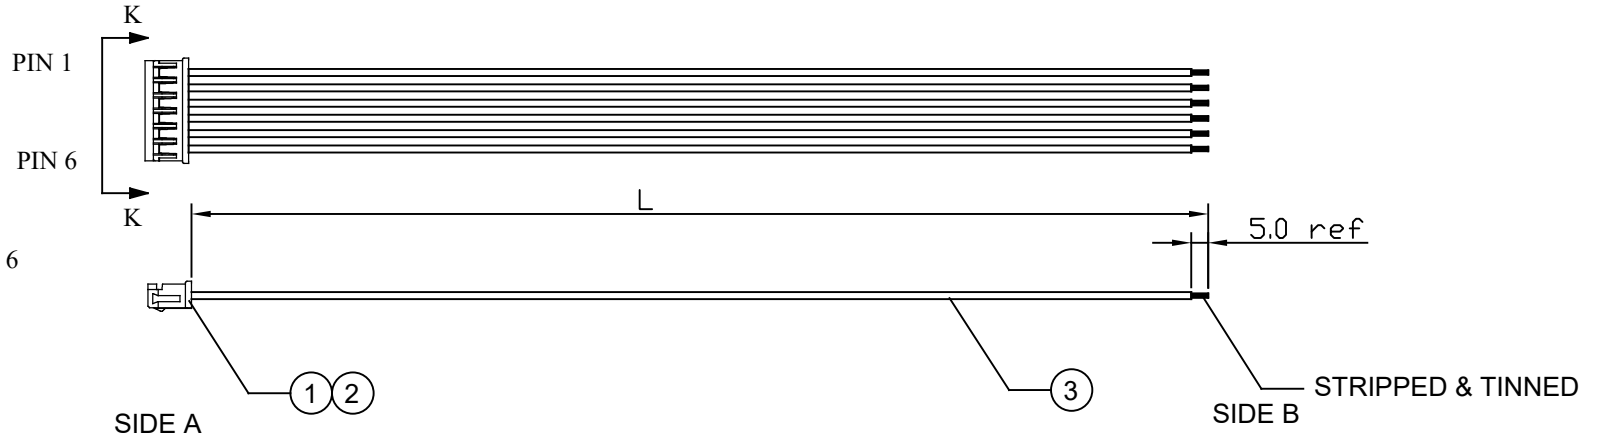

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
2	CB030560-021	100	±6	51065-0200	8	CB030560-081	100	±6	51065-0800	13	CB030560-131	100	±6	51065-1300
2	CB030560-022	200	±8	51065-0200	8	CB030560-082	200	±8	51065-0800	13	CB030560-132	200	±8	51065-1300
2	CB030560-023	300	±8	51065-0200	8	CB030560-083	300	±8	51065-0800	13	CB030560-133	300	±8	51065-1300
2	CB030560-024	500	±10	51065-0200	8	CB030560-084	500	±10	51065-0800	13	CB030560-134	500	±10	51065-1300
2	CB030560-025	1000	±10	51065-0200	8	CB030560-085	1000	±10	51065-0800	13	CB030560-135	1000	±10	51065-1300
2	CB030560-026	150	±6	51065-0200	8	CB030560-086	150	±6	51065-0800	13	CB030560-136	150	±6	51065-1300
3	CB030560-031	100	±6	51065-0300	9	CB030560-091	100	±6	51065-0900	14	CB030560-141	100	±6	51065-1400
3	CB030560-032	200	±8	51065-0300	9	CB030560-092	200	±8	51065-0900	14	CB030560-142	200	±8	51065-1400
3	CB030560-033	300	±8	51065-0300	9	CB030560-093	300	±8	51065-0900	14	CB030560-143	300	±8	51065-1400
3	CB030560-034	500	±10	51065-0300	9	CB030560-094	500	±10	51065-0900	14	CB030560-144	500	±10	51065-1400
3	CB030560-035	1000	±10	51065-0300	9	CB030560-095	1000	±10	51065-0900	14	CB030560-145	1000	±10	51065-1400
3	CB030560-036	150	±6	51065-0300	9	CB030560-096	150	±6	51065-0900	14	CB030560-146	150	±6	51065-1400
4	CB030560-041	100	±6	51065-0400	10	CB030560-101	100	±6	51065-1000	15	CB030560-151	100	±6	51065-1500
4	CB030560-042	200	±8	51065-0400	10	CB030560-102	200	±8	51065-1000	15	CB030560-152	200	±8	51065-1500
4	CB030560-043	300	±8	51065-0400	10	CB030560-103	300	±8	51065-1000	15	CB030560-153	300	±8	51065-1500
4	CB030560-044	500	±10	51065-0400	10	CB030560-104	500	±10	51065-1000	15	CB030560-154	500	±10	51065-1500
4	CB030560-045	1000	±10	51065-0400	10	CB030560-105	1000	±10	51065-1000	15	CB030560-155	1000	±10	51065-1500
4	CB030560-046	150	±6	51065-0400	10	CB030560-106	150	±6	51065-1000	15	CB030560-156	150	±6	51065-1500
5	CB030560-051	100	±6	51065-0500	11	CB030560-111	100	±6	51065-1100					
5	CB030560-052	200	±8	51065-0500	11	CB030560-112	200	±8	51065-1100					
5	CB030560-053	300	±8	51065-0500	11	CB030560-113	300	±8	51065-1100					
5	CB030560-054	500	±10	51065-0500	11	CB030560-114	500	±10	51065-1100					
5	CB030560-055	1000	±10	51065-0500	11	CB030560-115	1000	±10	51065-1100					
5	CB030560-056	150	±6	51065-0500	11	CB030560-116	150	±6	51065-1100					
6	CB030560-061	100	±6	51065-0600	12	CB030560-121	100	±6	51065-1200					
6	CB030560-062	200	±8	51065-0600	12	CB030560-122	200	±8	51065-1200					
6	CB030560-063	300	±8	51065-0600	12	CB030560-123	300	±8	51065-1200					
6	CB030560-064	500	±10	51065-0600	12	CB030560-124	500	±10	51065-1200					
6	CB030560-065	1000	±10	51065-0600	12	CB030560-125	1000	±10	51065-1200					
6	CB030560-066	150	±6	51065-0600	12	CB030560-126	150	±6	51065-1200					
7	CB030560-071	100	±6	51065-0700										
7	CB030560-072	200	±8	51065-0700										
7	CB030560-073	300	±8	51065-0700										
7	CB030560-074	500	±10	51065-0700										
7	CB030560-075	1000	±10	51065-0700										
7	CB030560-076	150	±6	51065-0700										

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	stripped	
PIN 2	Black	stripped	51065-0200
PIN 3	Yellow	stripped	51065-0300
PIN 4	Green	stripped	51065-0400
PIN 5	Blue	stripped	51065-0500
PIN 6	White	stripped	51065-0600
PIN 7	Orange	stripped	51065-0700
PIN 8	Gray	stripped	51065-0800
PIN 9	Purple	stripped	51065-0900
PIN 10	Brown	stripped	51065-1000
PIN 11	Red	stripped	51065-1100
PIN 12	Black	stripped	51065-1200
PIN 13	Yellow	stripped	51065-1300
PIN 14	Green	stripped	51065-1400
PIN 15	Blue	stripped	51065-1500

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, COLOR SEE TABLE, 24AWG
2	N	PCS	2.00mm PITCH MICRO LATCH FEMALE TERMINAL, MOLEX 50212-8000
1	I	PCS	2.00mm PITCH MICRO LATCH FEMALE HSG, XXP, MOLEX 51065-XX00
S/N	Q'TY	UNIT	DESCRIPTION
			GENERAL TOLERANCE UNLESS SPECIFIED: 1 PLC ± 1.27 2 PLC ± 0.50 3 PLC ± 0.13 4 PLC ± 0.03 ANGLES ± 3°
			APPROVED RW SEE TABLE
			CHECKED CT DOCF
			DRAWN MW CUSTOMER COPY
			CONBEONE www.conbeone.com
			TITLE: 2.00MM PITCH OTS, WIRE HARNESS MOLEX MICRO LATCH, SINGLE END, TYPE CSE
			SIZE A4
			UNIT MM
			SCALE N.T.S
			PAGE 1 OF 1
			REV A

THE DRAWING IS A CONTROLLED DOCUMENT FOR
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING
CONTROLLING ORGANIZATION SHOULD BE
CONTACTED FOR LATEST REVISION