REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250829

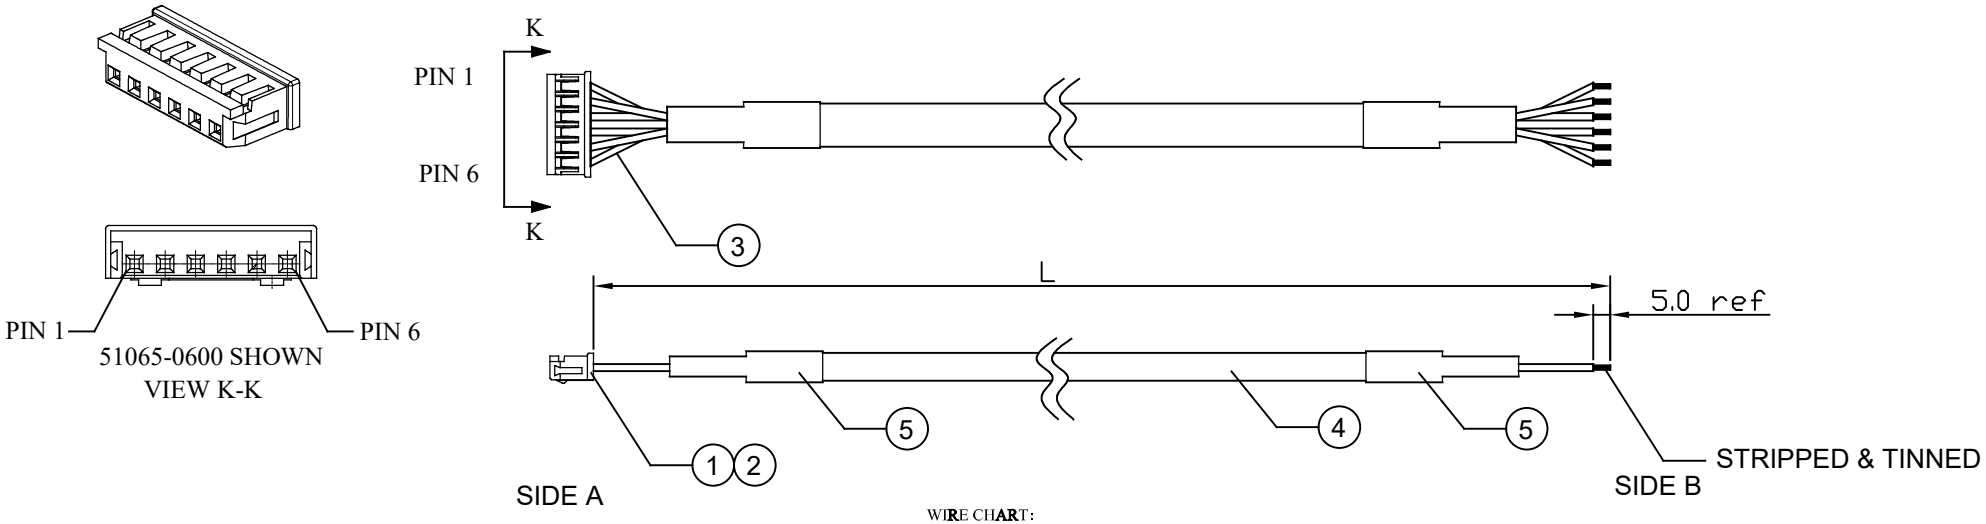

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
2	CB030563-021	100	±6	51065-0200	8	CB030563-081	100	±6	51065-0800
2	CB030563-022	200	±8	51065-0200	8	CB030563-082	200	±8	51065-0800
2	CB030563-023	300	±8	51065-0200	8	CB030563-083	300	±8	51065-0800
2	CB030563-024	500	±10	51065-0200	8	CB030563-084	500	±10	51065-0800
2	CB030563-025	1000	±10	51065-0200	8	CB030563-085	1000	±10	51065-0800
2	CB030563-026	150	±6	51065-0200	8	CB030563-086	150	±6	51065-0800
3	CB030563-031	100	±6	51065-0300	9	CB030563-091	100	±6	51065-0900
3	CB030563-032	200	±8	51065-0300	9	CB030563-092	200	±8	51065-0900
3	CB030563-033	300	±8	51065-0300	9	CB030563-093	300	±8	51065-0900
3	CB030563-034	500	±10	51065-0300	9	CB030563-094	500	±10	51065-0900
3	CB030563-035	1000	±10	51065-0300	9	CB030563-095	1000	±10	51065-0900
3	CB030563-036	150	±6	51065-0300	9	CB030563-096	150	±6	51065-0900
4	CB030563-041	100	±6	51065-0400	10	CB030563-101	100	±6	51065-1000
4	CB030563-042	200	±8	51065-0400	10	CB030563-102	200	±8	51065-1000
4	CB030563-043	300	±8	51065-0400	10	CB030563-103	300	±8	51065-1000
4	CB030563-044	500	±10	51065-0400	10	CB030563-104	500	±10	51065-1000
4	CB030563-045	1000	±10	51065-0400	10	CB030563-105	1000	±10	51065-1000
4	CB030563-046	150	±6	51065-0400	10	CB030563-106	150	±6	51065-1000
5	CB030563-051	100	±6	51065-0500					
5	CB030563-052	200	±8	51065-0500					
5	CB030563-053	300	±8	51065-0500					
5	CB030563-054	500	±10	51065-0500					
5	CB030563-055	1000	±10	51065-0500					
5	CB030563-056	150	±6	51065-0500					
6	CB030563-061	100	±6	51065-0600					
6	CB030563-062	200	±8	51065-0600					
6	CB030563-063	300	±8	51065-0600					
6	CB030563-064	500	±10	51065-0600					
6	CB030563-065	1000	±10	51065-0600					
6	CB030563-066	150	±6	51065-0600					
7	CB030563-071	100	±6	51065-0700					
7	CB030563-072	200	±8	51065-0700					
7	CB030563-073	300	±8	51065-0700					
7	CB030563-074	500	±10	51065-0700					
7	CB030563-075	1000	±10	51065-0700					
7	CB030563-076	150	±6	51065-0700					

WIRE CHART:

SIDE A		SIDE B
PIN 1	Red	stripped
PIN 2	Black	stripped
PIN 3	Yellow	stripped
PIN 4	Green	stripped
PIN 5	Blue	stripped
PIN 6	White	stripped
PIN 7	Orange	stripped
PIN 8	Gray	stripped
PIN 9	Purple	stripped
PIN 10	Brown	stripped

REMARK:

1) ROHS 2.0 COMPLIANT.
2) MEET IPC-620 SPECIFICAITON.

S/N	Q'TY	UNIT	DESCRIPTION
5	AR	M	HEAT SHRINK TUBE, BLACK
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE
3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, COLOR SEE TABLE, 24AWG
2	N	PCS	2.00mm PITCH MICRO LATCH FEMALE TERMINAL, MOLEX 50212-8000
1	1	PCS	2.00mm PITCH MICRO LATCH FEMALE HSG, XXP, MOLEX 51065-XX00

GENERAL TOLERANCE UNLESS SPECIFIED:
0 PLC ± 1.27
1 PLC ± 0.50
2 PLC ± 0.13
3 PLC ± 0.03
4 PLC ± 0.002
ANGLES ±3°

APPROVED	P/N:
RW	SEE TABLE
CHECKED	DOC#
CT	SD-CB030563
DRAWN	
MW	CUSTOMER COPY

CONBEONE
www.conbeone.com

TITLE: 2.00MM PITCH OTS, WIRE HARNESS MOLEX MICRO LATCH , SINGLE END, TYPE CSEP

SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S	1 OF 1	A

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION