


4

3


2

1



REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250829



8P



3P

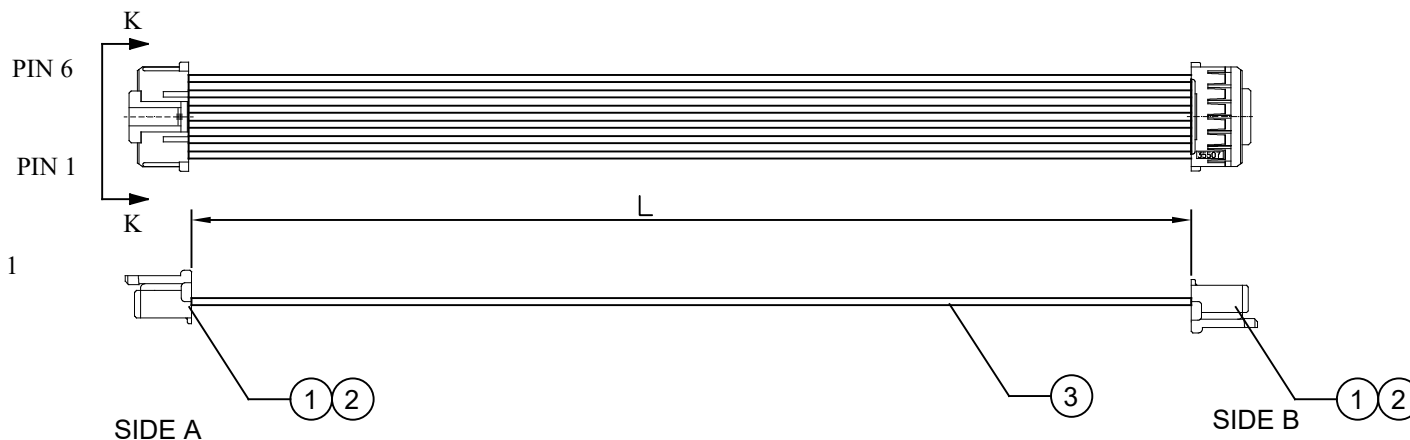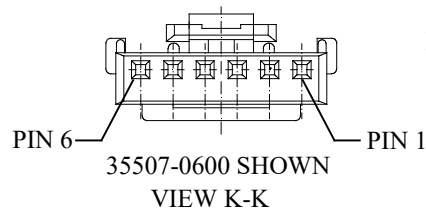

SIDE A

SIDE B

CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASS'Y P/N	L(MM)	Tolerance	HSG P/N
2	CB030571-021	100	±6	35507-0200	8	CB030571-081	100	±6	35507-0800	13	CB030571-131	100	±6	35507-1300
2	CB030571-022	200	±8	35507-0200	8	CB030571-082	200	±8	35507-0800	13	CB030571-132	200	±8	35507-1300
2	CB030571-023	300	±8	35507-0200	8	CB030571-083	300	±8	35507-0800	13	CB030571-133	300	±8	35507-1300
2	CB030571-024	500	±10	35507-0200	8	CB030571-084	500	±10	35507-0800	13	CB030571-134	500	±10	35507-1300
2	CB030571-025	1000	±10	35507-0200	8	CB030571-085	1000	±10	35507-0800	13	CB030571-135	1000	±10	35507-1300
2	CB030571-026	150	±6	35507-0200	8	CB030571-086	150	±6	35507-0800	13	CB030571-136	150	±6	35507-1300
3	CB030571-031	100	±6	35507-0300	9	CB030571-091	100	±6	35507-0900	14	CB030571-141	100	±6	35507-1400
3	CB030571-032	200	±8	35507-0300	9	CB030571-092	200	±8	35507-0900	14	CB030571-142	200	±8	35507-1400
3	CB030571-033	300	±8	35507-0300	9	CB030571-093	300	±8	35507-0900	14	CB030571-143	300	±8	35507-1400
3	CB030571-034	500	±10	35507-0300	9	CB030571-094	500	±10	35507-0900	14	CB030571-144	500	±10	35507-1400
3	CB030571-035	1000	±10	35507-0300	9	CB030571-095	1000	±10	35507-0900	14	CB030571-145	1000	±10	35507-1400
3	CB030571-036	150	±6	35507-0300	9	CB030571-096	150	±6	35507-0900	14	CB030571-146	150	±6	35507-1400
4	CB030571-041	100	±6	35507-0400	10	CB030571-101	100	±6	35507-1000	15	CB030571-151	100	±6	35507-1500
4	CB030571-042	200	±8	35507-0400	10	CB030571-102	200	±8	35507-1000	15	CB030571-152	200	±8	35507-1500
4	CB030571-043	300	±8	35507-0400	10	CB030571-103	300	±8	35507-1000	15	CB030571-153	300	±8	35507-1500
4	CB030571-044	500	±10	35507-0400	10	CB030571-104	500	±10	35507-1000	15	CB030571-154	500	±10	35507-1500
4	CB030571-045	1000	±10	35507-0400	10	CB030571-105	1000	±10	35507-1000	15	CB030571-155	1000	±10	35507-1500
4	CB030571-046	150	±6	35507-0400	10	CB030571-106	150	±6	35507-1000	15	CB030571-156	150	±6	35507-1500
5	CB030571-051	100	±6	35507-0500	11	CB030571-111	100	±6	35507-1100					
5	CB030571-052	200	±8	35507-0500	11	CB030571-112	200	±8	35507-1100					
5	CB030571-053	300	±8	35507-0500	11	CB030571-113	300	±8	35507-1100					
5	CB030571-054	500	±10	35507-0500	11	CB030571-114	500	±10	35507-1100					
5	CB030571-055	1000	±10	35507-0500	11	CB030571-115	1000	±10	35507-1100					
5	CB030571-056	150	±6	35507-0500	11	CB030571-116	150	±6	35507-1100					
6	CB030571-061	100	±6	35507-0600	12	CB030571-121	100	±6	35507-1200					
6	CB030571-062	200	±8	35507-0600	12	CB030571-122	200	±8	35507-1200					
6	CB030571-063	300	±8	35507-0600	12	CB030571-123	300	±8	35507-1200					
6	CB030571-064	500	±10	35507-0600	12	CB030571-124	500	±10	35507-1200					
6	CB030571-065	1000	±10	35507-0600	12	CB030571-125	1000	±10	35507-1200					
6	CB030571-066	150	±6	35507-0600	12	CB030571-126	150	±6	35507-1200					
7	CB030571-071	100	±6	35507-0700										
7	CB030571-072	200	±8	35507-0700										
7	CB030571-073	300	±8	35507-0700										
7	CB030571-074	500	±10	35507-0700										
7	CB030571-075	1000	±10	35507-0700										
7	CB030571-076	150	±6	35507-0700										

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	PIN 1	
PIN 2	Black	PIN 2	35507-0200
PIN 3	Yellow	PIN 3	35507-0300
PIN 4	Green	PIN 4	35507-0400
PIN 5	Blue	PIN 5	35507-0500
PIN 6	White	PIN 6	35507-0600
PIN 7	Orange	PIN 7	35507-0700
PIN 8	Gray	PIN 8	35507-0800
PIN 9	Purple	PIN 9	35507-0900
PIN 10	Brown	PIN 10	35507-1000
PIN 11	Red	PIN 11	35507-1100
PIN 12	Black	PIN 12	35507-1200
PIN 13	Yellow	PIN 13	35507-1300
PIN 14	Green	PIN 14	35507-1400
PIN 15	Blue	PIN 15	35507-1500

REMARK:

1) ROHS 2.0 COMPLIANT.

2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 HOOK WIRE, 80 C, 300V, COLOR SEE TABLE, 24AWG				
2	2N	PCS	2.00mm PITCH SHERLOCK FEMALE TERMINAL, MOLEX 50212-8000				
1	2	PCS	2.00mm PITCH SHERLOCK FEMALE HSG, XXP, MOLEX 35507-XX00				
S/N	QTY	UNIT	DESCRIPTION				
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com		
			RW	SEE TABLE			
			CHECKED	DOC#	TITLE: 2.00MM PITCH OTS, WIRE HARNESS MOLEX SHERLOCK, SINGLE END, TYPE CDB		
			CT	SD-CB030571			
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN	CUSTOMER COPY			
			MW				
						SIZE	UNIT
			A4	MM	N.T.S	1 OF 1	A

4

3

2

1