



REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250829

35507-0800	
SIDE A	SIDE B
PIN 1	Red PIN 8
PIN 2	Black PIN 7
PIN 3	Yellow PIN 6
PIN 4	Green PIN 5
PIN 5	Blue PIN 4
PIN 6	White PIN 3
PIN 7	Orange PIN 2
PIN 8	Gray PIN 1

35507-09000	
SIDE A	SIDE B
PIN 1	Red PIN 9
PIN 2	Black PIN 8
PIN 3	Yellow PIN 7

35507-1000

SIDE A		SIDE B	
PIN 1	Red	PIN 10	
PIN 2	Black	PIN 9	
PIN 3	Yellow	PIN 8	
PIN 4	Green	PIN 7	
PIN 5	Blue	PIN 6	
PIN 6	White	PIN 5	
PIN 7	Orange	PIN 4	
PIN 8	Gray	PIN 3	
PIN 9	Purple	PIN 2	
PIN 10	Brown	PIN 1	

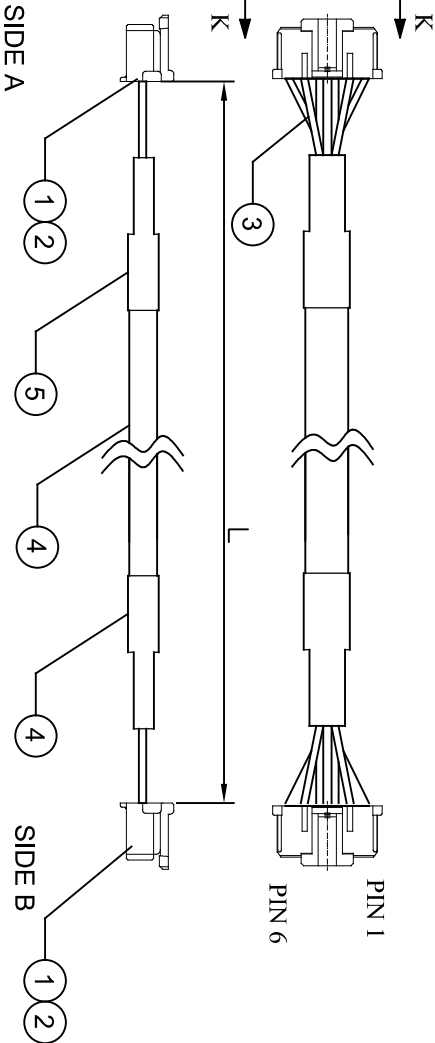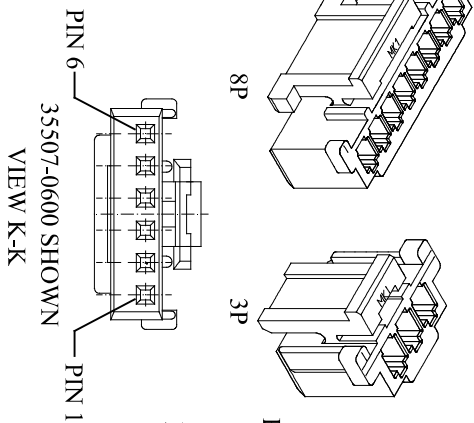

REMARK:
1) ROHS 2.0 COMPLIANT.
2) MEET IPC-620 SPECIFICATION.

CKTS	ASSY P/N	L(MM)	Tolerance	HSG P/N	CKTS	ASSY P/N	L(MM)	Tolerance	HSG P/N
2	CB030573-021	100	±6	35507-0200	8	CB030573-081	100	±6	35507-0800
2	CB030573-022	200	±8	35507-0200	8	CB030573-082	200	±8	35507-0800
2	CB030573-023	300	±8	35507-0200	8	CB030573-083	300	±8	35507-0800
2	CB030573-024	500	±10	35507-0200	8	CB030573-084	500	±10	35507-0800
2	CB030573-025	1000	±10	35507-0200	8	CB030573-085	1000	±10	35507-0800
2	CB030573-026	150	±6	35507-0200	8	CB030573-086	150	±6	35507-0800
3	CB030573-031	100	±6	35507-0300	9	CB030573-091	100	±6	35507-0900
3	CB030573-032	200	±8	35507-0300	9	CB030573-092	200	±8	35507-0900
3	CB030573-033	300	±8	35507-0300	9	CB030573-093	300	±8	35507-0900
3	CB030573-034	500	±10	35507-0300	9	CB030573-094	500	±10	35507-0900
3	CB030573-035	1000	±10	35507-0300	9	CB030573-095	1000	±10	35507-0900
3	CB030573-036	150	±6	35507-0300	9	CB030573-096	150	±6	35507-0900
4	CB030573-041	100	±6	35507-0400	10	CB030573-101	100	±6	35507-1000
4	CB030573-043	300	±8	35507-0400	10	CB030573-103	300	±8	35507-1000
4	CB030573-044	500	±10	35507-0400	10	CB030573-104	500	±10	35507-1000
4	CB030573-045	1000	±10	35507-0400	10	CB030573-105	1000	±10	35507-1000
4	CB030573-046	150	±6	35507-0400	10	CB030573-106	150	±6	35507-1000
5	CB030573-051	100	±6	35507-0500					
5	CB030573-052	200	±8	35507-0500					
5	CB030573-053	300	±8	35507-0500					
5	CB030573-054	500	±10	35507-0500					
5	CB030573-055	1000	±10	35507-0500					
5	CB030573-056	150	±6	35507-0500					
6	CB030573-061	100	±6	35507-0600					
6	CB030573-062	200	±8	35507-0600					
6	CB030573-063	300	±8	35507-0600					
6	CB030573-064	500	±10	35507-0600					
6	CB030573-065	1000	±10	35507-0600					
6	CB030573-066	150	±6	35507-0600					
7	CB030573-071	100	±6	35507-0700					
7	CB030573-072	200	±8	35507-0700					
7	CB030573-073	300	±8	35507-0700					
7	CB030573-074	500	±10	35507-0700					
7	CB030573-075	1000	±10	35507-0700					
7	CB030573-076	150	±6	35507-0700					

WIRE CHART:

35507-0200

SIDE A		SIDE B
PIN 1	—— Red	PIN 2
PIN 2	—— Black	PIN 1

35507-0300

SIDE A		SIDE B	
PIN 1	—— Red	PIN 3	
PIN 2	—— Black	PIN 2	
PIN 3	—— Yellow	PIN 1	

35507-0400

SIDE A		SIDE B
PIN 1	—— Red	PIN 4
PIN 2	—— Black	PIN 3
PIN 3	—— Yellow	PIN 2
PIN 4	—— Green	PIN 1

35507-0500

SIDE A		SIDE B
PIN 1	—— Red	PIN 5
PIN 2	—— Black	PIN 4
PIN 3	—— Yellow	PIN 3
PIN 4	—— Green	PIN 2
PIN 5	—— Blue	PIN 1

SIDE A		SIDE B	
PIN 1	Red	PIN 6	
PIN 2	Black	PIN 5	
PIN 3	Yellow	PIN 4	
PIN 4	Green	PIN 3	
PIN 5	Blue	PIN 2	
PIN 6	White	PIN 1	

35507-0700

SIDE A		SIDE B	
PIN 1	— Red	PIN 7	
PIN 2	— Black	PIN 6	
PIN 3	— Yellow	PIN 5	
PIN 4	— Green	PIN 4	
PIN 5	— Blue	PIN 3	
PIN 6	— White	PIN 2	
PIN 7	— Orange	PIN 1	

5	AR	M	HEAT SHRINK TUBE, BLACK, NO-SHRINKABLE
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE
3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, COLOR SEE TABLE, 24AWG
2	N	PCS	2.00mm PITCH SHERLOCK FEMALE TERMINAL, MOLEX 50212-8000
1	I	PCS	2.00mm PITCH SHERLOCK FEMALE HSG, XXP, MOLEX 35507-XX00
DESCRIPTION			
S/N	QTY	UNIT	
GENERAL TOLERANCE			
UNLESS SPECIFIED:			
0 P/C ±1.27			
2 P/C ±0.13			
4 P/C ±0.03			
4 P/C ±0.002			
ANGLES 3P°			
THE DRAWING IS A CONTROL DOCUMENTATION. IT IS NOT TO BE USED FOR MANUFACTURING. IT IS SUBJECT TO CHANGE AND THE SUPPLIER ENGINEERING DEPARTMENT SHALL BE NOTIFIED BY E-MAIL FOR LATEST REVISION.			
APPROVED		PIN:	
RW		SEE TABLE	
CHECKED		DOCF	
CT		SD-CB030573	
DRAWN		MW	
CUSTOMER COPY		SIZE	
		UNIT	
		SCALE	
		PAGE	
		1 OF 1	
		REV	
		A	

