



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/10/17

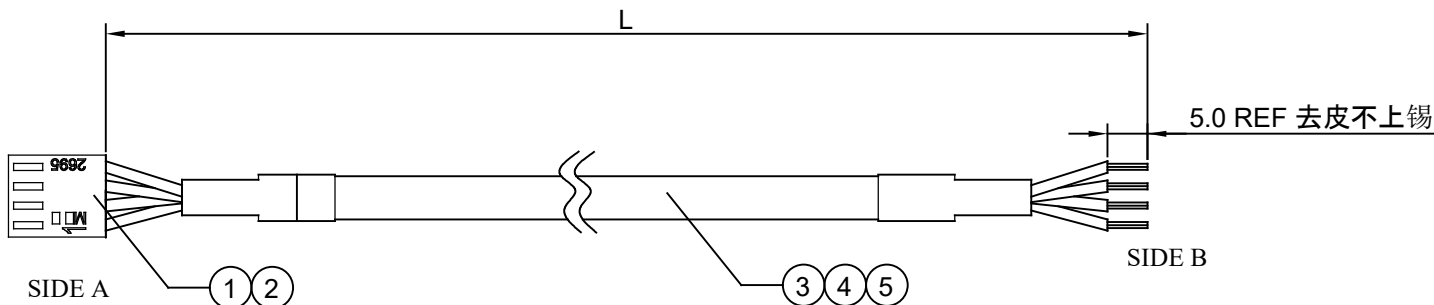

SHOWN OF 22013047

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB030583-021	100	±6	22-01-3027
2	CB030583-022	200	±6	22-01-3027
2	CB030583-023	300	±6	22-01-3027
2	CB030583-024	500	±8	22-01-3027
2	CB030583-025	1000	±10	22-01-3027
3	CB030583-031	100	±6	22-01-3037
3	CB030583-032	200	±6	22-01-3037
3	CB030583-033	300	±6	22-01-3037
3	CB030583-034	500	±8	22-01-3037
3	CB030583-035	1000	±10	22-01-3037
4	CB030583-041	100	±6	22-01-3047
4	CB030583-042	200	±6	22-01-3047
4	CB030583-043	300	±6	22-01-3047
4	CB030583-044	500	±8	22-01-3047
4	CB030583-045	1000	±10	22-01-3047
5	CB030583-051	100	±6	22-01-3057
5	CB030583-052	200	±6	22-01-3057
5	CB030583-053	300	±6	22-01-3057
5	CB030583-054	500	±8	22-01-3057
5	CB030583-055	1000	±10	22-01-3057
6	CB030583-061	100	±6	22-01-3067
6	CB030583-062	200	±6	22-01-3067
6	CB030583-063	300	±6	22-01-3067
6	CB030583-064	500	±8	22-01-3067
6	CB030583-065	1000	±10	22-01-3067
7	CB030583-071	100	±6	22-01-3077
7	CB030583-072	200	±6	22-01-3077
7	CB030583-073	300	±6	22-01-3077
7	CB030583-074	500	±8	22-01-3077
7	CB030583-075	1000	±10	22-01-3077
8	CB030583-081	100	±6	22-01-3087
8	CB030583-082	200	±6	22-01-3087
8	CB030583-083	300	±6	22-01-3087
8	CB030583-084	500	±8	22-01-3087
8	CB030583-085	1000	±10	22-01-3087

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
9	CB030583-091	100	±6	22-01-3097
9	CB030583-092	200	±6	22-01-3097
9	CB030583-093	300	±6	22-01-3097
9	CB030583-094	500	±8	22-01-3097
9	CB030583-095	1000	±10	22-01-3097
10	CB030583-101	100	±6	22-01-3107
10	CB030583-102	200	±6	22-01-3107
10	CB030583-103	300	±6	22-01-3107
10	CB030583-104	500	±8	22-01-3107
10	CB030583-105	1000	±10	22-01-3107

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	OPEN	
PIN 2	Black	OPEN	22-01-3027
PIN 3	Yellow	OPEN	22-01-3037
PIN 4	Green	OPEN	22-01-3047
PIN 5	Blue	OPEN	22-01-3057
PIN 6	White	OPEN	22-01-3067
PIN 7	Orange	OPEN	22-01-3077
PIN 8	Gray	OPEN	22-01-3087
PIN 9	Purple	OPEN	22-01-3097
PIN 10	Brown	OPEN	22-01-3107

5	AR	M	HEAT SHRINK TUBE, BLACK					
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE					
3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, COLOR SEE TABLE, 22AWG					
2	N	PCS	2.54mm PITCH KK254 FEMALE TERMINAL, MOLEX 8500031					
1	I	PCS	2.54mm PITCH KK254 FEMALE HSG, MOLEX 22-01-3xx7					
S/N	Q'TY	UNIT	DESCRIPTION					
			GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com	
					RW	SEE TABLE		
					CHECKED	DOC#	TITLE: MOLEX 2.54MM PITCH OTS KK254, SINGLE END, TYPE CSEP	
					CT	SD-CB030583		
			THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGJIANG CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION		DRAWN	CUSTOMER COPY		
					MW			
			SIZE	UNIT	SCALE	PAGE	REV	
			A4	MM	N.T.S	1 OF 1	A	

4

3

2

1