


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/10/17

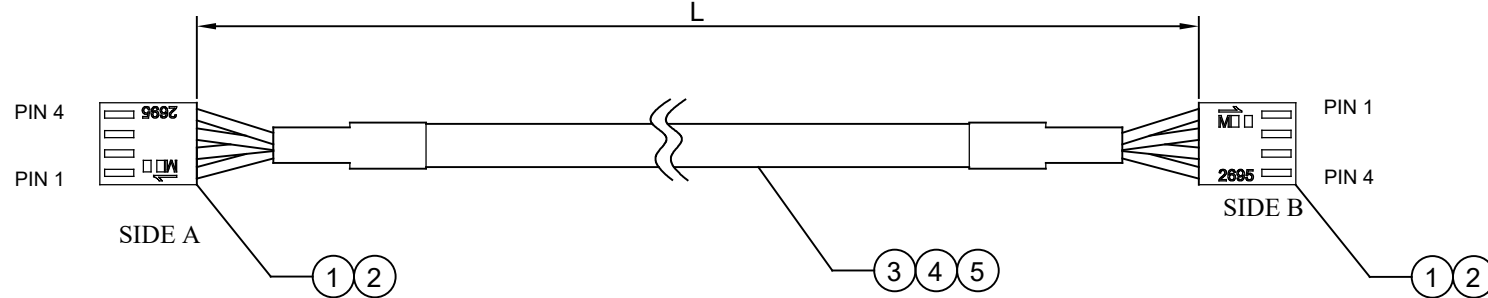

SHOWN OF 22013047

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB030584-021	100	±6	22-01-3027
2	CB030584-022	200	±6	22-01-3027
2	CB030584-023	300	±6	22-01-3027
2	CB030584-024	500	±8	22-01-3027
2	CB030584-025	1000	±10	22-01-3027
3	CB030584-031	100	±6	22-01-3037
3	CB030584-032	200	±6	22-01-3037
3	CB030584-033	300	±6	22-01-3037
3	CB030584-034	500	±8	22-01-3037
3	CB030584-035	1000	±10	22-01-3037
4	CB030584-041	100	±6	22-01-3047
4	CB030584-042	200	±6	22-01-3047
4	CB030584-043	300	±6	22-01-3047
4	CB030584-044	500	±8	22-01-3047
4	CB030584-045	1000	±10	22-01-3047
5	CB030584-051	100	±6	22-01-3057
5	CB030584-052	200	±6	22-01-3057
5	CB030584-053	300	±6	22-01-3057
5	CB030584-054	500	±8	22-01-3057
5	CB030584-055	1000	±10	22-01-3057
6	CB030584-061	100	±6	22-01-3067
6	CB030584-062	200	±6	22-01-3067
6	CB030584-063	300	±6	22-01-3067
6	CB030584-064	500	±8	22-01-3067
6	CB030584-065	1000	±10	22-01-3067
7	CB030584-071	100	±6	22-01-3077
7	CB030584-072	200	±6	22-01-3077
7	CB030584-073	300	±6	22-01-3077
7	CB030584-074	500	±8	22-01-3077
7	CB030584-075	1000	±10	22-01-3077
8	CB030584-081	100	±6	22-01-3087
8	CB030584-082	200	±6	22-01-3087
8	CB030584-083	300	±6	22-01-3087
8	CB030584-084	500	±8	22-01-3087
8	CB030584-085	1000	±10	22-01-3087
9	CB030584-091	100	±6	22-01-3097
9	CB030584-092	200	±6	22-01-3097
9	CB030584-093	300	±6	22-01-3097
9	CB030584-094	500	±8	22-01-3097
9	CB030584-095	1000	±10	22-01-3097
10	CB030584-101	100	±6	22-01-3107
10	CB030584-102	200	±6	22-01-3107
10	CB030584-103	300	±6	22-01-3107
10	CB030584-104	500	±8	22-01-3107
10	CB030584-105	1000	±10	22-01-3107

22-01-3027

SIDE A		SIDE B
PIN 1	—— Red	PIN 2
PIN 2	—— Black	PIN 1

22-01-3037

SIDE A		SIDE B
PIN 1	—— Red	PIN 3
PIN 2	—— Black	PIN 2
PIN 3	—— Yellow	PIN 1

22-01-3047

SIDE A		SIDE B
PIN 1	—— Red	PIN 4
PIN 2	—— Black	PIN 3
PIN 3	—— Yellow	PIN 2
PIN 4	—— Green	PIN 1

22-01-3067

SIDE A		SIDE B
PIN 1	—— Red	PIN 6
PIN 2	—— Black	PIN 5
PIN 3	—— Yellow	PIN 4
PIN 4	—— Green	PIN 3
PIN 5	—— Blue	PIN 2
PIN 6	—— White	PIN 1

22-01-3067

SIDE A		SIDE B
PIN 1	—— Red	PIN 6
PIN 2	—— Black	PIN 5
PIN 3	—— Yellow	PIN 4
PIN 4	—— Green	PIN 3
PIN 5	—— Blue	PIN 2
PIN 6	—— White	PIN 1

22-01-3077

SIDE A		SIDE B
PIN 1	—— Red	PIN 7
PIN 2	—— Black	PIN 6
PIN 3	—— Yellow	PIN 5
PIN 4	—— Green	PIN 4
PIN 5	—— Blue	PIN 3
PIN 6	—— White	PIN 2
PIN 7	—— Orange	PIN 1

22-01-3087

SIDE A		SIDE B
PIN 1	—— Red	PIN 8
PIN 2	—— Black	PIN 7
PIN 3	—— Yellow	PIN 6
PIN 4	—— Green	PIN 5
PIN 5	—— Blue	PIN 4
PIN 6	—— White	PIN 3
PIN 7	—— Orange	PIN 2
PIN 8	—— Gray	PIN 1

22-01-3097

SIDE A		SIDE B
PIN 1	—— Red	PIN 9
PIN 2	—— Black	PIN 8
PIN 3	—— Yellow	PIN 7
PIN 4	—— Green	PIN 6
PIN 5	—— Blue	PIN 5
PIN 6	—— White	PIN 4
PIN 7	—— Orange	PIN 3
PIN 8	—— Gray	PIN 2
PIN 9	—— Purple	PIN 1

22-01-3107

SIDE A		SIDE B
PIN 1	—— Red	PIN 10
PIN 2	—— Black	PIN 9
PIN 3	—— Yellow	PIN 8
PIN 4	—— Green	PIN 7
PIN 5	—— Blue	PIN 6
PIN 6	—— White	PIN 5
PIN 7	—— Orange	PIN 4
PIN 8	—— Gray	PIN 3
PIN 9	—— Purple	PIN 2
PIN 10	—— Brown	PIN 1

5	AR	M	HEAT SHRINK TUBE, BLACK		
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE		
3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, COLOR SEE TABLE, 22AWG		
2	2N	PCS	2.54mm PITCH KK254 FEMALE TERMINAL, MOLEX 8500031		
1	2	PCS	2.54mm PITCH KK254 FEMALE HSG, MOLEX 22-01-3xx7		
S/N	Q'TY	UNIT	DESCRIPTION		
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com
			RW	SEE TABLE	
			CHECKED	DOC#	TITLE : MOLEX 2.54MM PITCH OTS
			CT	SD-CB030584	KK254, DUAL ENDS TYPE A, TYPE CDAP
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGJIAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION			DRAWN	CUSTOMER COPY	SIZE
			MW		UNIT
					SCALE
					PAGE
					REV
	A4	MM	N.T.S	1 OF 1	A

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.