


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/10/17

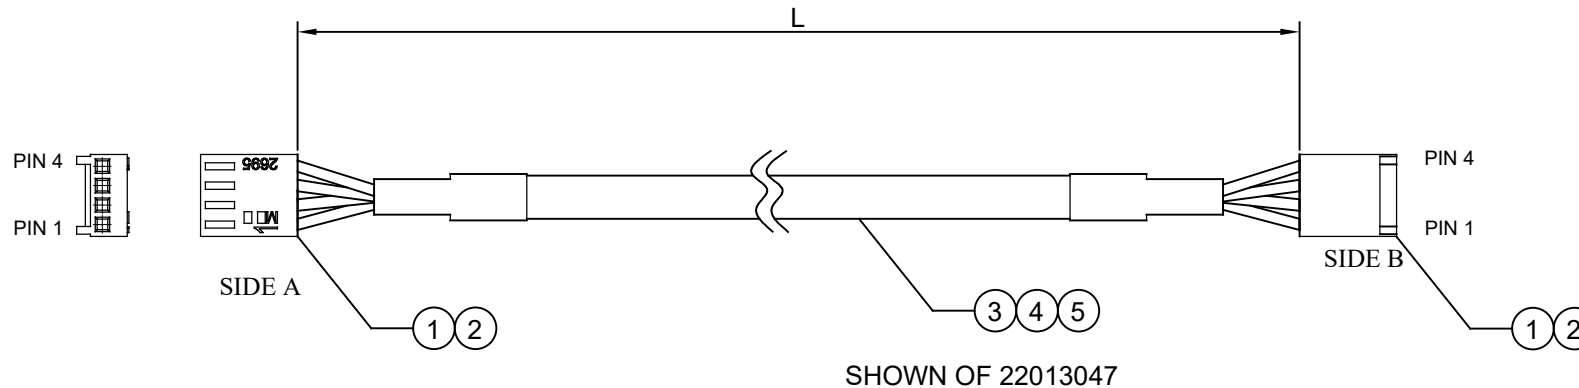

SHOWN OF 22013047

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
2	CB030585-021	100	±6	22-01-3027
2	CB030585-022	200	±6	22-01-3027
2	CB030585-023	300	±6	22-01-3027
2	CB030585-024	500	±8	22-01-3027
2	CB030585-025	1000	±10	22-01-3027
3	CB030585-031	100	±6	22-01-3037
3	CB030585-032	200	±6	22-01-3037
3	CB030585-033	300	±6	22-01-3037
3	CB030585-034	500	±8	22-01-3037
3	CB030585-035	1000	±10	22-01-3037
4	CB030585-041	100	±6	22-01-3047
4	CB030585-042	200	±6	22-01-3047
4	CB030585-043	300	±6	22-01-3047
4	CB030585-044	500	±8	22-01-3047
4	CB030585-045	1000	±10	22-01-3047
5	CB030585-051	100	±6	22-01-3057
5	CB030585-052	200	±6	22-01-3057
5	CB030585-053	300	±6	22-01-3057
5	CB030585-054	500	±8	22-01-3057
5	CB030585-055	1000	±10	22-01-3057
6	CB030585-061	100	±6	22-01-3067
6	CB030585-062	200	±6	22-01-3067
6	CB030585-063	300	±6	22-01-3067
6	CB030585-064	500	±8	22-01-3067
6	CB030585-065	1000	±10	22-01-3067
7	CB030585-071	100	±6	22-01-3077
7	CB030585-072	200	±6	22-01-3077
7	CB030585-073	300	±6	22-01-3077
7	CB030585-074	500	±8	22-01-3077
7	CB030585-075	1000	±10	22-01-3077
8	CB030585-081	100	±6	22-01-3087
8	CB030585-082	200	±6	22-01-3087
8	CB030585-083	300	±6	22-01-3087
8	CB030585-084	500	±8	22-01-3087
8	CB030585-085	1000	±10	22-01-3087

CKTS	CABLE P/N	L(MM)	Tolerance	HSG P/N
9	CB030585-091	100	±6	22-01-3097
9	CB030585-092	200	±6	22-01-3097
9	CB030585-093	300	±6	22-01-3097
9	CB030585-094	500	±8	22-01-3097
9	CB030585-095	1000	±10	22-01-3097
10	CB030585-101	100	±6	22-01-3107
10	CB030585-102	200	±6	22-01-3107
10	CB030585-103	300	±6	22-01-3107
10	CB030585-104	500	±8	22-01-3107
10	CB030585-105	1000	±10	22-01-3107

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

WIRE CHART:

SIDE A		SIDE B	Housing P/N
PIN 1	Red	PIN 1	22-01-3027
PIN 2	Black	PIN 2	22-01-3037
PIN 3	Yellow	PIN 3	22-01-3047
PIN 4	Green	PIN 4	22-01-3057
PIN 5	Blue	PIN 5	22-01-3067
PIN 6	White	PIN 6	22-01-3077
PIN 7	Orange	PIN 7	22-01-3087
PIN 8	Gray	PIN 8	22-01-3097
PIN 9	Purple	PIN 9	22-01-3107
PIN 10	Brown	PIN 10	22-01-3107

5	AR	M	HEAT SHRINK TUBE, BLACK				
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE				
3	AR	M	UL1061 HOOK WIRE: 80°C, 300V, COLOR SEE TABLE, 22AWG				
2	2N	PCS	2.54mm PITCH KK254 FEMALE TERMINAL, MOLEX 8500031				
1	2	PCS	2.54mm PITCH KK254 FEMALE HSG, MOLEX 22-01-3xx7				
S/N	Q'TY	UNIT	DESCRIPTION				
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED	P/N:	CONBEONE www.conbeone.com TITLE : MOLEX 2.54MM PITCH OTS KK254, DUAL ENDS TYPE B, TYPE CDBP		
			RW	SEE TABLE			
			CHECKED	DOC#			
			CT	SD-CB030585			
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGJIAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONSULTED FOR LATEST REVISION			DRAWN	CUSTOMER COPY			
			MW	SIZE	UNIT	SCALE	PAGE
			A4	MM	N.T.S	1 OF 1	A

THE DRAWING IS A CONTROLLED DOCUMENT FOR
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING
CONTROLLING ORGANIZATION SHOULD BE
CONTACTED FOR LATEST REVISION.