


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	260515

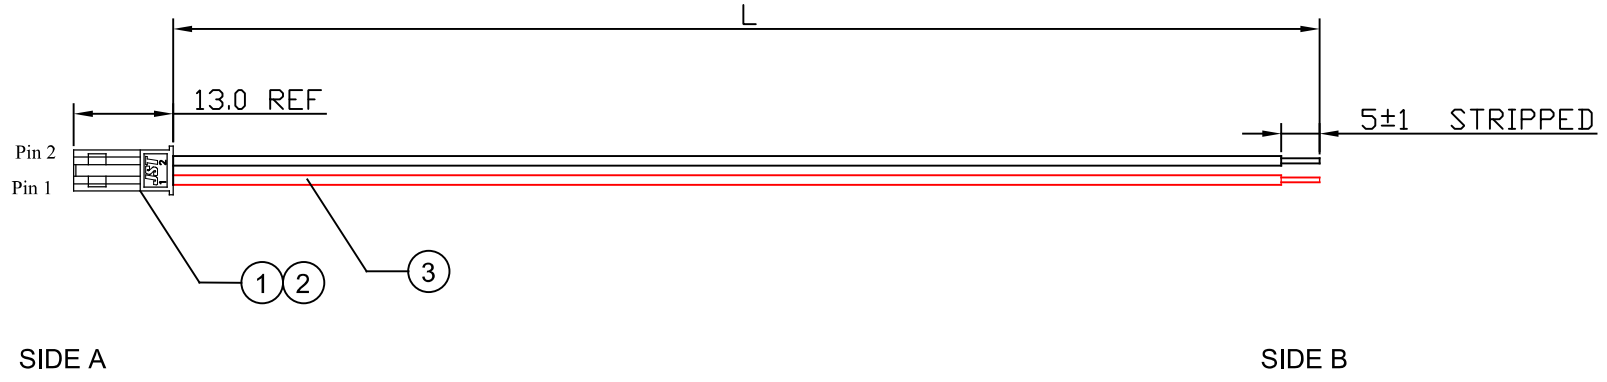

CONBEONE P/N	L(MM)	TOLERANCE	HSG COLOR	HSG P/N
CB030595-001	100	±5	RED	SYP-02T-1
CB030595-002	200	±5		
CB030595-003	300	±5		
CB030595-004	500	±10		
CB030595-005	1000	±10		
CB030595-101	100	±5	WHITE	SYP-02TV-1
CB030595-102	200	±5		
CB030595-103	300	±5		
CB030595-104	500	±10		
CB030595-105	1000	±10		

WIRE CHART:

SIDE A		SIDE B
PIN 1	— Red	OPEN
PIN 2	— Black	OPEN

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

3	AR	M	UL1061 HOOK WIRE, 80°C, 300V, BLACK, 22AWG, RED AND BLACK
2	2	PCS	2.50mm PITCH RCY SOCKET TERMINAL, TIN PLATED, JST SYF-001T-P0.6
1	1	PCS	2.50mm PITCH RCY PLUG HSG, 2P, JST SYP-02T-1 or SYP-02TV-1

S/N	Q'TY	UNIT	DESCRIPTION							
	GENERAL TOLERANCE UNLESS SPECIFIED:		APPROVED	P/N:		 www.conbeone.com				
	0 PLC ± 1.27	1 PLC ± 0.50	RW	SEE TABLE						
	2 PLC ± 0.13	3 PLC ± 0.03	CHECKED	DOCH#		TITLE: 2.50MM PITCH WIRE HARNESS SYP PIG TAIL				
	4 PLC ± 0.002	ANGLES ± 3°	CT	SD-CB030595						
<small>THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.</small>			DRAWN	CUSTOMER COPY		SIZE	UNIT	SCALE	PAGE	REV
			MW			A4	MM	N.T.S	1 OF 1	A