REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/10/16

Single End (Female)

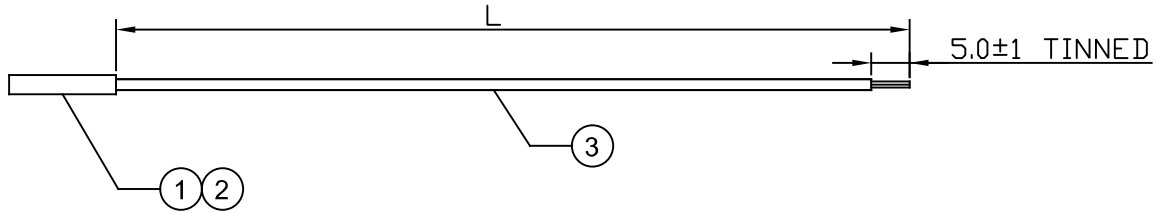

Dual Ends (Female)

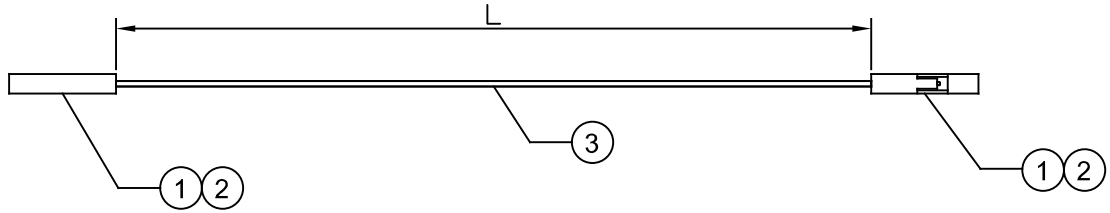

Female to Male

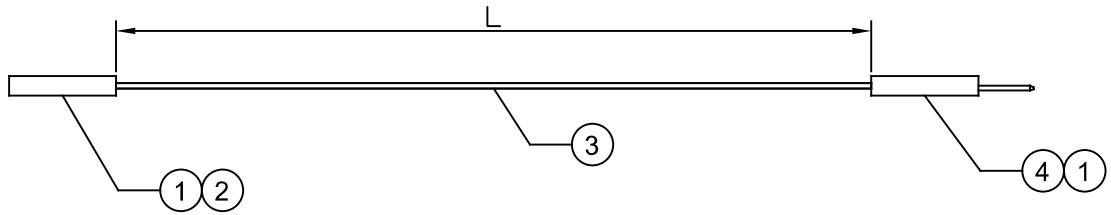

ASS'Y PN (BLACK SHOWN)	L(MM)	TOLERANCE	WIRE COLOR	WIRE TYPE
CB031011-101-BK	100	±5	BLACK	SINGLE END
CB031011-102-BK	200	±5	BLACK	
CB031011-103-BK	300	±5	BLACK	
CB031011-104-BK	500	±10	BLACK	
CB031011-105-BK	1000	±15	BLACK	
CB031011-001-BK	100	±5	BLACK	DUAL ENDS
CB031011-002-BK	200	±5	BLACK	
CB031011-003-BK	300	±5	BLACK	
CB031011-004-BK	500	±10	BLACK	
CB031011-005-BK	1000	±15	BLACK	
CB031011-201-BK	100	±5	BLACK	FEMALE TO MALE
CB031011-202-BK	200	±5	BLACK	
CB031011-203-BK	300	±5	BLACK	
CB031011-204-BK	500	±10	BLACK	
CB031011-205-BK	1000	±15	BLACK	

PART NUMBER RULES:
CB031011-001-BK

COLOR CODE:
- BK: BLACK
- RD: RED
- YW: YELLOW
- GN: GREEN
- BE: BLUE
- WE: WHITE
- OE: ORANGE
- GA: GRAY
- PE: PURPLE
- BN: BROWN

LENGTH CODE

TYPE CODE
- 0: DUAL ENDS (Female)
- 1: SINGLE END (Female)
- 2: FEMALE TO MALE

REMARK:

1) ROHS 2.0 COMPLIANT.
2) MEET IPC-620 SPECIFICAITON.

S/N	Q'TY	UNIT	DESCRIPTION
4	N	PCS	2.54MM PITCH DUPONT MALE TERMINAL, 22~28AWG, HX25402-RT or TJC8 EQUIVALENT
3	AR	M	UL3132 SILLICON RUBBER WIRE, 150°C, 300V, 24AWG, COLOR SEE TABLE
2	AR	PCS	2.54MM PITCH DUPONT FEMALE TERMINAL, 22~28AWG, HX25402-PT or TJC8 EQUIVALENT
1	1	PCS	2.54MM PITCH DUPONT HSG, SINGLE ROW, LOCAL SUPPPLIER HX25402-1Y or TJC8 EQUIVALENT

GENERAL TOLERANCE UNLESS SPECIFIED:
0 PLC ± 1.27
1 PLC ± 0.50
2 PLC ± 0.13
3 PLC ± 0.03
4 PLC ± 0.002
ANGLES ±3°

APPROVED	P/N:	CONBEONE
RW	SEE TABLE	www.conbeone.com
CHECKED	DOC#	TITLE: DUPONT JUMPER WIRES FEMALE TO FEMAEL, BLACK WIRES, BDX
CT	SD-CB031010	
DRAWN		
MW	CUSTOMER COPY	

SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S	1 OF 1	A

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION