


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/10/16

REMARK:  
 1) ROHS 2.0 COMPLIANT.  
 2) MEET IPC-650 SPECIFICATION.

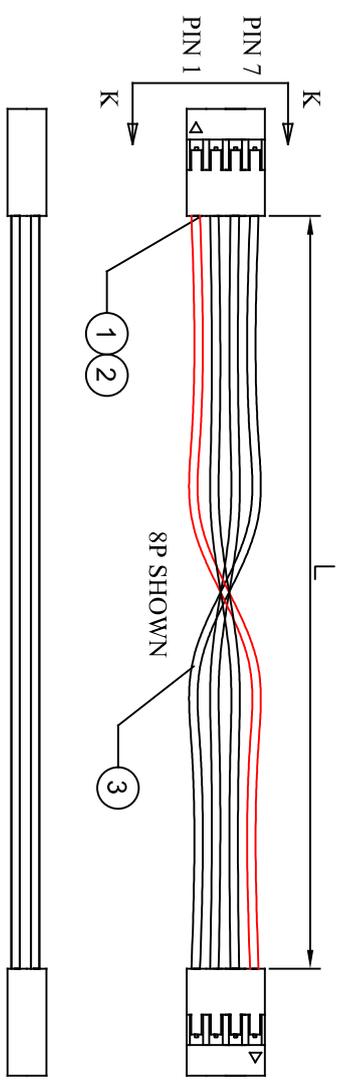

CKT'S	CABLE P/N	L(MM)	Tolerance	HSG P/N
18	CB031013-181	100	±6	HX25402-2*9Y
18	CB031013-182	200	±6	HX25402-2*9Y
18	CB031013-183	300	±6	HX25402-2*9Y
18	CB031013-184	500	±8	HX25402-2*9Y
18	CB031013-185	1000	±10	HX25402-2*9Y
20	CB031013-201	100	±6	HX25402-2*10Y
20	CB031013-202	200	±6	HX25402-2*10Y
20	CB031013-203	300	±6	HX25402-2*10Y
20	CB031013-204	500	±8	HX25402-2*10Y
20	CB031013-205	1000	±10	HX25402-2*10Y
22	CB031013-221	100	±6	HX25402-2*11Y
22	CB031013-222	200	±6	HX25402-2*11Y
22	CB031013-223	300	±6	HX25402-2*11Y
22	CB031013-224	500	±8	HX25402-2*11Y
22	CB031013-225	1000	±10	HX25402-2*11Y

WIRE CHART:

SIDE A	SIDE B	Housing P/N
PIN 1	Red	PIN 1
PIN 2	Black	PIN 2
PIN 3	Black	PIN 3
PIN 4	Black	PIN 4
PIN 5	Black	PIN 5
PIN 6	Black	PIN 6
PIN 7	Black	PIN 7
PIN 8	Black	PIN 8
PIN 9	Black	PIN 9
PIN 10	Black	PIN 10
PIN 11	Black	PIN 11
PIN 12	Black	PIN 12
PIN 13	Black	PIN 13
PIN 14	Black	PIN 14
PIN 15	Black	PIN 15
PIN 16	Black	PIN 16
PIN 17	Black	PIN 17
PIN 18	Black	PIN 18
PIN 19	Black	PIN 19
PIN 20	Black	PIN 20
PIN 21	Black	PIN 21
PIN 22	Black	PIN 22

CKT'S	CABLE P/N	L(MM)	Tolerance	HSG P/N
4	CB031013-041	100	±6	HX25402-2*2Y
4	CB031013-042	200	±6	HX25402-2*2Y
4	CB031013-043	300	±6	HX25402-2*2Y
4	CB031013-044	500	±8	HX25402-2*2Y
4	CB031013-045	1000	±10	HX25402-2*2Y
6	CB031013-061	100	±6	HX25402-2*3Y
6	CB031013-062	200	±6	HX25402-2*3Y
6	CB031013-063	300	±6	HX25402-2*3Y
6	CB031013-064	500	±8	HX25402-2*3Y
6	CB031013-065	1000	±10	HX25402-2*3Y
8	CB031013-081	100	±6	HX25402-2*4Y
8	CB031013-082	200	±6	HX25402-2*4Y
8	CB031013-083	300	±6	HX25402-2*4Y
8	CB031013-084	500	±8	HX25402-2*4Y
8	CB031013-085	1000	±10	HX25402-2*4Y
10	CB031013-101	100	±6	HX25402-2*5Y
10	CB031013-102	200	±6	HX25402-2*5Y
10	CB031013-103	300	±6	HX25402-2*5Y
10	CB031013-104	500	±8	HX25402-2*5Y
10	CB031013-105	1000	±10	HX25402-2*5Y
12	CB031013-121	100	±6	HX25402-2*6Y
12	CB031013-122	200	±6	HX25402-2*6Y
12	CB031013-123	300	±6	HX25402-2*6Y
12	CB031013-124	500	±8	HX25402-2*6Y
12	CB031013-125	1000	±10	HX25402-2*6Y
14	CB031013-141	100	±6	HX25402-2*7Y
14	CB031013-142	200	±6	HX25402-2*7Y
14	CB031013-143	300	±6	HX25402-2*7Y
14	CB031013-144	500	±8	HX25402-2*7Y
14	CB031013-145	1000	±10	HX25402-2*7Y
16	CB031013-161	100	±6	HX25402-2*8Y
16	CB031013-162	200	±6	HX25402-2*8Y
16	CB031013-163	300	±6	HX25402-2*8Y
16	CB031013-164	500	±8	HX25402-2*8Y
16	CB031013-165	1000	±10	HX25402-2*8Y

AR	M	UL1312 SILICON RUBBER WIRE, 150°C, 300V, 24AWG, COLOR SEE TABLE
3	4N	PCS1 2.5MM PITCH DUPONT FEMALE TERMINAL, 22-28AWG, HX25402PT or EQUIVALENT
1	2	PCS1 2.5MM PITCH DUPONT HSG, DUAL ROWS, LOCAL SUPPLIER, HX25402*2*NY or EQUIVALENT

GENERAL TOLEFRANCE	APPROVED	P/N:
UNLESS SPECIFIED: 0 P.L.C ±127 1 P.L.C ±0.13 2 P.L.C ±0.13 3 P.L.C ±0.002 4 P.L.C ±0.002 ANGLES 45°	RW	SEE TABLE

CHECKED	DOCF#	TITLE:
CT	SD-CB031013	DUPONT JUMPER WIRES FEMALE TO FEMALE, BLACK WIRES, BDE

DRAWN	MW	CUSTOMER COPY	SIZE	UNIT	SCALE	PAGE	REV
			A4	MM	N.T.S	1 OF 1	A

**CONBEONE**  
 www.conbeone.com