


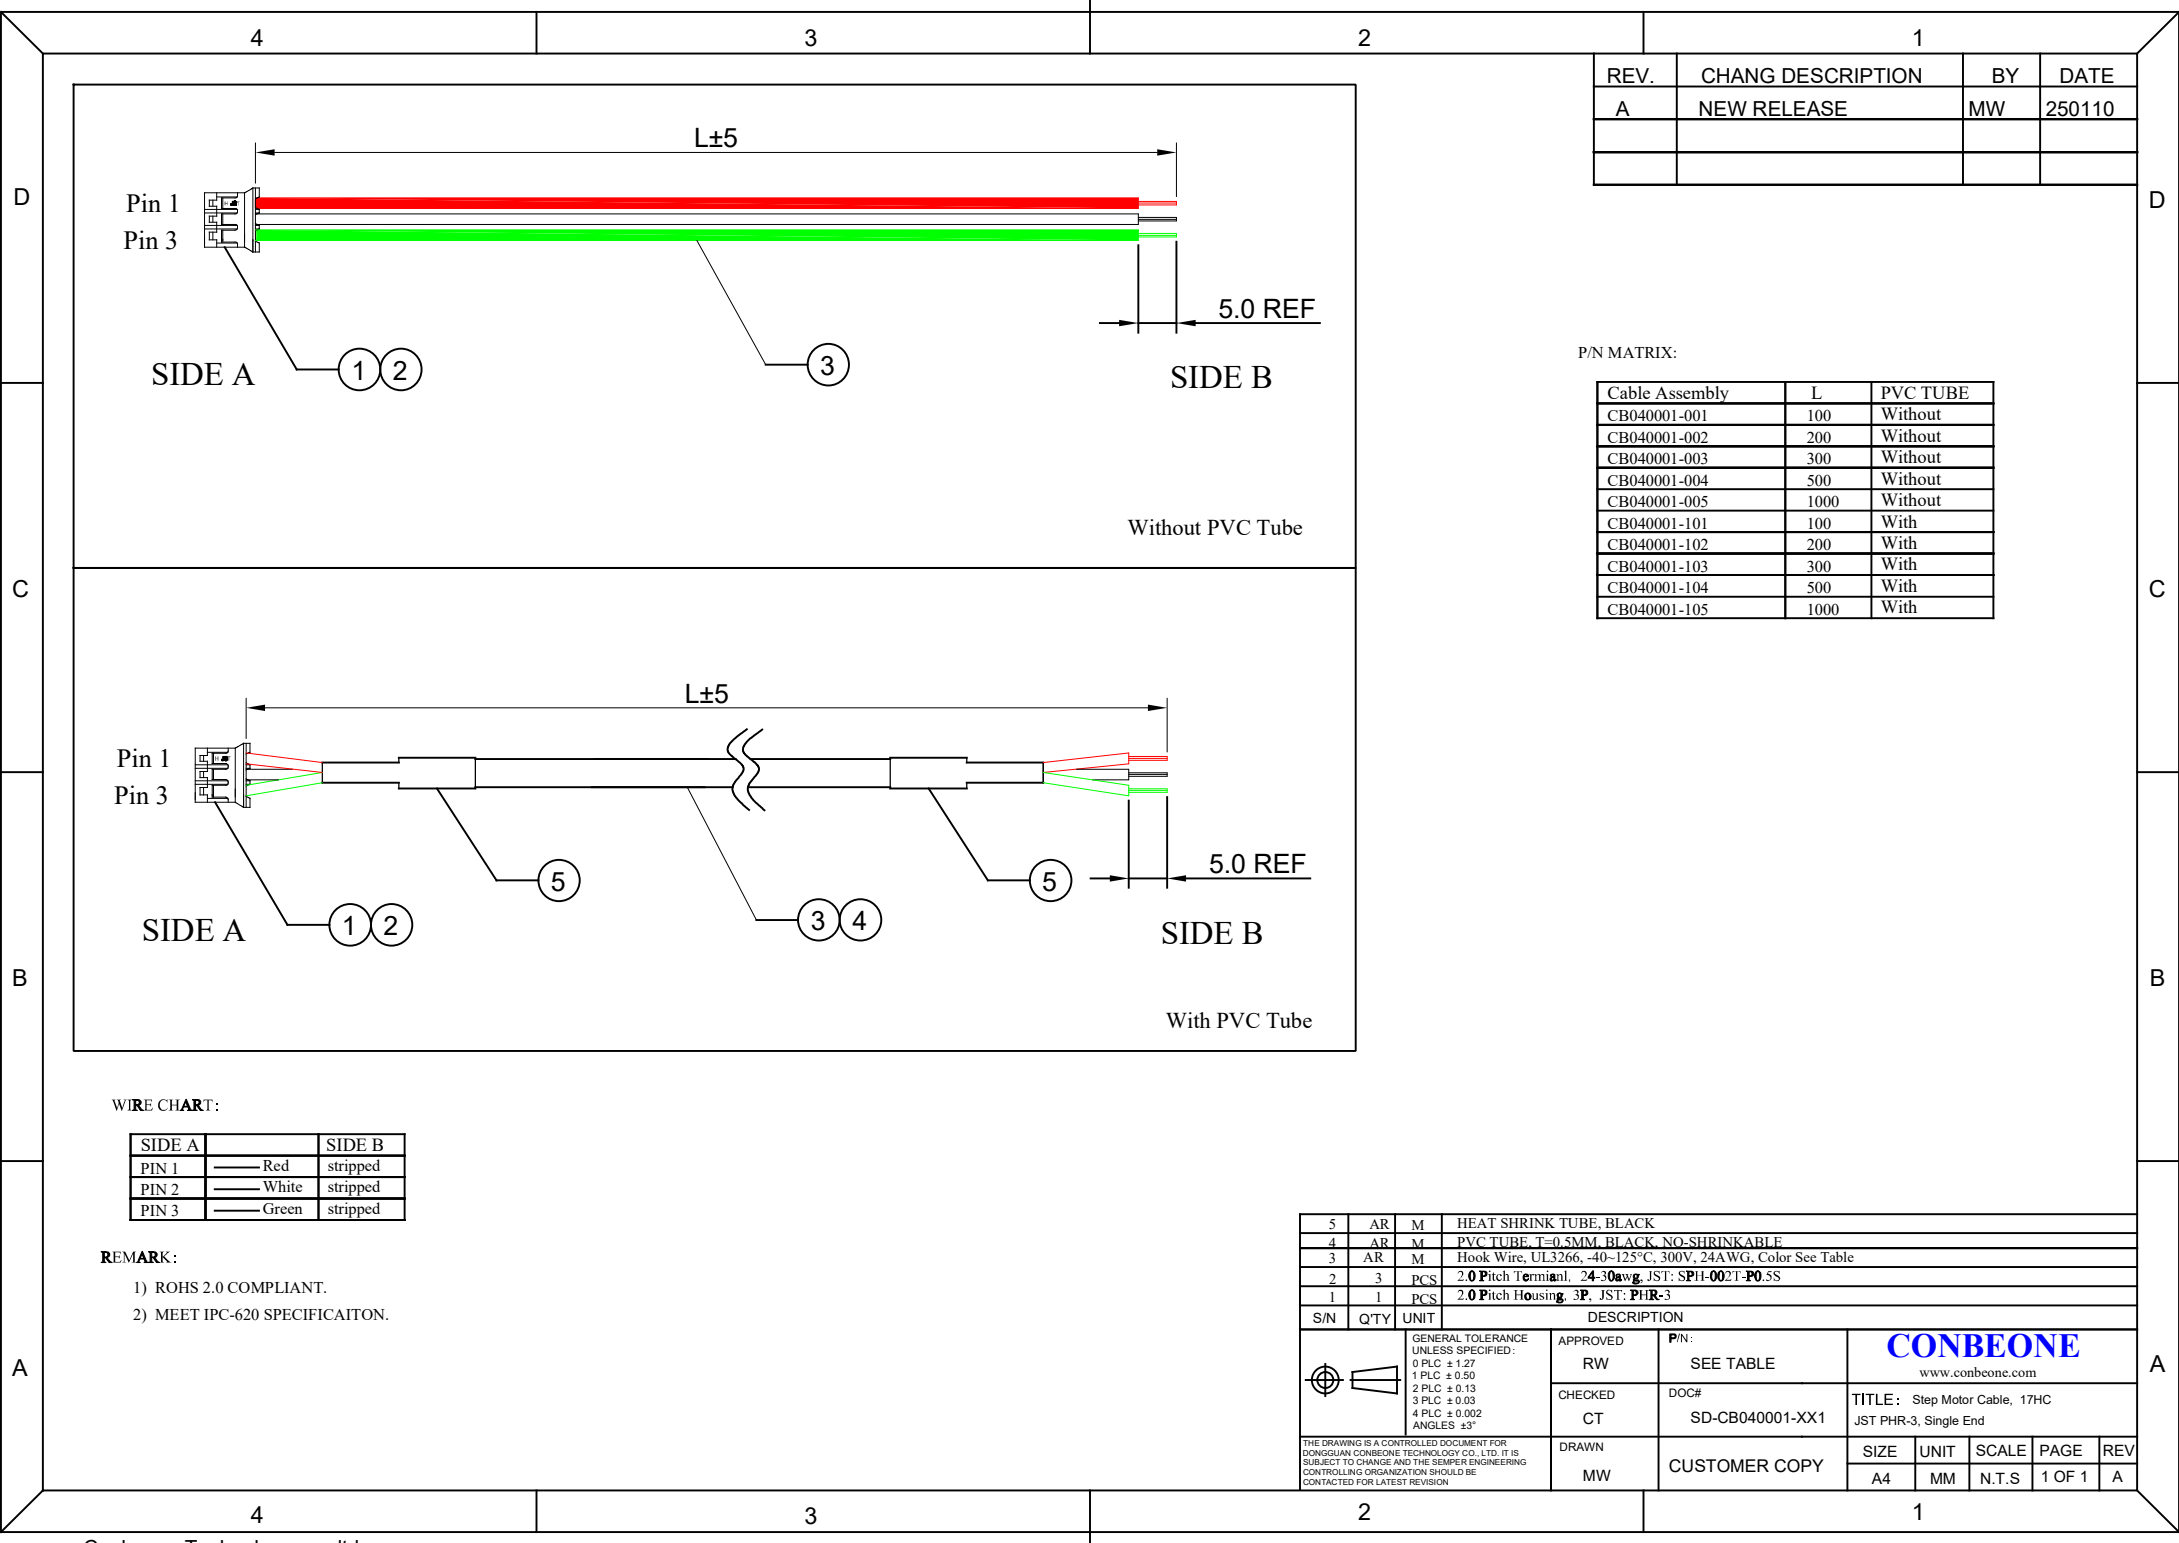

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250110

P/N MATRIX:


Cable Assembly	L	PVC TUBE
CB040001-001	100	Without
CB040001-002	200	Without
CB040001-003	300	Without
CB040001-004	500	Without
CB040001-005	1000	Without
CB040001-101	100	With
CB040001-102	200	With
CB040001-103	300	With
CB040001-104	500	With
CB040001-105	1000	With

WIRE CHART:

SIDE A		SIDE B
PIN 1	Red	stripped
PIN 2	White	stripped
PIN 3	Green	stripped

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICAITON.

5	AR	M	HEAT SHRINK TUBE, BLACK									
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE									
3	AR	M	Hook Wire, UL3266, -40~125°C, 300V, 24AWG, Color See Table									
2	3	PCS	2.0 Pitch Terminal, 24-30awg, JST: SPH-002T-P0.5S									
1	1	PCS	2.0 Pitch Housing, 3P, JST: PHR-3									
S/N	QTY	UNIT	DESCRIPTION									
			GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED PIN: RW SEE TABLE		CONBEONE www.conbeone.com TITLE: Step Motor Cable, 17HC JST PHR-3, Single End					
			CHECKED DOC#		CT SD-CB040001-XX1							
			DRAWN		CUSTOMER COPY							
			MW		A4 MM N.T.S							
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			SIZE		UNIT		SCALE		PAGE		REV	
			A4		MM		N.T.S		1 OF 1		A	