


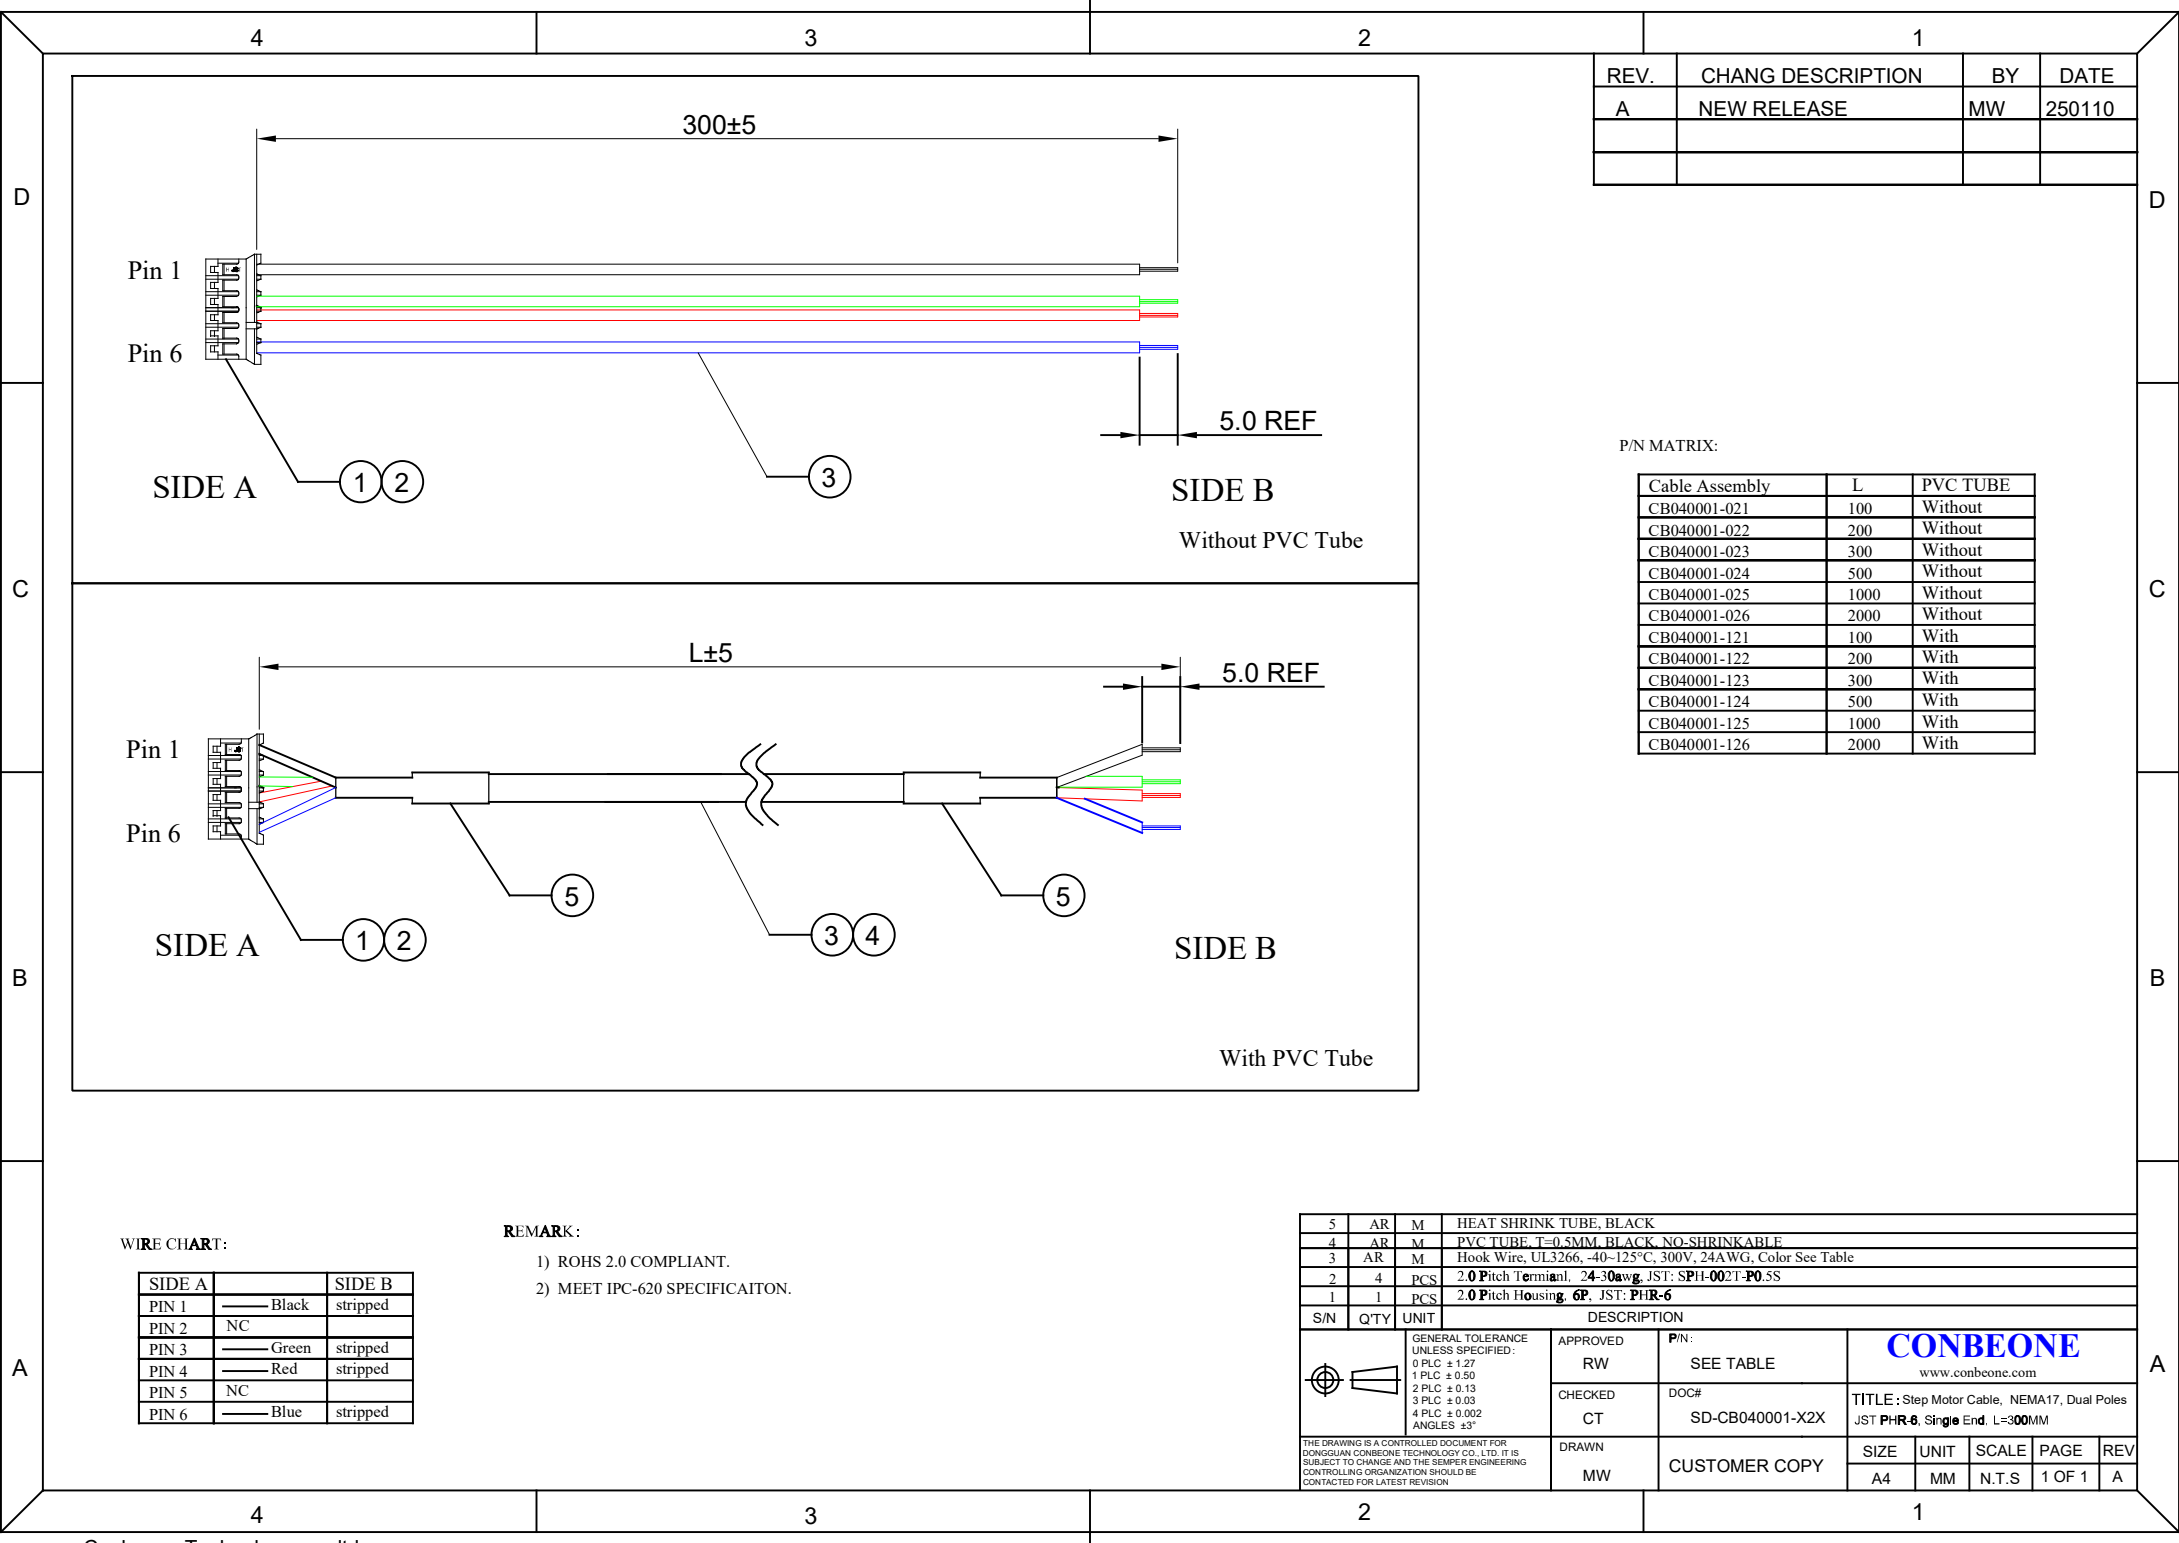

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250110

P/N MATRIX:

Cable Assembly	L	PVC TUBE
CB040001-021	100	Without
CB040001-022	200	Without
CB040001-023	300	Without
CB040001-024	500	Without
CB040001-025	1000	Without
CB040001-026	2000	Without
CB040001-121	100	With
CB040001-122	200	With
CB040001-123	300	With
CB040001-124	500	With
CB040001-125	1000	With
CB040001-126	2000	With

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	stripped
PIN 2	NC	
PIN 3	Green	stripped
PIN 4	Red	stripped
PIN 5	NC	
PIN 6	Blue	stripped

REMARK:

- 1) ROHS 2.0 COMPLIANT.
2) MEET IPC-620 SPECIFICAITON.

5	AR	M	HEAT SHRINK TUBE, BLACK
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE
3	AR	M	Hook Wire, UL3266, -40~125°C, 300V, 24AWG, Color See Table
2	4	PCS	2.0 Pitch Terminal, 24-30awg, JST: SP11-002T-P0.5S
1	1	PCS	2.0 Pitch Housing, 6P, JST: PHR-6
S/N	Q'TY	UNIT	DESCRIPTION
			APPROVED RW SEE TABLE
			CHECKED CT DOCF
			DRAWN MW CUSTOMER COPY
			GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°
			CONBEONE www.conbeone.com
			TITLE: Step Motor Cable, NEMA17, Dual Poles JST PHR-6, Single End, L=300MM
			SIZE A4
			UNIT MM
			SCALE N.T.S
			PAGE 1 OF 1
			REV A