REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250315

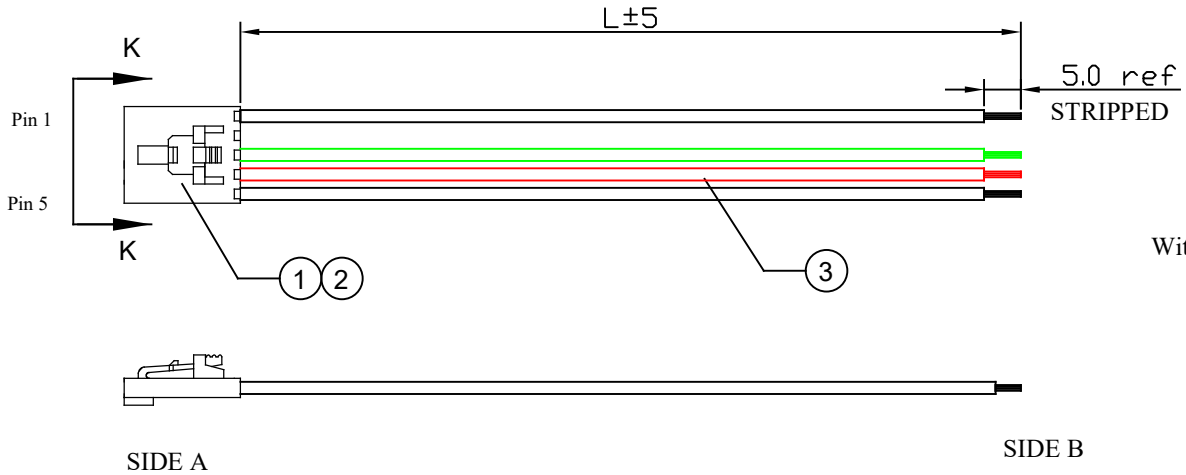

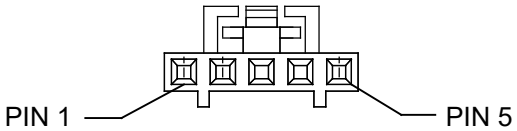

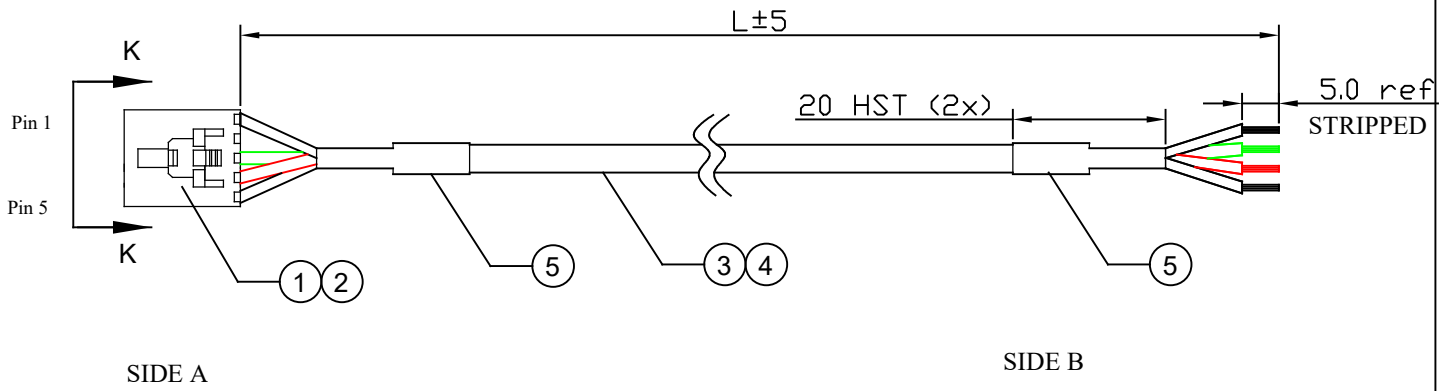

WIRE CHART:

SIDE A		SIDE B
PIN 1	BLACK	Open
PIN 2	NC	
PIN 3	GREEN	Open
PIN 4	RED	Open
PIN 5	WHITE	Open

P/N MATRIX:

Cable Assembly	L	PVC TUBE
CB040004-001	100	Without
CB040004-002	200	Without
CB040004-003	300	Without
CB040004-004	500	Without
CB040004-005	1000	Without
CB040004-101	100	With
CB040004-102	200	With
CB040004-103	300	With
CB040004-104	500	With
CB040004-105	1000	With

S/N	Q'TY	UNIT	DESCRIPTION
5	AR	M	HEAT SHRINK TUBE, BLACK
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE
3	AR	M	UL3266 Hook Wire, 300V, -40~150°C, 22AWG
2	4	PCS	2.54MM PITCH FEMALE TERMINAL, MOLEX 16020086
1	1	PCS	2.54MM PITCH SL RECEPTACBLE HSG, SINGLE ROW,70066, MOLEX 50-57-9405

REMARK:

1) ROHS 2.0 COMPLIANT.
2) MEET IPC-620 SPECIFICAITON.

GENERAL TOLERANCE UNLESS SPECIFIED:
0 PLC ± 1.27
1 PLC ± 0.50
2 PLC ± 0.13
3 PLC ± 0.03
4 PLC ± 0.002
ANGLES ±3°

APPROVED	P/N:	CONBEONE
RW	SEE TABLE	www.conbeone.com
CHECKED	DOC#	TITLE: ATM102 CODER CABLE 50579405 PIGTAIL CABLE
CT	SD-CB040004	
DRAWN	CUSTOMER COPY	
MW		

SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S	1 OF 1	A

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION