
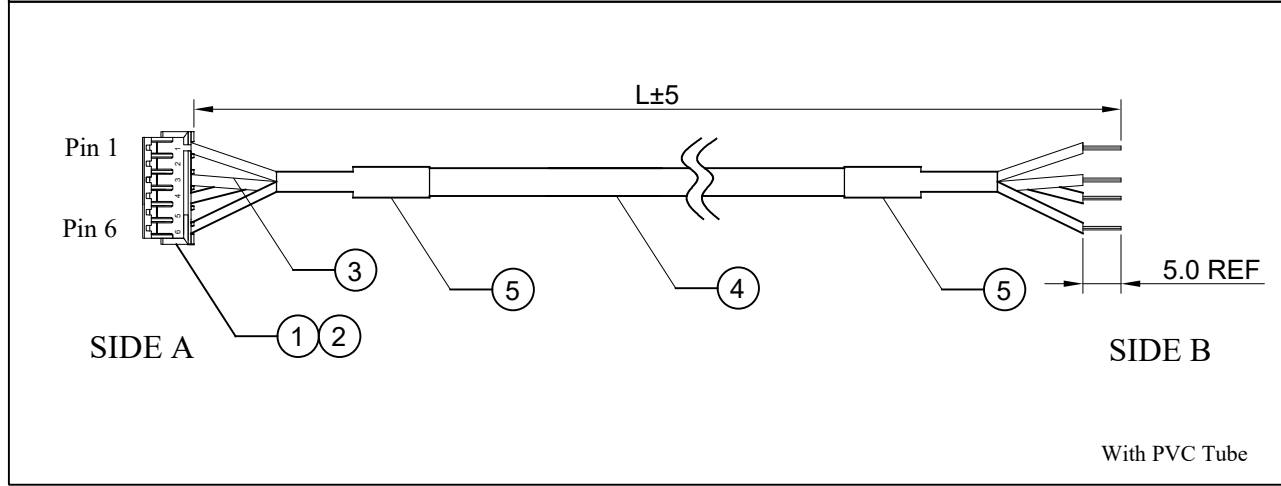


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250116

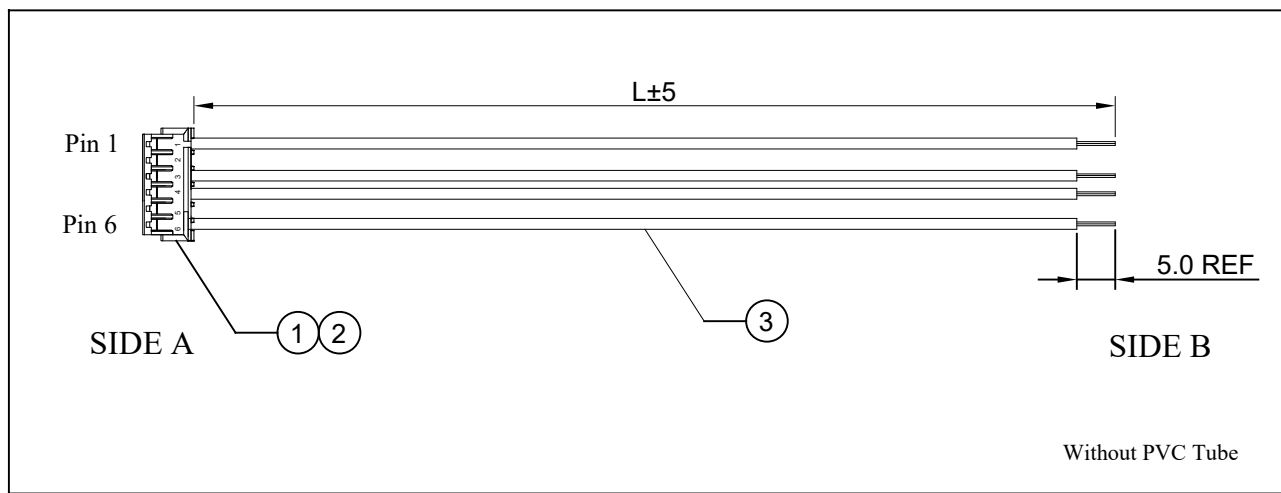

P/N MATRIX:

Cable Assembly	L	PVC TUBE
CB040005-001	100	Without
CB040005-002	200	Without
CB040005-003	300	Without
CB040005-004	500	Without
CB040005-005	1000	Without
CB040005-101	100	With
CB040005-102	200	With
CB040005-103	300	With
CB040005-104	500	With
CB040005-105	1000	With

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	Open
PIN 2	NC	
PIN 3	Green	Open
PIN 4	Red	Open
PIN 5	NC	
PIN 6	Blue	Open

5	AR	M	HEAT SHRINK TUBE, BLACK						
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE						
3	AR	M	Hook Wire, UL1061, -20~80°C, 300V, 26AWG, Color See Table						
2	4	PCS	1.5 Pitch Terminal, 26-28awg, JST: SZH-002T-P0.5						
1	1	PCS	1.5 Pitch Housing, JST: ZHR-6						
S/N	QTY	UNIT	DESCRIPTION						
		GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ±3°		APPROVED	P/N: SEE TABLE				
				CHECKED		DOC#			
		CT	SD-CB040005-X0X		TITLE: Step Motor Cable, NEMA8 JST ZHR-6, Single End				
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.					SIZE	UNIT	SCALE	PAGE	REV
					A4	MM	N.T.S	1 OF 1	A