



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250226

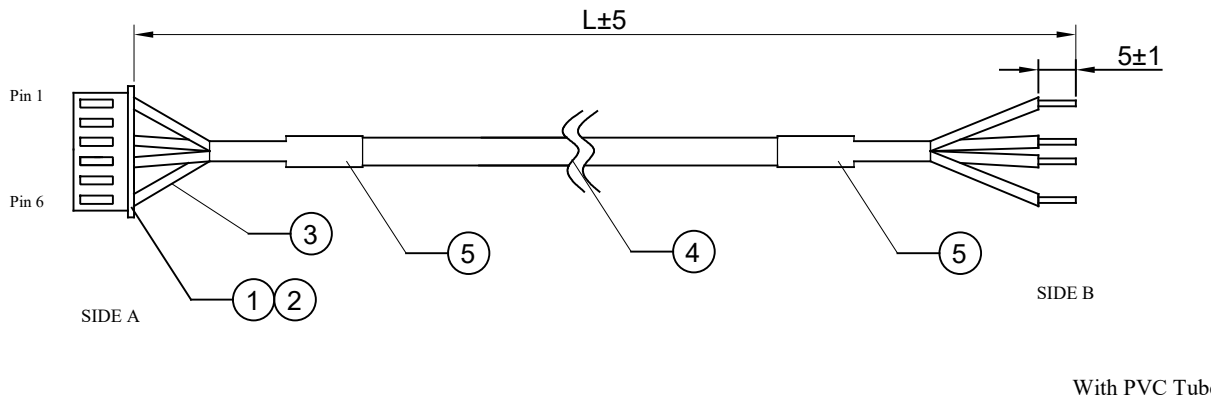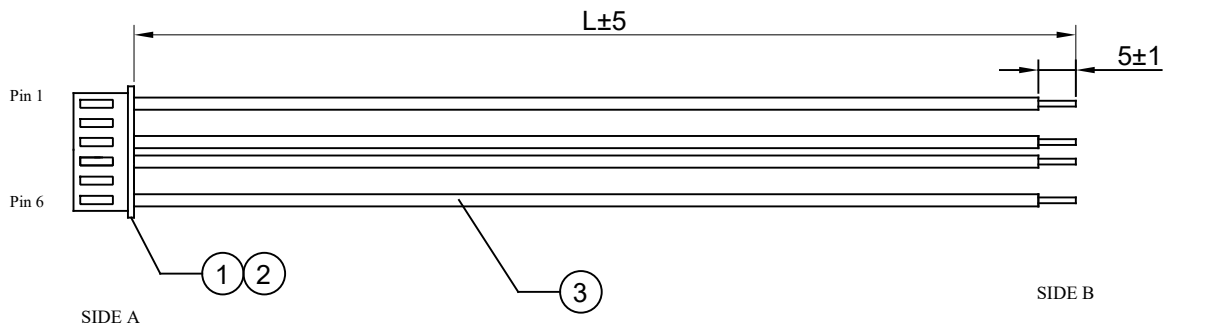

P/N MATRIX:

Cable Assembly	L	PVC TUBE
CB040006-001	100	Without
CB040006-002	200	Without
CB040006-003	300	Without
CB040006-004	500	Without
CB040006-005	1000	Without
CB040006-101	100	With
CB040006-102	200	With
CB040006-103	300	With
CB040006-104	500	With
CB040006-105	1000	With

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	Open
PIN 2	NC	
PIN 3	Green	Open
PIN 4	Red	Open
PIN 5	NC	
PIN 6	Blue	Open

5	AR	M	HEAT SHRINK TUBE, BLACK
4	AR	M	PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE
3	AR	M	UL3266 Hook Wire, 300V, -40~125°C, 22AWG, COLOR SEE TABLE
2	4	PCS	2.5mm PITCH FEMALE TERMINAL, JST: SXH-001T-P0.6
1	1	PCS	2.5mm PITCH RECEPTACLE HOUSING, JST:XHP-6
S/N	Q'TY	UNIT	DESCRIPTION
			APPROVED RW P/N: SEE TABLE
			CHECKED CT DOC# SD-CB040006-X0X
			DRAWN MW CUSTOMER COPY
			SIZE A4
			UNIT MM
			SCALE N.T.S
			PAGE 1 OF 1
			REV A

THE DRAWING IS A CONTROLLED DOCUMENT FOR
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING
CONTROLLING ORGANIZATION SHOULD BE
CONTACTED FOR LATEST REVISION.

4

3

2

1