


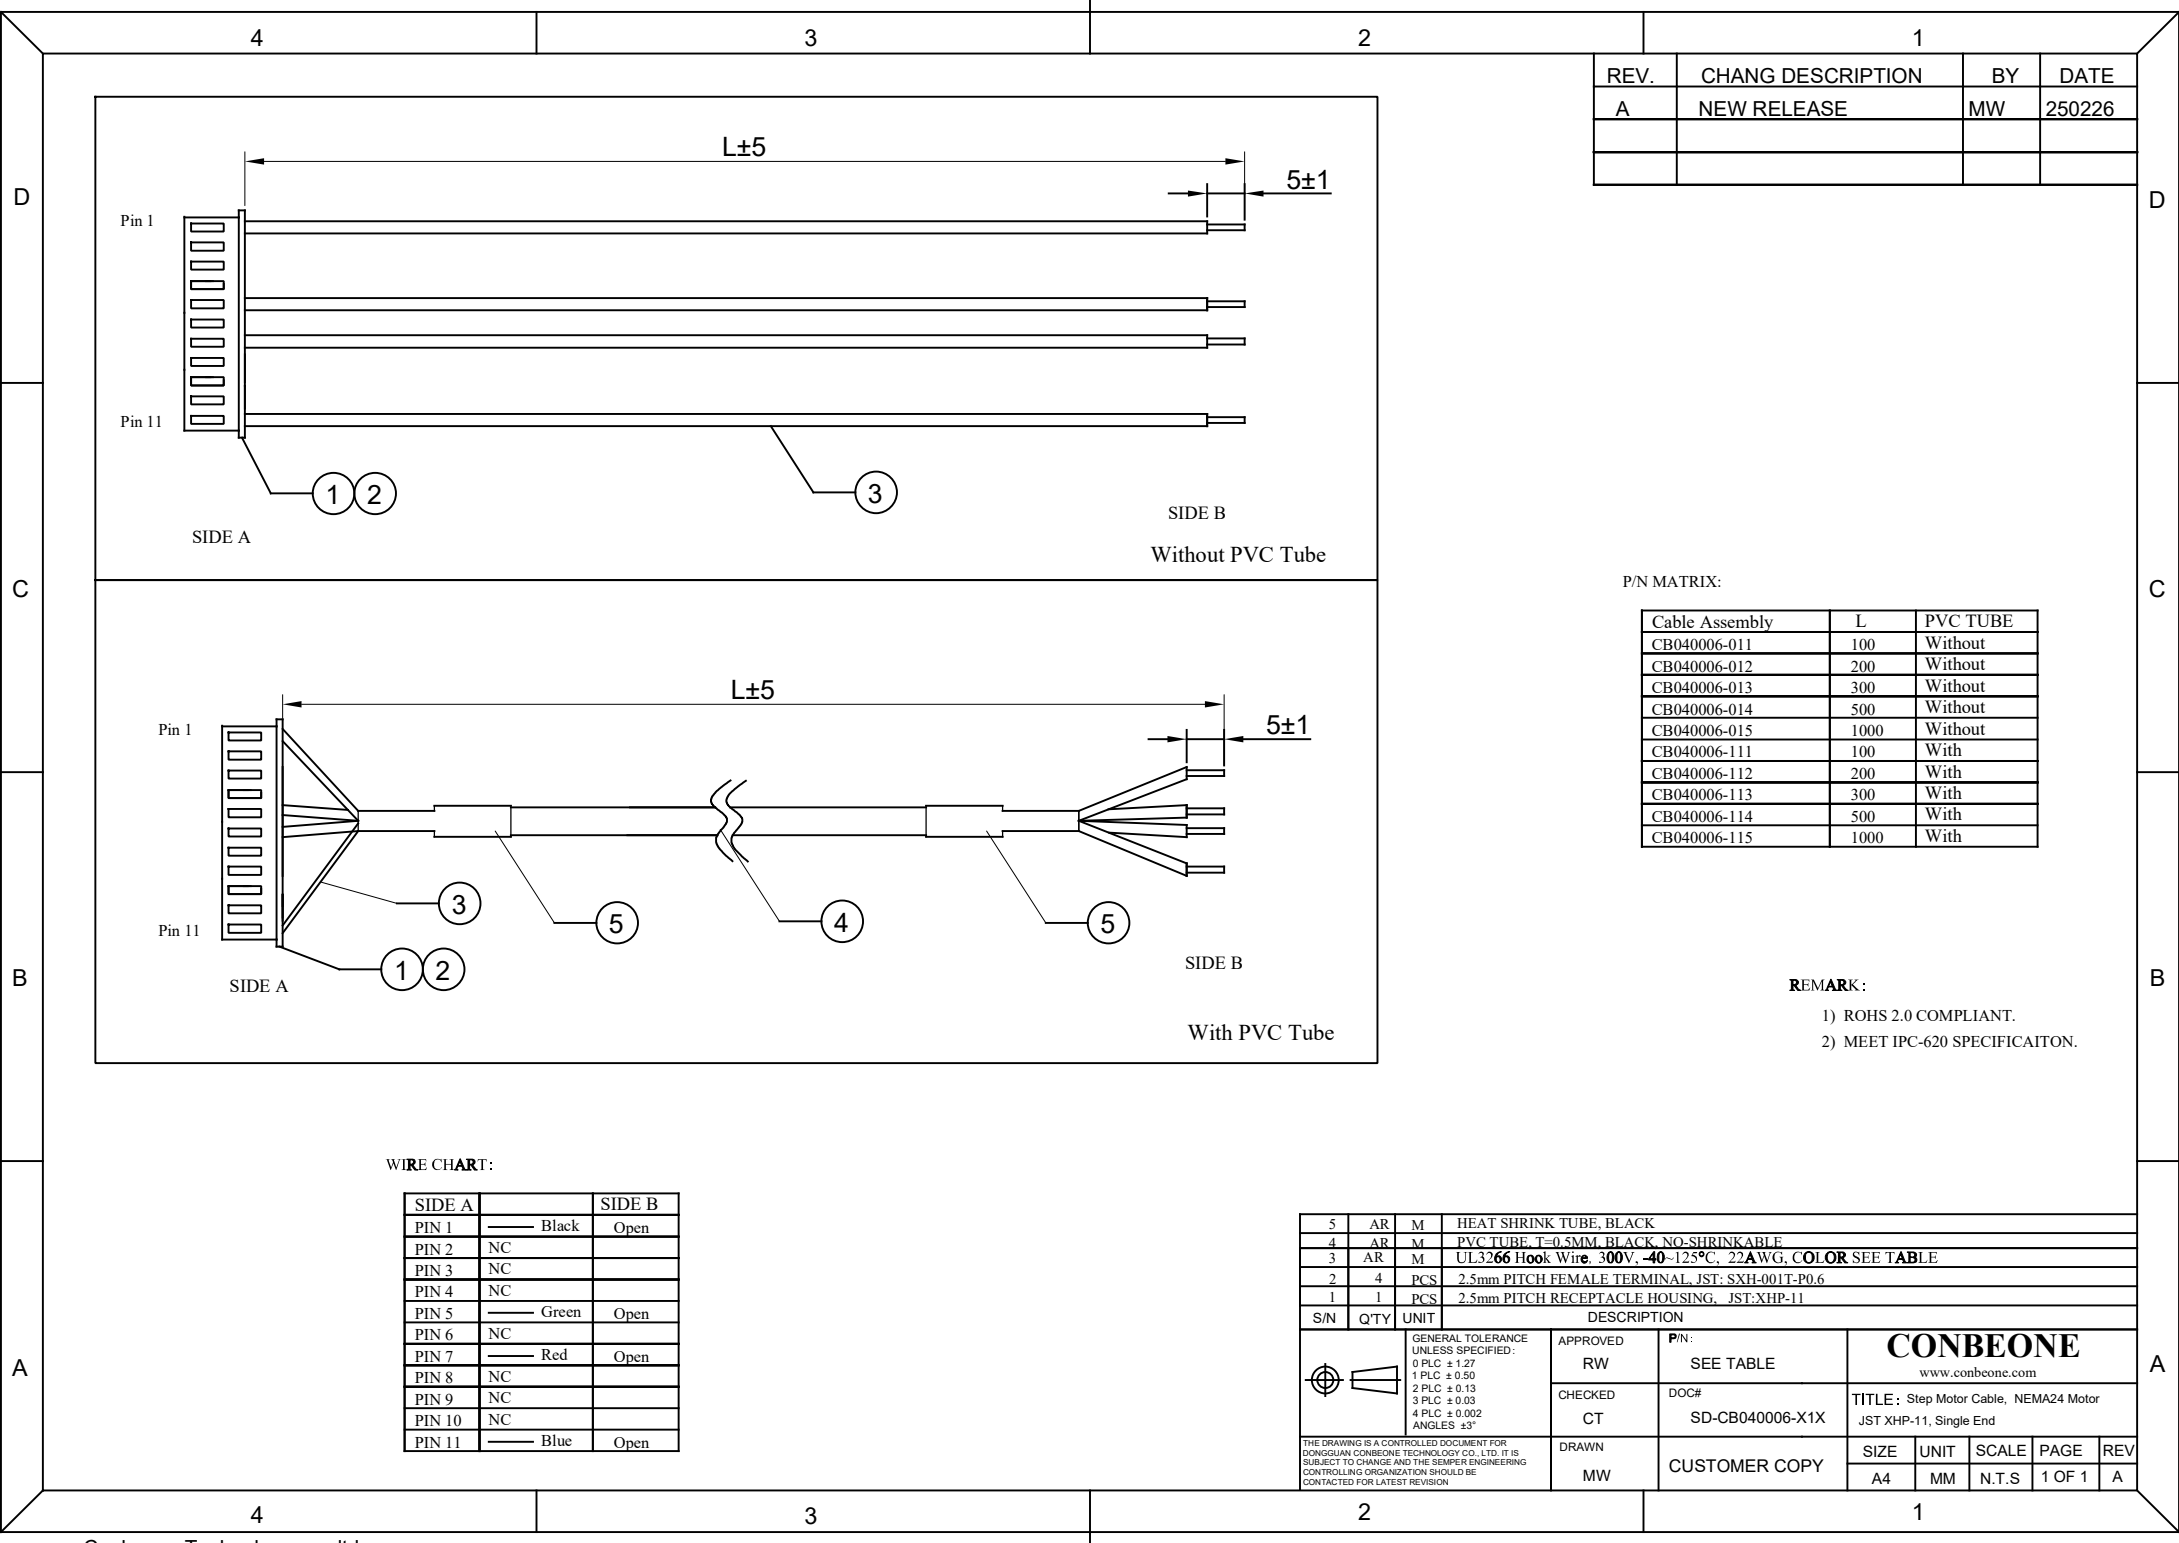

4

3

2

1

REV.

CHANG DESCRIPTION

BY

DATE

A

NEW RELEASE

MW

250226

Pin 1

Pin 11

1

2

3

5±1

L±5

SIDE A

SIDE B

Without PVC Tube

Pin 1

Pin 11

1

2

3

4

5

5±1

L±5

SIDE A

SIDE B

With PVC Tube

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	Open
PIN 2	NC	
PIN 3	NC	
PIN 4	NC	
PIN 5	Green	Open
PIN 6	NC	
PIN 7	Red	Open
PIN 8	NC	
PIN 9	NC	
PIN 10	NC	
PIN 11	Blue	Open

5

AR

M

HEAT SHRINK TUBE, BLACK

4

AR

M

PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE

3

AR

M

UL3266 Hook Wire, 300V, -40~125°C, 22AWG, COLOR SEE TABLE

2

4

PCS

2.5mm PITCH FEMALE TERMINAL, JST: SXH-001T-P0.6

1

1

PCS

2.5mm PITCH RECEPTACLE HOUSING, JST:XHP-11

S/N

Q'TY

UNIT

DESCRIPTION

APPROVED

RW

PIN:

SEE TABLE

CHECKED

CT

DOC#

SD-CB040006-X1X

DRAWN

MW

CUSTOMER COPY

SIZE

UNIT

SCALE

PAGE

REV

A4

MM

N.T.S

1 OF 1

A

GENERAL TOLERANCE UNLESS SPECIFIED:

0 PLC ±1.27

1 PLC ±0.50

2 PLC ±0.13

3 PLC ±0.03

4 PLC ±0.002

ANGLES ±3°

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.

CONBEONE

www.conbeone.com

TITLE: Step Motor Cable, NEMA24 Motor JST XHP-11, Single End

1

4

3

2

1

REV.

CHANG DESCRIPTION

BY

DATE

A

NEW RELEASE

MW

250226

Pin 1

Pin 11

1

2

3

5±1

L±5

SIDE A

SIDE B

Without PVC Tube

Pin 1

Pin 11

1

2

3

4

5

5±1

L±5

SIDE A

SIDE B

With PVC Tube

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	Open
PIN 2	NC	
PIN 3	NC	
PIN 4	NC	
PIN 5	Green	Open
PIN 6	NC	
PIN 7	Red	Open
PIN 8	NC	
PIN 9	NC	
PIN 10	NC	
PIN 11	Blue	Open

5

AR

M

HEAT SHRINK TUBE, BLACK

4

AR

M

PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE

3

AR

M

UL3266 Hook Wire, 300V, -40~125°C, 22AWG, COLOR SEE TABLE

2

4

PCS

2.5mm PITCH FEMALE TERMINAL, JST: SXH-001T-P0.6

1

1

PCS

2.5mm PITCH RECEPTACLE HOUSING, JST:XHP-11

S/N

Q'TY

UNIT

DESCRIPTION

APPROVED

RW

PIN:

SEE TABLE

CHECKED

CT

DOC#

SD-CB040006-X1X

DRAWN

MW

CUSTOMER COPY

SIZE

UNIT

SCALE

PAGE

REV

A4

MM

N.T.S

1 OF 1

A

GENERAL TOLERANCE UNLESS SPECIFIED:

0 PLC ±1.27

1 PLC ±0.50

2 PLC ±0.13

3 PLC ±0.03

4 PLC ±0.002

ANGLES ±3°

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.

CONBEONE

www.conbeone.com

TITLE: Step Motor Cable, NEMA24 Motor JST XHP-11, Single End

1

4

3

2

1

REV.

CHANG DESCRIPTION

BY

DATE

A

NEW RELEASE

MW

250226

Pin 1

Pin 11

1

2

3

5±1

L±5

SIDE A

SIDE B

Without PVC Tube

Pin 1

Pin 11

1

2

3

4

5

5±1

L±5

SIDE A

SIDE B

With PVC Tube

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	Open
PIN 2	NC	
PIN 3	NC	
PIN 4	NC	
PIN 5	Green	Open
PIN 6	NC	
PIN 7	Red	Open
PIN 8	NC	
PIN 9	NC	
PIN 10	NC	
PIN 11	Blue	Open

5

AR

M

HEAT SHRINK TUBE, BLACK

4

AR

M

PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE

3

AR

M

UL3266 Hook Wire, 300V, -40~125°C, 22AWG, COLOR SEE TABLE

2

4

PCS

2.5mm PITCH FEMALE TERMINAL, JST: SXH-001T-P0.6

1

1

PCS

2.5mm PITCH RECEPTACLE HOUSING, JST:XHP-11

S/N

Q'TY

UNIT

DESCRIPTION

APPROVED

RW

PIN:

SEE TABLE

CHECKED

CT

DOC#

SD-CB040006-X1X

DRAWN

MW

CUSTOMER COPY

SIZE

UNIT

SCALE

PAGE

REV

A4

MM

N.T.S

1 OF 1

A

GENERAL TOLERANCE UNLESS SPECIFIED:

0 PLC ±1.27

1 PLC ±0.50

2 PLC ±0.13

3 PLC ±0.03

4 PLC ±0.002

ANGLES ±3°

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.

CONBEONE

www.conbeone.com

TITLE: Step Motor Cable, NEMA24 Motor JST XHP-11, Single End

1

4

3

2

1

REV.

CHANG DESCRIPTION

BY

DATE

A

NEW RELEASE

MW

250226

Pin 1

Pin 11

1

2

3

5±1

L±5

SIDE A

SIDE B

Without PVC Tube

Pin 1

Pin 11

1

2

3

4

5

5±1

L±5

SIDE A

SIDE B

With PVC Tube

WIRE CHART:

SIDE A		SIDE B
PIN 1	Black	Open
PIN 2	NC	
PIN 3	NC	
PIN 4	NC	
PIN 5	Green	Open
PIN 6	NC	
PIN 7	Red	Open
PIN 8	NC	
PIN 9	NC	
PIN 10	NC	
PIN 11	Blue	Open

5

AR

M

HEAT SHRINK TUBE, BLACK

4

AR

M

PVC TUBE, T=0.5MM, BLACK, NO-SHRINKABLE

3

AR

M

UL3266 Hook Wire, 300V, -40~125°C, 22AWG, COLOR SEE TABLE

2

4

PCS

2.5mm PITCH FEMALE TERMINAL, JST: SXH-001T-P0.6

1

1

PCS

2.5mm PITCH RECEPTACLE HOUSING, JST:XHP-11

S/N

Q'TY

UNIT

DESCRIPTION

APPROVED

RW

PIN:

SEE TABLE

CHECKED

CT

DOC#

SD-CB040006-X1X

DRAWN

MW

CUSTOMER COPY

SIZE

UNIT

SCALE

PAGE

REV

A4

MM

N.T.S

1 OF 1

A

GENERAL TOLERANCE UNLESS SPECIFIED:

0 PLC ±1.27

1 PLC ±0.50

2 PLC ±0.13

3 PLC ±0.03

4 PLC ±0.002

ANGLES ±3°

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.

CONBEONE

www.conbeone.com

TITLE: Step Motor Cable, NEMA24 Motor JST XHP-11, Single End

1