


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	25/01/06

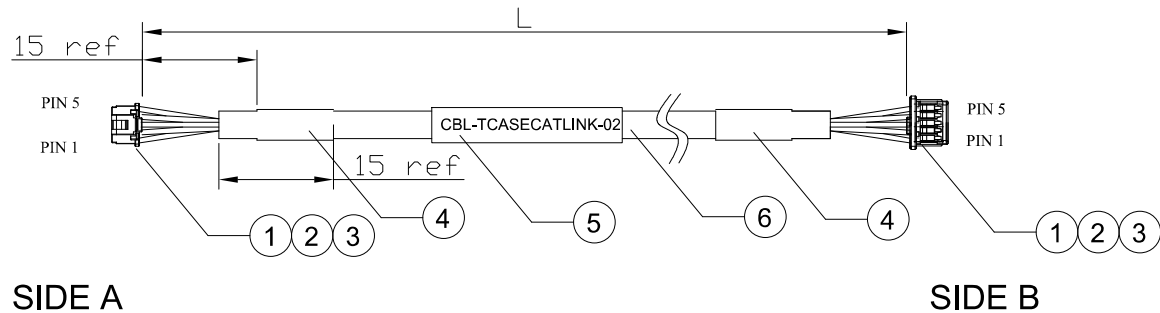

REMARK:
 1) ROHS 2.0 COMPLIANT.
 2) MEET IPC-620 SPECIFICATION.
 3) 100% OPEN/SHORT TEST.

ASSY P/N	L(MM)	Tolerance	LABEL
CB040010-001	100	±5	CBL-TCASECATLINK-01 CB040010-001 CONBEONE
CB040010-002	200	±5	CBL-TCASECATLINK-02 CB040010-002 CONBEONE
CB040010-003	300	±10	CBL-TCASECATLINK-03 CB040010-003 CONBEONE
CB040010-004	500	±10	CBL-TCASECATLINK-04 CB040010-004 CONBEONE
CB040010-005	1000	±15	CBL-TCASECATLINK-05 CB040010-005 CONBEONE

EQUIVALENT TO ELMO CBL-GTWIECATLINK01

WIRE CHART

SIDE A	WIRE SPEC	SIDE B	Function for Ethercat
Pin #1	WHITE	Pin #1	ECAT TX+
Pin #2	GREEN	Pin #2	ECAT TX-
Pin #3	RED	Pin #3	ECAT RX+
Pin #4	YELLOW	Pin #4	ECAT RX-
Pin #5	DRAWIN	Pin #5	SHIELD

地线两头加热缩管打端子，连接在两头的5013300500的第5P

S/N	Q'TY	UNIT	DESCRIPTION
6	AR	M	UL2464, 28*2P+DRAIN+AB+JACKED, OD=5.0, BLACK
5	0.04	M	HST, WHITE, 印字
4	0.03	M	HST, BLACK
3	0.03	M	HST, BLACK
2	10	PCS	501193-7000, TERMINAL, 1.0MM PITHC, GOLD PLATED
1	2	PCS	501939-0500, 5PIN HOUSING.1.0MM PITCH, WITH POSITIVE LOCK

GENERAL TOLERANCE UNLESS SPECIFIED:		APPROVED	P/N:
0	PLC ±1.27	RW	SEE TABLE
1	PLC ±0.50	CHECKED	DOC#
2	PLC ±0.13	CT	SD-CB040010-0
3	PLC ±0.03	DRAWN	CUSTOMER COPY
4	PLC ±0.002	MW	
ANGLES ±3°			

		<p>CONBEONE www.conbeone.com</p>				
				<p>TITLE: Titanium Solo Castanet/Lizard Cable Ethercat Link Cable</p>		
<p>THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.</p>		SIZE	UNIT	SCALE	PAGE	REV
		A4	MM	N.T.S	1 OF 1	A