


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	26/04/24

LABEL 1 CONTENT:

CBL-TCASSTO01-1
CB040010-300 CONBEONE

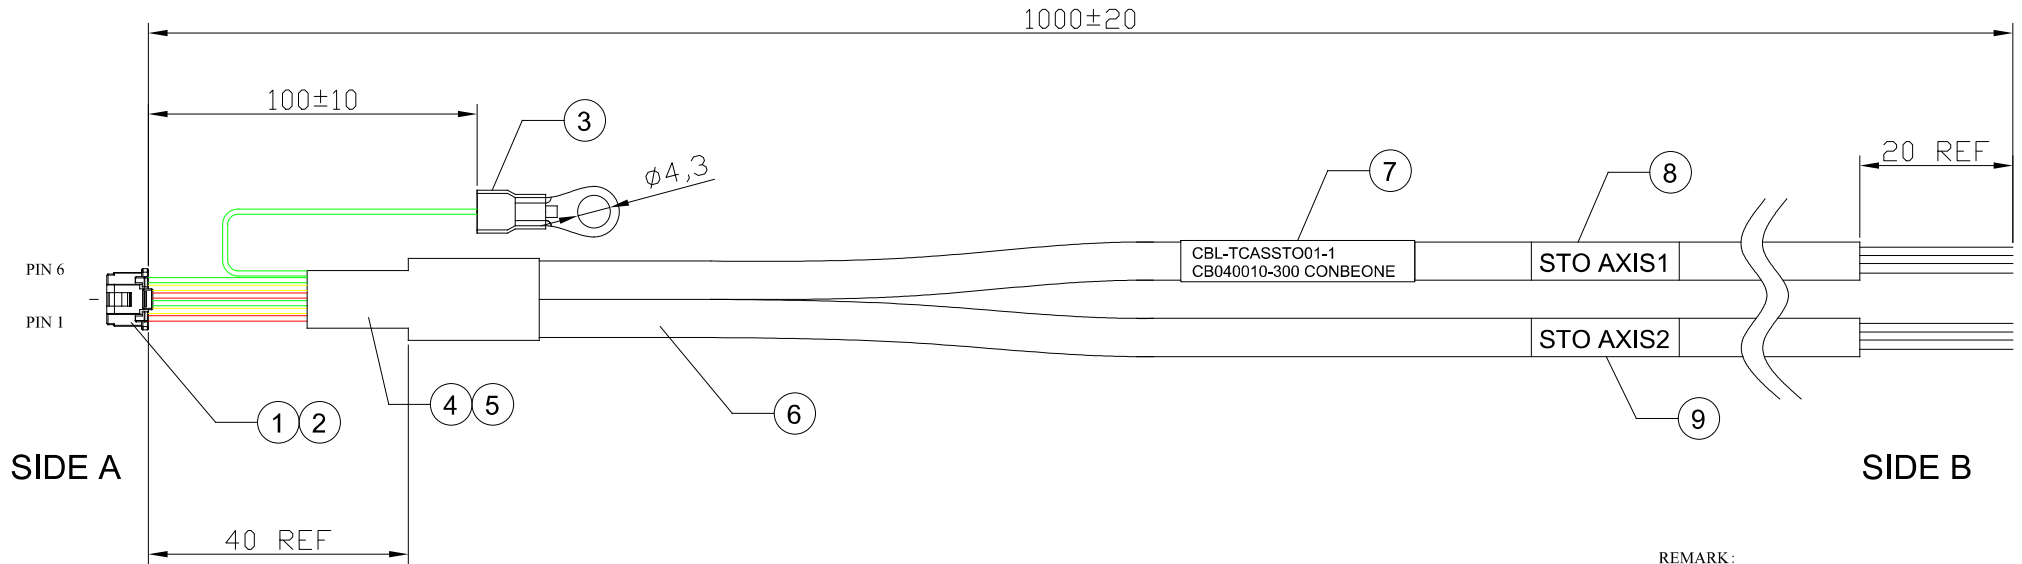

REMARK:
1) ROHS 2.0 COMPLIANT.
2) MEET IPC-620 SPECIFICATION.
3) 100% OPEN/SHORT TEST.

EQUIVALENT TO ELMO CBL-TCASSTO01-1

WIRE CHART

SIDE A	WIRE SPEC	SIDE B	Function for CAN
Pin #1	RED	OPEN	X1 STO1 INPUT
Pin #2	YELLOW	OPEN	X1 STO2 INPUT
Pin #3	GREEN	OPEN	X1 STO1 信号回流
	GREEN WHITE	OPEN	X1 STO2 信号回流
Pin #4	RED	OPEN	X2 STO1 INPUT
Pin #5	YELLOW	OPEN	X2 STO2 INPUT
Pin #6	GREEN	OPEN	X2 STO1 信号回流
	GREEN WHITE	OPEN	X2 STO2 信号回流
M4圆环端子	屏蔽	OPEN	X1线接地
	屏蔽	OPEN	X2线接地

STO AXIS1

STO AXIS2

- 每根线的白色和绿色线合并在一起接一根绿色线，分别引入到PIN 3和PIN 6。
- 两根线的屏蔽合并后连接绿色线再接M4圆环端子。
- 每根线的尾端去外被20mm，编织翻过来用美纹纸固定在线上。
- PIN 1~3是一条线，PIN 4~6是一条线。不要混了。

QTY	UNIT	DESCRIPTION
9	PCS	HST, 白色, 超薄, 印字
8	PCS	HST, 白色, 超薄, 印字
7	PCS	HST, 白色, 超薄, 印字
6	M	UL2464, 28*2P+DRAIN+AB+JACKED, OD=5.0, BLACK
5	0.04	M HST, 小, 保护焊点
4	0.03	M HST, BLACK
3	1	PCS M4圆环端子
2	6	PCS 501193-7000, TERMINAL, 1.0MM PITHC, GOLD PLATED
1	1	PCS 5013300600, 6PIN HOUSING.1.0MM PITCH, WITH POSITIVE LOCK

S/N	Q'TY	UNIT	DESCRIPTION					
	APPROVED	RW	P/N:	CB040010-300				
	CHECKED	CT	DOCH#	SD-CB040010-300				
DRAWN	MW	CUSTOMER COPY	TITLE:	SIZE	UNIT	SCALE	PAGE	REV
			Titanium Solo Castanel/Lizard Cable STO Cable (J34)					
			A4	MM	N.T.S	1 OF 1	A	

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.