


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	26/04/24

LABEL CONTENT:

CBL-TCASVL01-1
CB040010-400 CONBEONE

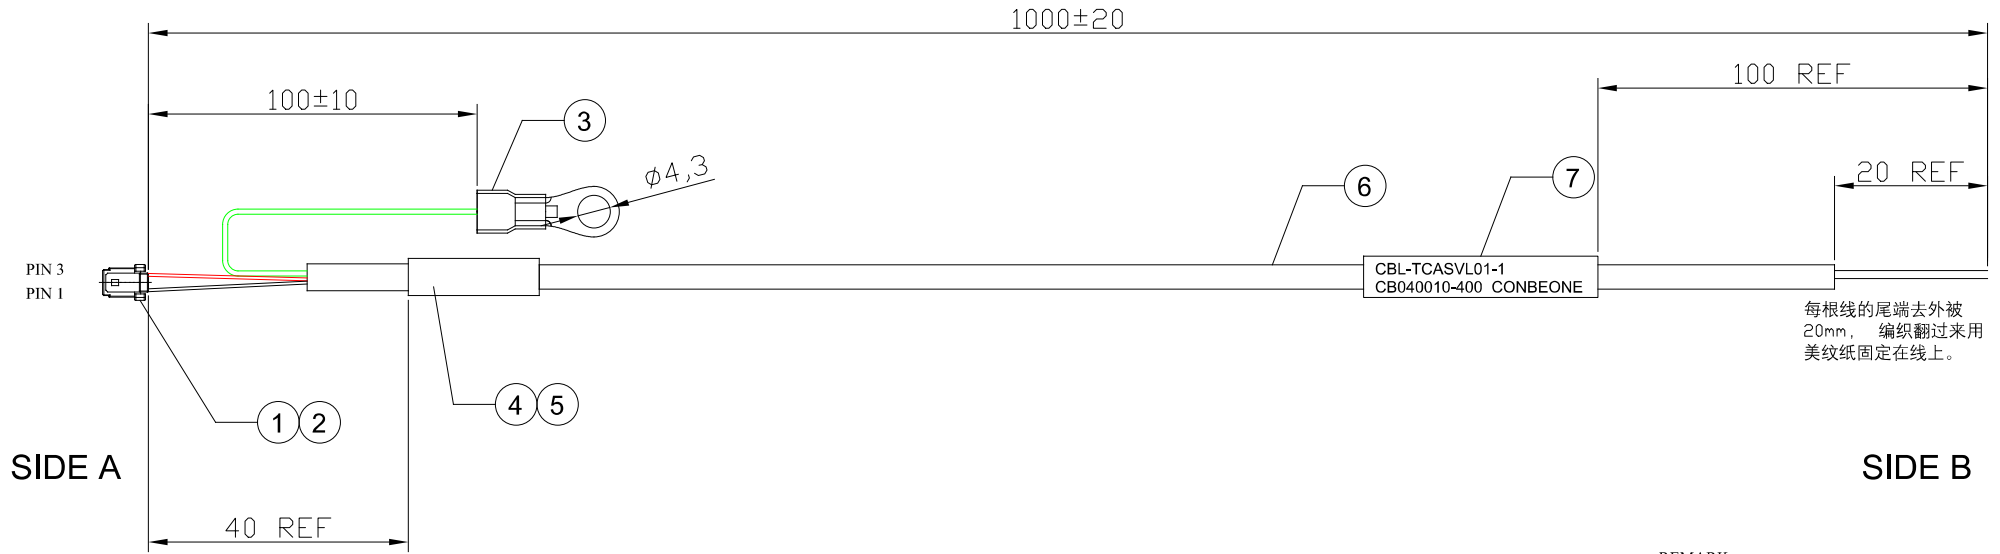

每根线的尾端去外被
20mm, 编织翻过来用
美纹纸固定在线上。

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.
- 3) 100% OPEN/SHORT TEST.

EQUIVALENT TO ELMO CBL-TCASVL01-1

WIRE CHART

SIDE A	WIRE SPEC	SIDE B	Function for CAN
Pin #1	BLACK	OPEN	VL-
Pin #2	NC		
Pin #3	RED	OPEN	VL+
M4圆环端子	DRAIN	OPEN	接地

1. 地线和屏蔽连接绿色线再接M4圆环端子。
2. 每根线的尾端去外被20mm, 编织翻过来用美纹纸固定在线上。

7	1	PCS	HST, 白色, 超薄, 印字
6	1	M	UL2464, 28*1P+DRAIN+AB+JACKED, OD=3.2, BLACK, CBL2464-28-001
5	0.04	M	HST, 小, 保护焊点
4	0.03	M	HST, BLACK
3	1	PCS	M4圆环端子
2	2	PCS	501193-7000, TERMINAL, 1.0MM PITHC, GOLD PLATED
1	1	PCS	5019390300, 3PIN HOUSING.1.0MM PITCH, WITH POSITIVE LOCK
S/N	Q'TY	UNIT	DESCRIPTION
	GENERAL TOLERANCE UNLESS SPECIFIED:		APPROVED P/N:
	0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ± 3°		RW CB040010-400 www.conbeone.com
		CHECKED CT	DOCH# SD-CB040010-400 TITLE: Titanium Solo Castanel/Lizard Cable VL Cable, P2
		DRAWN MW	CUSTOMER COPY
SIZE	UNIT	SCALE	PAGE
A4	MM	N.T.S	1 OF 1
REV	A		

THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.