
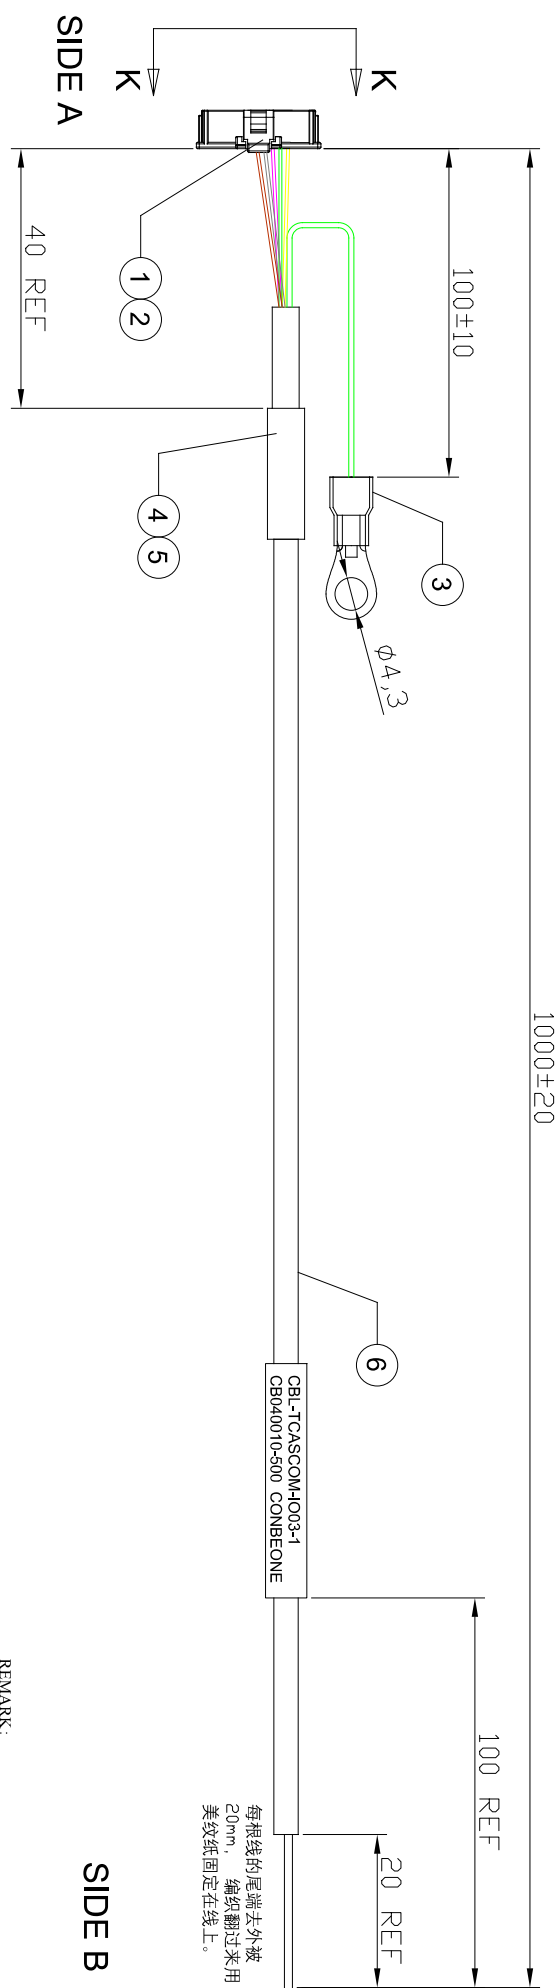


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	26/04/24

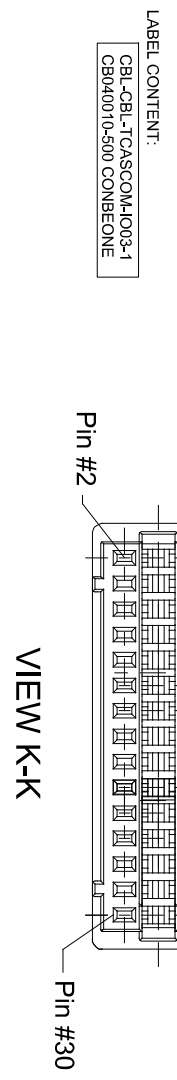

每根线的尾端去外被
20mm, 编织翻过来用
美纹纸固定在在线上。

- REMARK:
- 1) ROHS 2.0 COMPLIANT.
 - 2) MEET IPC-620 SPECIFICATION.
 - 3) 100% OPENS/SHORT TEST.

EQUIVALENT TO ELMO CBL-TCASCOM-H003-1

WIRE CHART

SIDE A	WIRE SPEC	SIDE B	Function for CAN
Pin #8	YELLOW	OPEN	MAIN_RS-422_TX-
Pin #10	GREEN	OPEN	MAIN_RS-422_TX+
Pin #12	PURPLE	OPEN	MAIN_RS-422_RX-
Pin #14	GRAY	OPEN	MAIN_RS-422_RX+
Pin #16	BROWN	OPEN	COMRET
其它P	NC	OPEN	VL+
M4圆环端子	WHITE	OPEN	接地

1. 地线和屏蔽连接绿色线再接M4圆环端子。
2. 每根线的尾端去外被20mm, 编织翻过来用美纹纸固定在在线上。芯线半剥3.0mm

7	1	PCS	HST, 白色, 超薄, 印字
6	1	M	UL2464, 28*3P+DRAIN+AB+JACKED, OD=4.0, BLACK, CBL2464-28-002
5	0.04	M	HST, 小, 保护焊点
4	0.03	M	HST, BLACK
3	1	PCS	M4圆环端子
2	5	PCS	50T193-7000, TERMINAL, 1.0MM PITCH, GOLD PLATED
1	1	PCS	50T1893010, 30PIN HOUSING, 1.0MM PITCH, WITH POSITIVE LOCK

GENERAL TOLERANCE	APPROVED	DESCRIPTION
9 H.C. ± 0.127	RW	P/N: CB040010-500
2 H.C. ± 0.13	CHECKED	DOCP# SD-CB040010-500
3 H.C. ± 0.03	CT	
4 H.C. ± 0.002	MW	CUSTOMER COPY
ANGLES 3P		

THE DRAWING IS A CONTROLLED DOCUMENT FOR THE PRODUCT. ANY CHANGES TO THE DRAWING MUST BE SUBJECT TO CHANGE AND THE SENIOR ENGINEERING DEPARTMENT MUST BE NOTIFIED AND APPROVED FOR ANY CHANGES TO BE MADE.

SIZE	UNIT	SCALE	PAGE	REV
A4	MM	N.T.S.	1 OF 1	A

CONBEONE
www.conbeone.com

TITLE: Titanium Solo Castanet/Lizard Cable
MAIN RS-422 Cable for Regular IO