
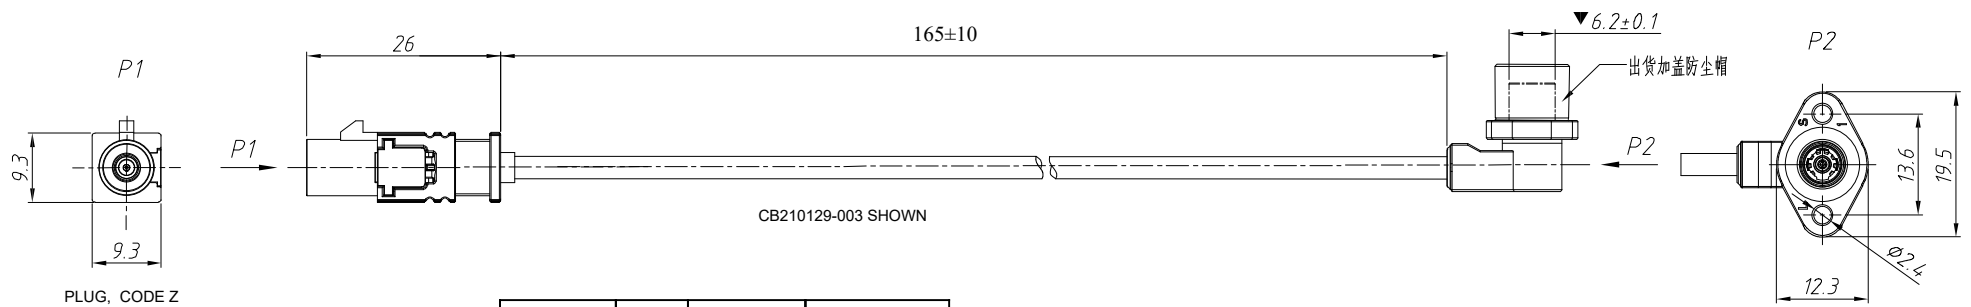
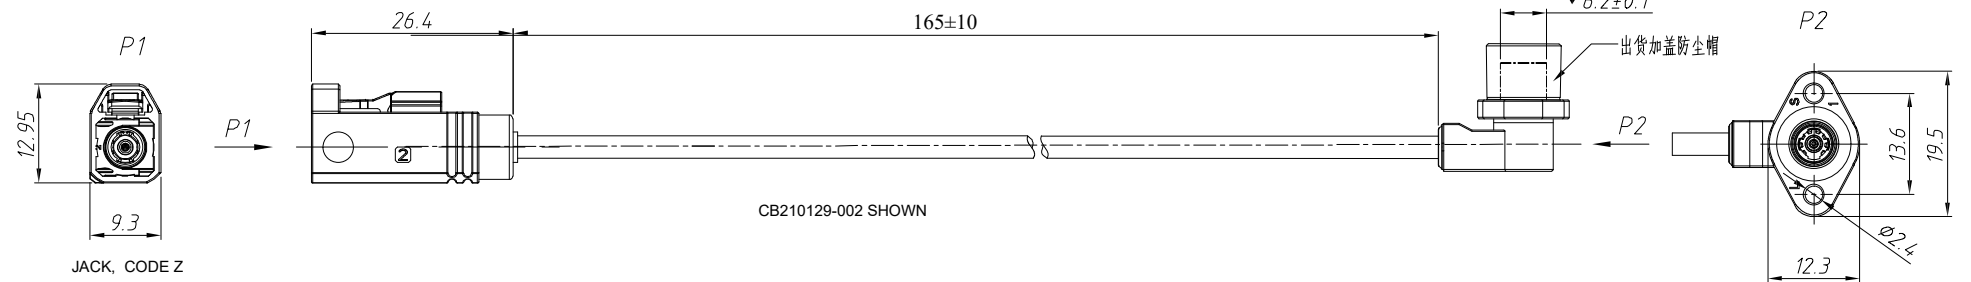



REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	221103

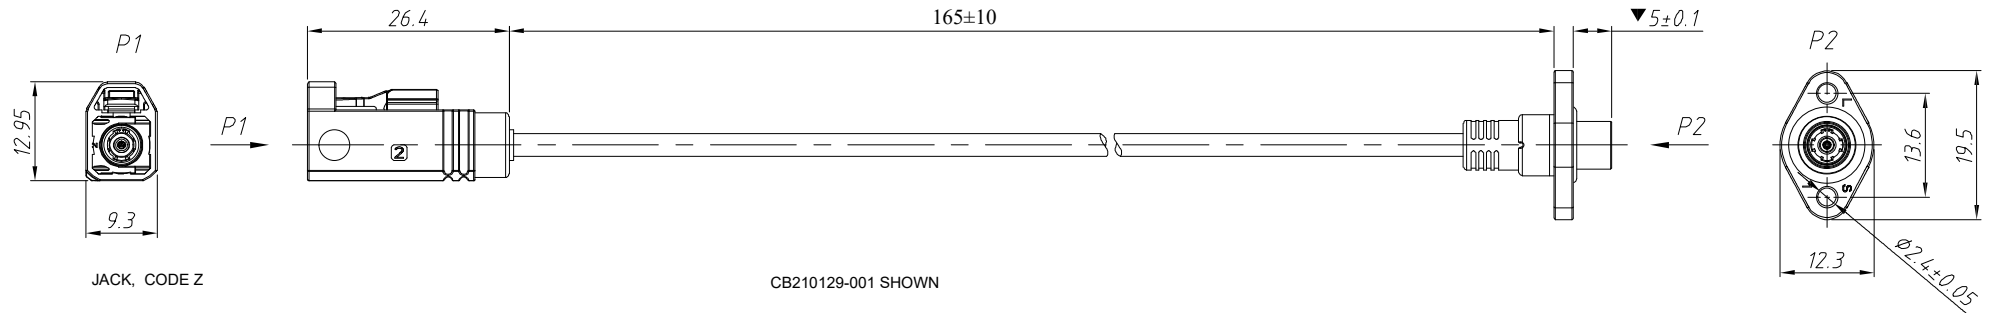

NOTES:

1. Impedance: 50Ohms Nominal.
2. Voltage withstanding: 800V
3. Working voltage: 60V dc max
4. Current rating: 1A dc max
5. Insulation withstanding: 100Mohms.
6. Frequency range: DC~3GHz
7. Working Temperature: -40°C~105°C.
9. Insertion/withdraw life: 500cycles min.

CONBEONE P/N	FAKRA CODE	P1	P2
CB210129-001	Z	FAKRA JACK	SMB STRAIGHT
CB210129-002	Z	FAKRA JACK	SMB R/A
CB210129-003	Z	FAKRA PLUG	SMB R/A



THE DRAWING IS A CONTROLLED DOCUMENT FOR
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING
CONTROLLING ORGANIZATION SHOULD BE
CONTACTED FOR LATEST REVISION

APPROVED RW	P/N: SEE TABLE	CONBEONE www.conbeone.com				
CHECKED CT	DOC# SD-CB210129	TITLE: RF CABLE SMB JACK TO FAKRA CABLE, L=160MM				
DRAWN MW	CUSTOMER P/N N/A	SIZE A4	UNIT MM	SCALE N.T.S	PAGE 1 OF 1	REV A

4

3


2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	250530




PLUG, CODE Z

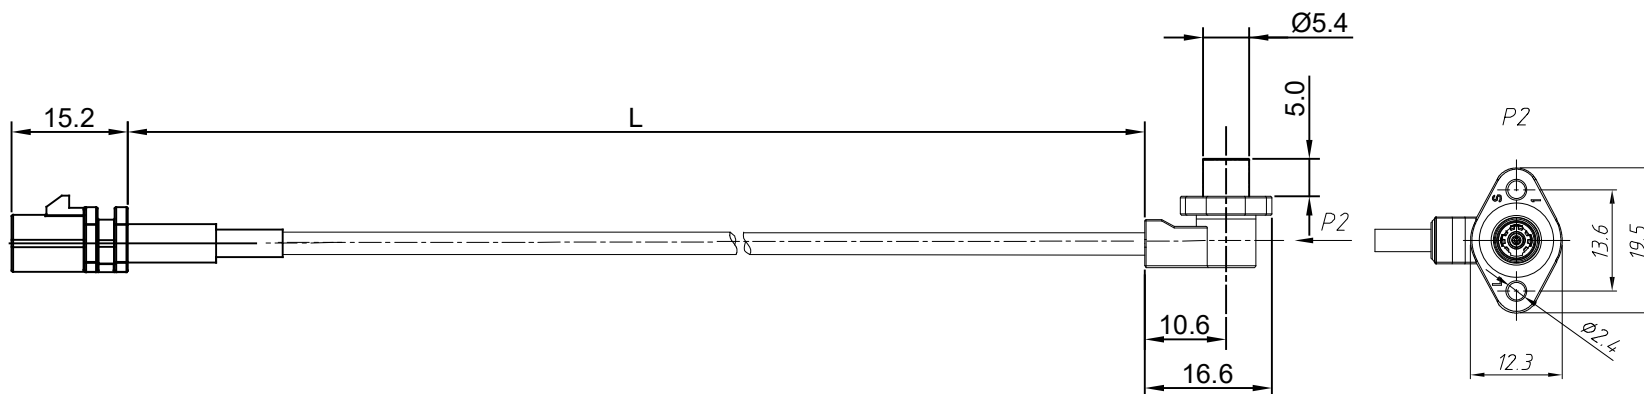P1

CONBEONE P/N	FAKRA CODE	L	TOLERANCE
CB210129-101	Z	165	±10
CB210129-102	Z	500	±10

NOTES:

1. Impedance: 50Ohms Nominal.
2. Voltage withstanding: 800V
3. Working voltage: 60V dc max
4. Current rating: 1A dc max
5. Insultation withstanding: 100Mohms.
6. Frequency range: DC~3GHz
7. Working Temperature: -40°C~105°C.
9. Insertion/withdraw life: 500cycles min.



THE DRAWING IS A CONTROLLED DOCUMENT FOR
DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS
SUBJECT TO CHANGE AND THE SEMPER ENGINEERING
CONTROLLING ORGANIZATION SHOULD BE
CONTACTED FOR LATEST REVISION

GENERAL TOLERANCE
UNLESS SPECIFIED:
0 PLC ±1.27
1 PLC ±0.50
2 PLC ±0.13
3 PLC ±0.03
4 PLC ±0.002
ANGLES ±3°

APPROVED	P/N:	CONBEONE				
RW	SEE TABLE	www.conbeone.com				
CHECKED	DOC#	TITLE: RF CABLE				
CT	SD-CB210129-1	SMB JACK TO METABL FAKRA CABLE				
DRAWN	CUSTOMER P/N	SIZE	UNIT	SCALE	PAGE	REV
MW	N/A	A4	MM	N.T.S	1 OF 1	A

4

3

2

1