


4

3


2

1


REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	221103
B	1. CHANGE FARAK 2. ADD LASER MARK	MW	240520
C	1. ADD LENGTH	MW	241133



JACK, CODE Z

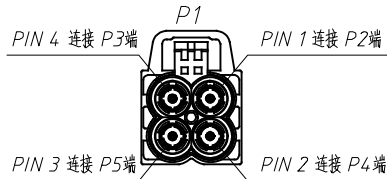


P2



LASER PRINT MARK DESCRIPTION:

LS CB210133-900 A20240514100110

SERIER CODE
YYYYMMDD
LINE A
CRIMPED CABLE P/N

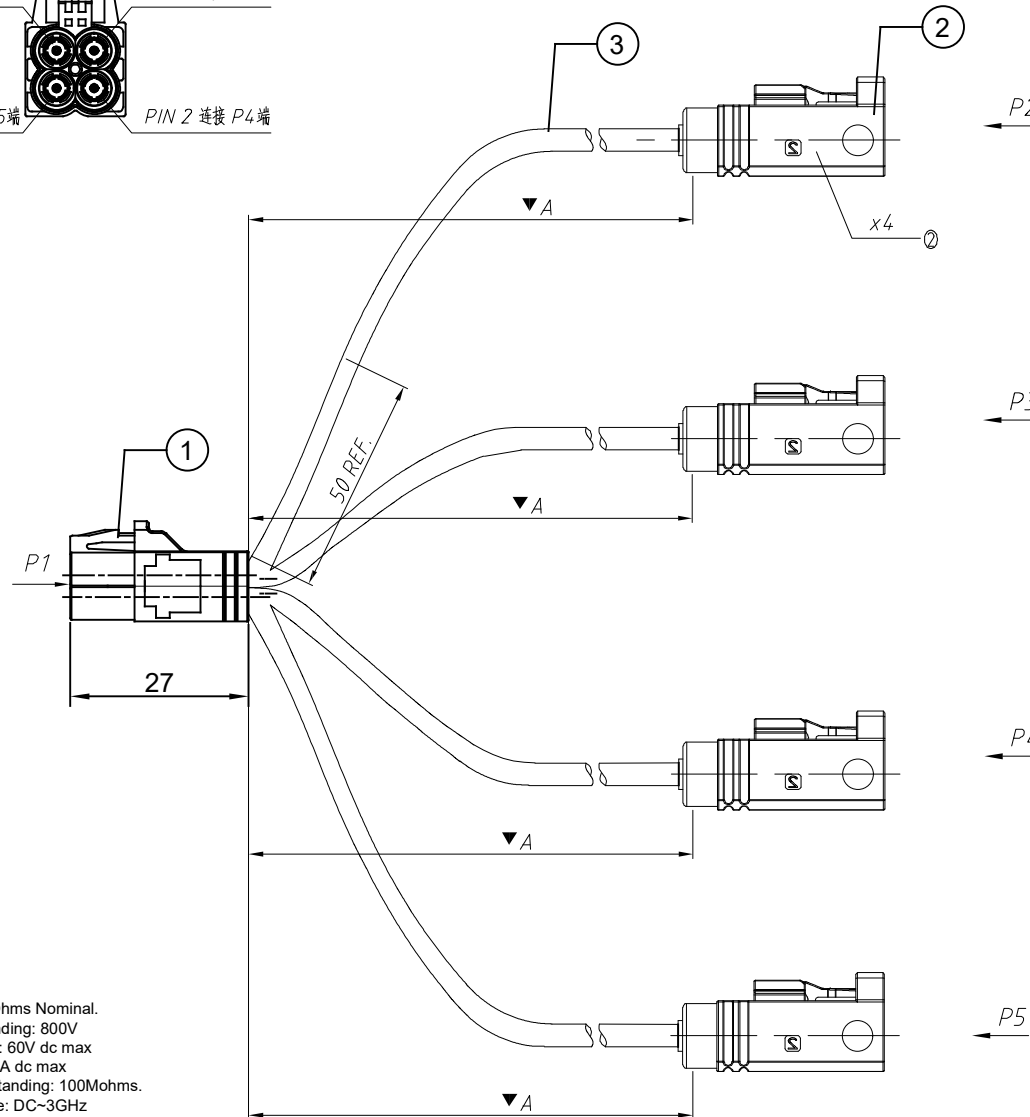

- NOTES:
1. Impedance: 50Ohms Nominal.
 2. Voltage withstanding: 800V
 3. Working voltage: 60V dc max
 4. Current rating: 1A dc max
 5. Insulation withstanding: 100Mohms.
 6. Frequency range: DC~3GHz
 7. Working Temperature: -40°C~105°C.
 9. Insertion/withdraw life: 25cycles min.

CONBEONE P/N	MINI FAKRA CODE	MINI FAKRA HSG COLOR	DIM A LENGTH MM
CB210133-00A	A	BLACK	500
CB210133-00B	B	WHITE	500
CB210133-00C	C	BLUE	500
CB210133-00D	D	PURPLE	500
CB210133-00E	E	GREEN	500
CB210133-00F	F	BROWN	500
CB210133-00Z	Z	WHITE BLUE	500
CB210133-20A	A	BLACK	2000
CB210133-20B	B	WHITE	2000
CB210133-20C	C	BLUE	2000
CB210133-20D	D	PURPLE	2000
CB210133-20E	E	GREEN	2000
CB210133-20F	F	BROWN	2000
CB210133-20Z	Z	WHITE BLUE	2000

3	2	M	RG174 COAXIAL CABLE						
2	4	PCS	FAKRA RECEPTACLE, Z CODE						
1	1	PCS	MINI FAKRA 4IN1 JACK, EQUIVALENT TO RESENBERGER HFM 4 PORTS						
S/N	QTY	UNIT	DESCRIPTION						
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com				
			RW	SEE TABLE					
			CHECKED	DOC#	TITLE: RF CABLE, HFM EQUIVALENT MINI FAKRA 4IN1 F TO FAKRA JACK				
			CT	SD-CB210133					
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.			DRAWN	CUSTOMER P/N	SIZE	UNIT	SCALE	PAGE	REV
			MW	N/A	A4	MM	N.T.S	1 OF 1	C

4

3

2

1