


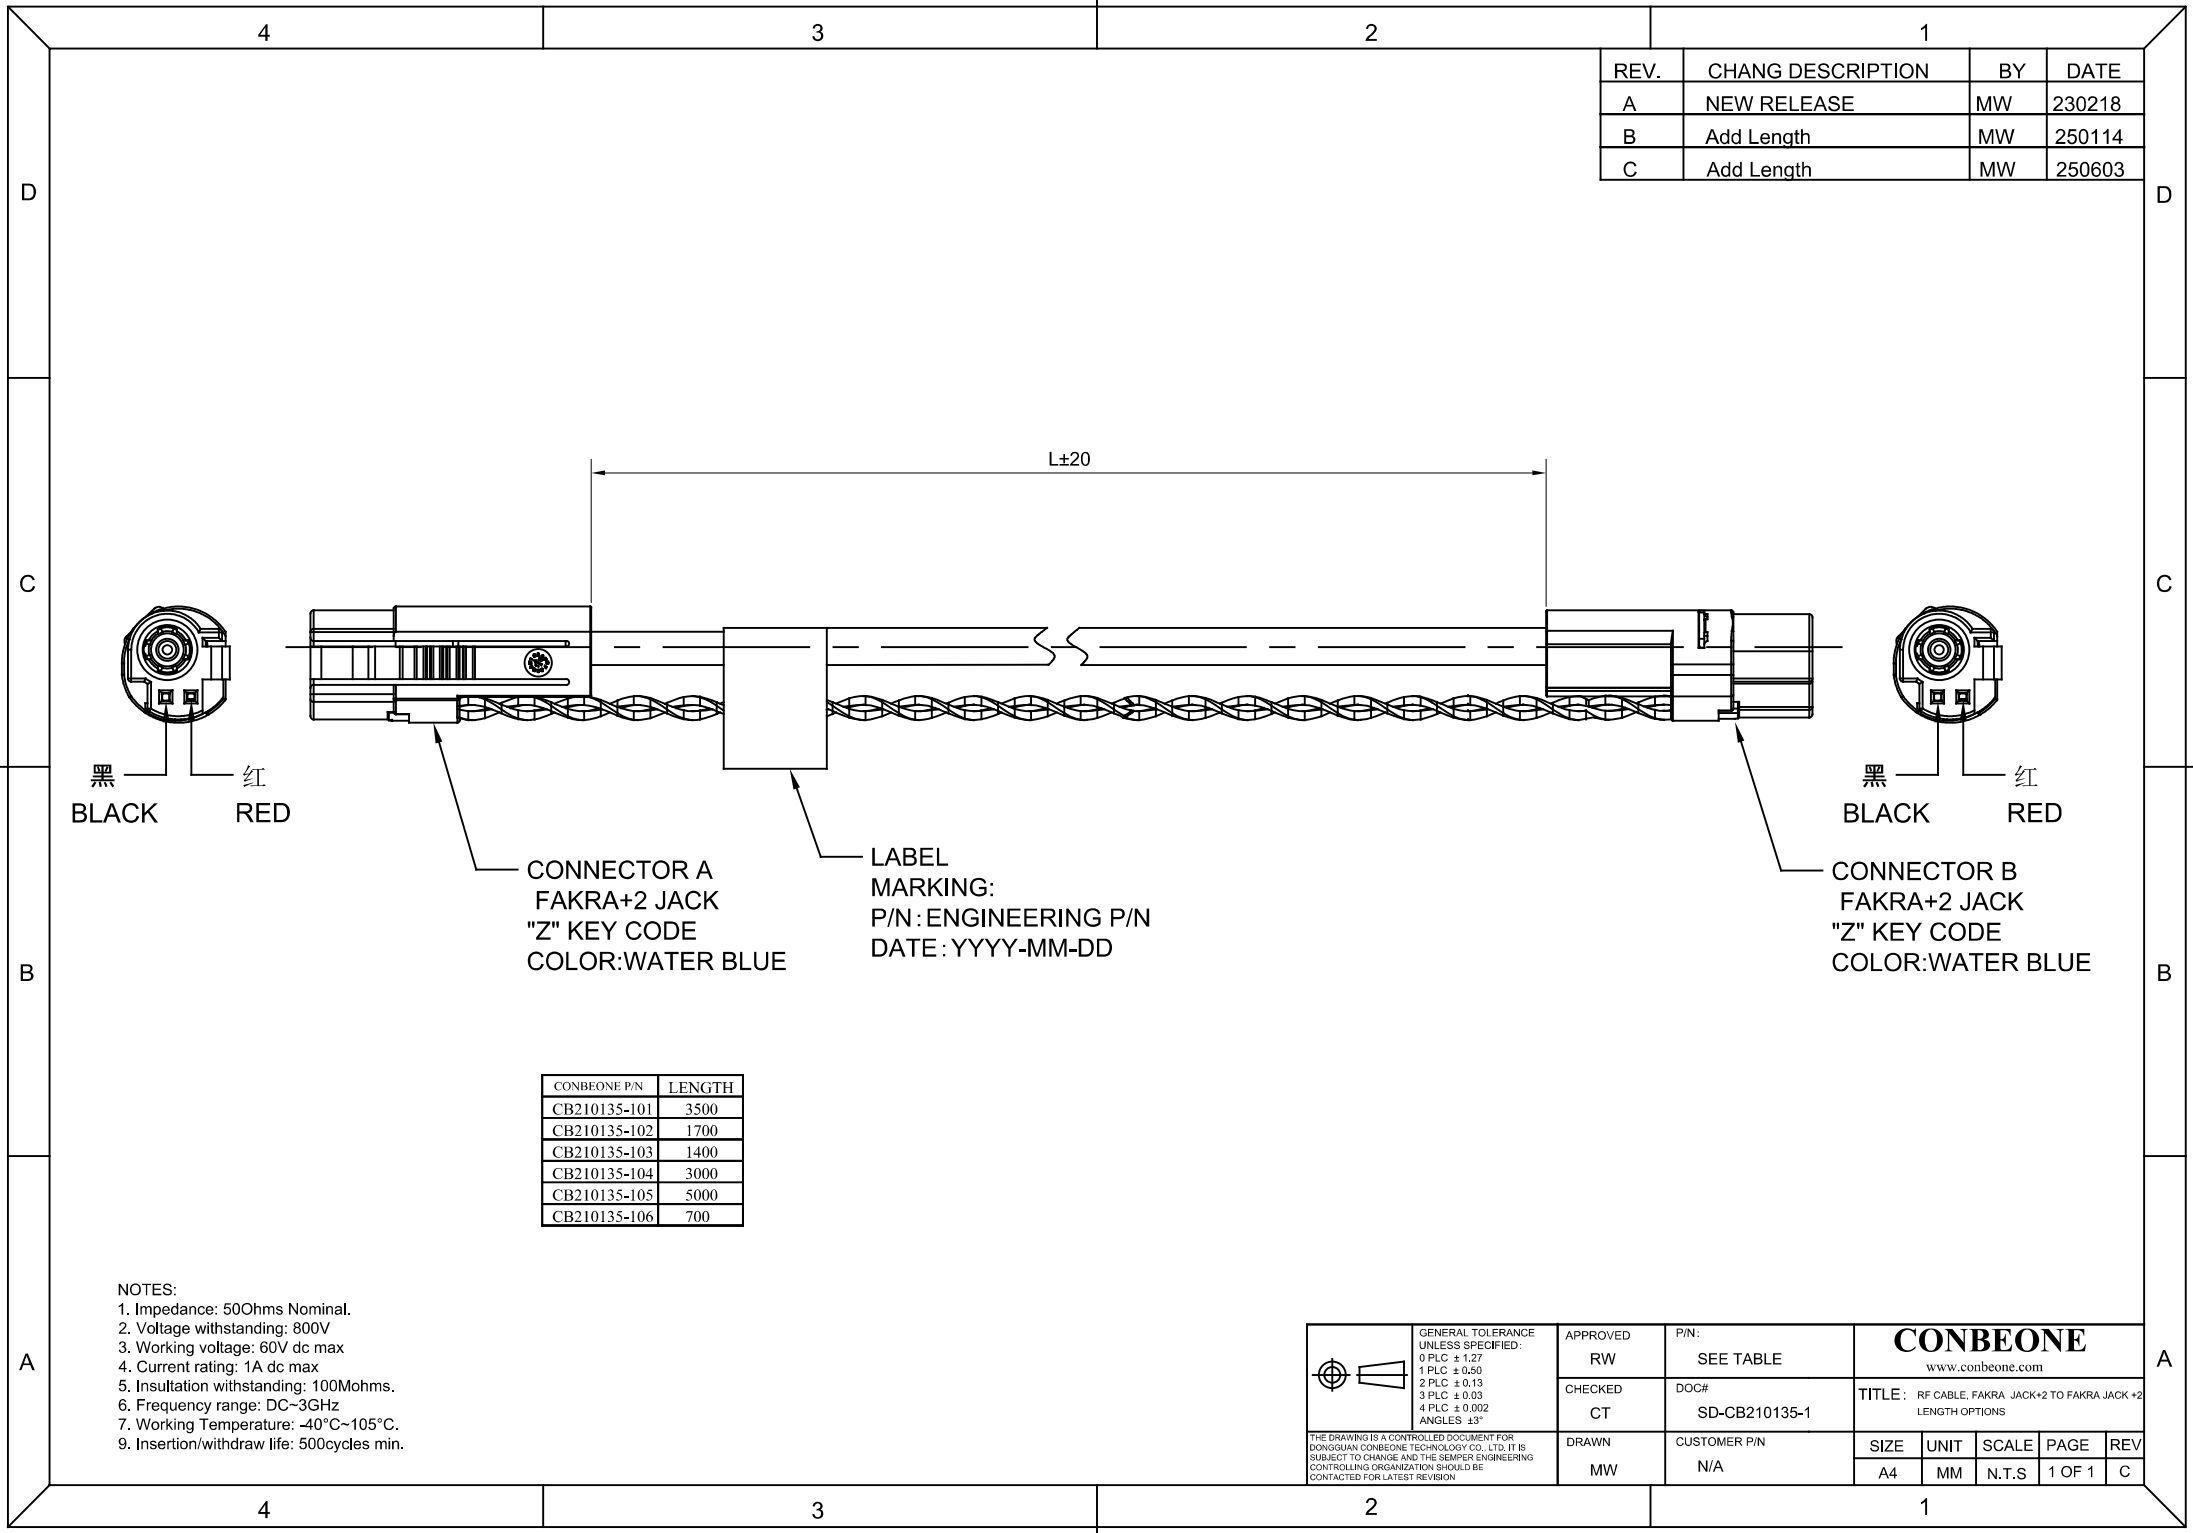

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	230218
B	Add Length	MW	250114
C	Add Length	MW	250603

CONBEONE P/N	LENGTH
CB210135-101	3500
CB210135-102	1700
CB210135-103	1400
CB210135-104	3000
CB210135-105	5000
CB210135-106	700

- NOTES:
1. Impedance: 50Ohms Nominal.
 2. Voltage withstanding: 800V
 3. Working voltage: 60V dc max
 4. Current rating: 1A dc max
 5. Insultation withstanding: 100Mohms.
 6. Frequency range: DC~3GHz
 7. Working Temperature: -40°C~105°C.
 9. Insertion/withdraw life: 500cycles min.

	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ± 1.27 1 PLC ± 0.50 2 PLC ± 0.13 3 PLC ± 0.03 4 PLC ± 0.002 ANGLES ± 3°	APPROVED	P/N:	CONBEONE www.conbeone.com				
		RW	SEE TABLE					
		CHECKED	DOC#	TITLE: RF CABLE, FAKRA JACK+2 TO FAKRA JACK +2 LENGTH OPTIONS				
		CT	SD-CB210135-1					
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION.		DRAWN	CUSTOMER P/N	SIZE	UNIT	SCALE	PAGE	REV
		MW	N/A	A4	MM	N.T.S	1 OF 1	C