


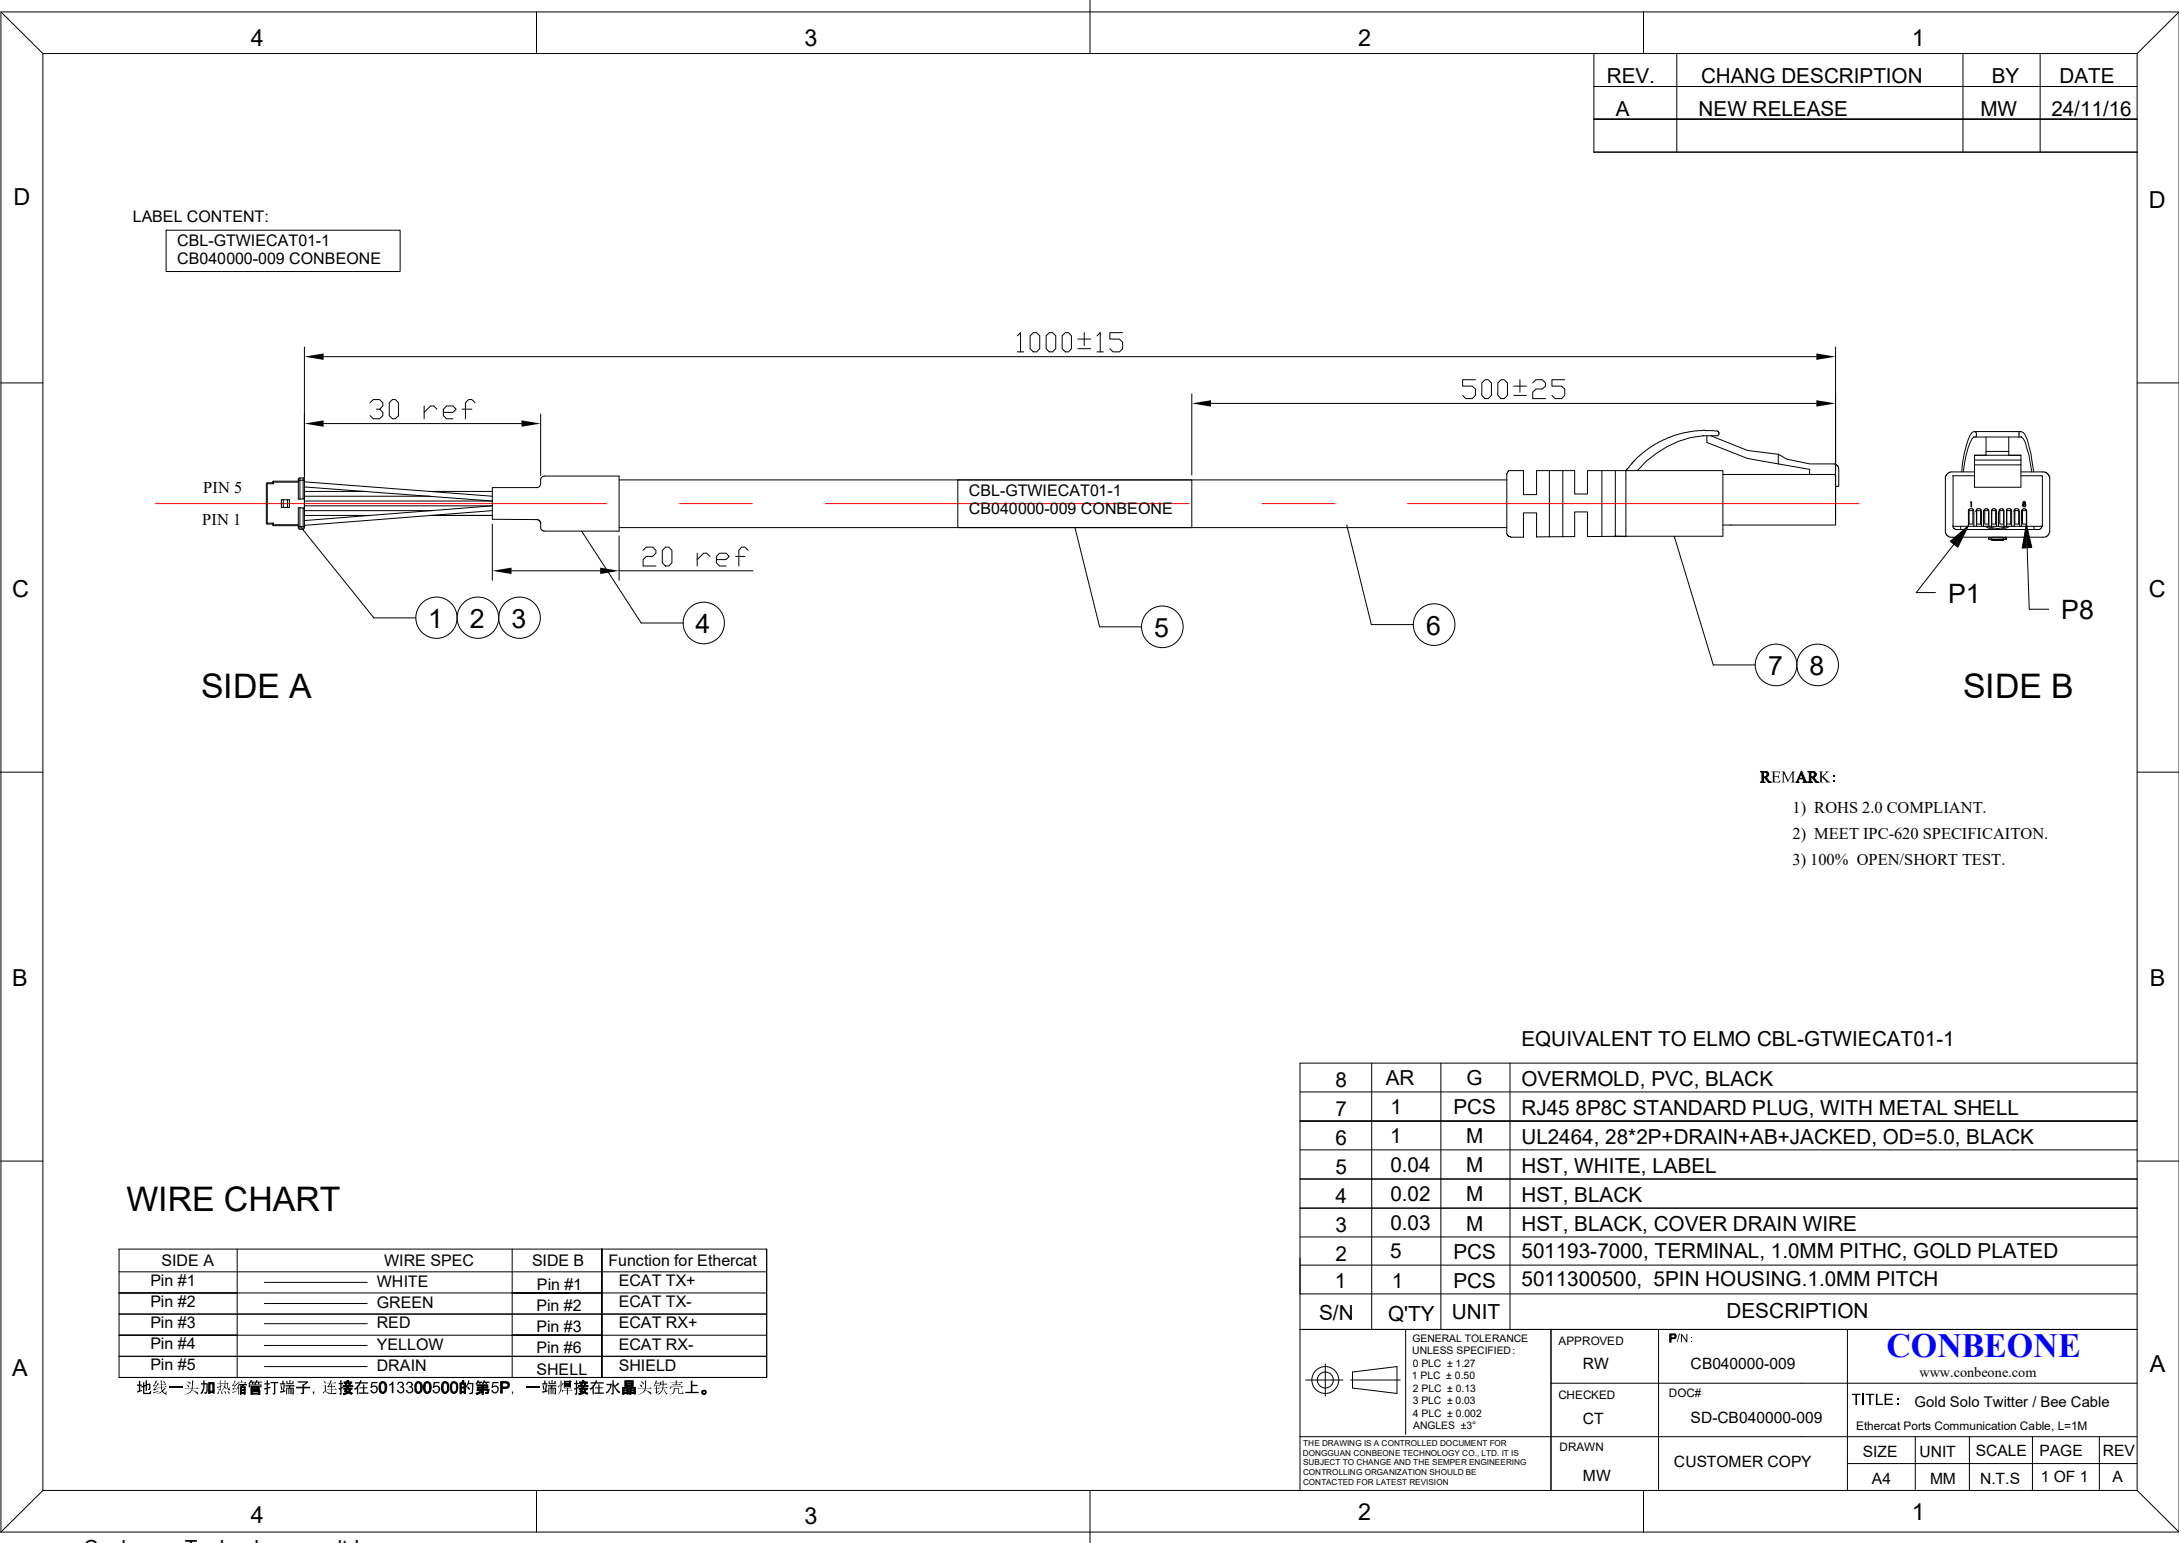

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	24/11/16

LABEL CONTENT:

CBL-GTWIECAT01-1
CB040000-009 CONBEONE

SIDE A

SIDE B

REMARK:

- 1) ROHS 2.0 COMPLIANT.
- 2) MEET IPC-620 SPECIFICATION.
- 3) 100% OPEN/SHORT TEST.

EQUIVALENT TO ELMO CBL-GTWIECAT01-1

8	AR	G	OVERMOLD, PVC, BLACK			
7	1	PCS	RJ45 8P8C STANDARD PLUG, WITH METAL SHELL			
6	1	M	UL2464, 28*2P+DRAIN+AB+JACKED, OD=5.0, BLACK			
5	0.04	M	HST, WHITE, LABEL			
4	0.02	M	HST, BLACK			
3	0.03	M	HST, BLACK, COVER DRAIN WIRE			
2	5	PCS	501193-7000, TERMINAL, 1.0MM PTHC, GOLD PLATED			
1	1	PCS	5011300500, 5PIN HOUSING.1.0MM PITCH			
S/N	Q'TY	UNIT	DESCRIPTION			
 GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3° THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION		APPROVED	PIN:	CONBEONE www.conbeone.com		
		RW	CB040000-009			
		CHECKED	DOC#	TITLE: Gold Solo Twitter / Bee Cable Ethernet Ports Communication Cable, L=1M		
		CT	SD-CB040000-009			
THE DRAWING IS A CONTROLLED DOCUMENT FOR DONGGUAN CONBEONE TECHNOLOGY CO., LTD. IT IS SUBJECT TO CHANGE AND THE SEMPER ENGINEERING CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR LATEST REVISION		DRAWN	CUSTOMER COPY			
		MW				
		SIZE	UNIT	SCALE	PAGE	REV
		A4	MM	N.T.S	1 OF 1	A

WIRE CHART

SIDE A	WIRE SPEC	SIDE B	Function for Ethercat
Pin #1	WHITE	Pin #1	ECAT TX+
Pin #2	GREEN	Pin #2	ECAT TX-
Pin #3	RED	Pin #3	ECAT RX+
Pin #4	YELLOW	Pin #6	ECAT RX-
Pin #5	DRAIN	SHELL	SHIELD

地线一头加热缩管打端子，连接在5013300500的第5P，一端焊接在水晶头铁壳上。