



4

3

2

1

REV.	CHANG DESCRIPTION	BY	DATE
A	NEW RELEASE	MW	221103
B	1. CHANGE FARAK 2. ADD LASER MARK	MW	240520
C	1. ADD LENGTH	MW	241131

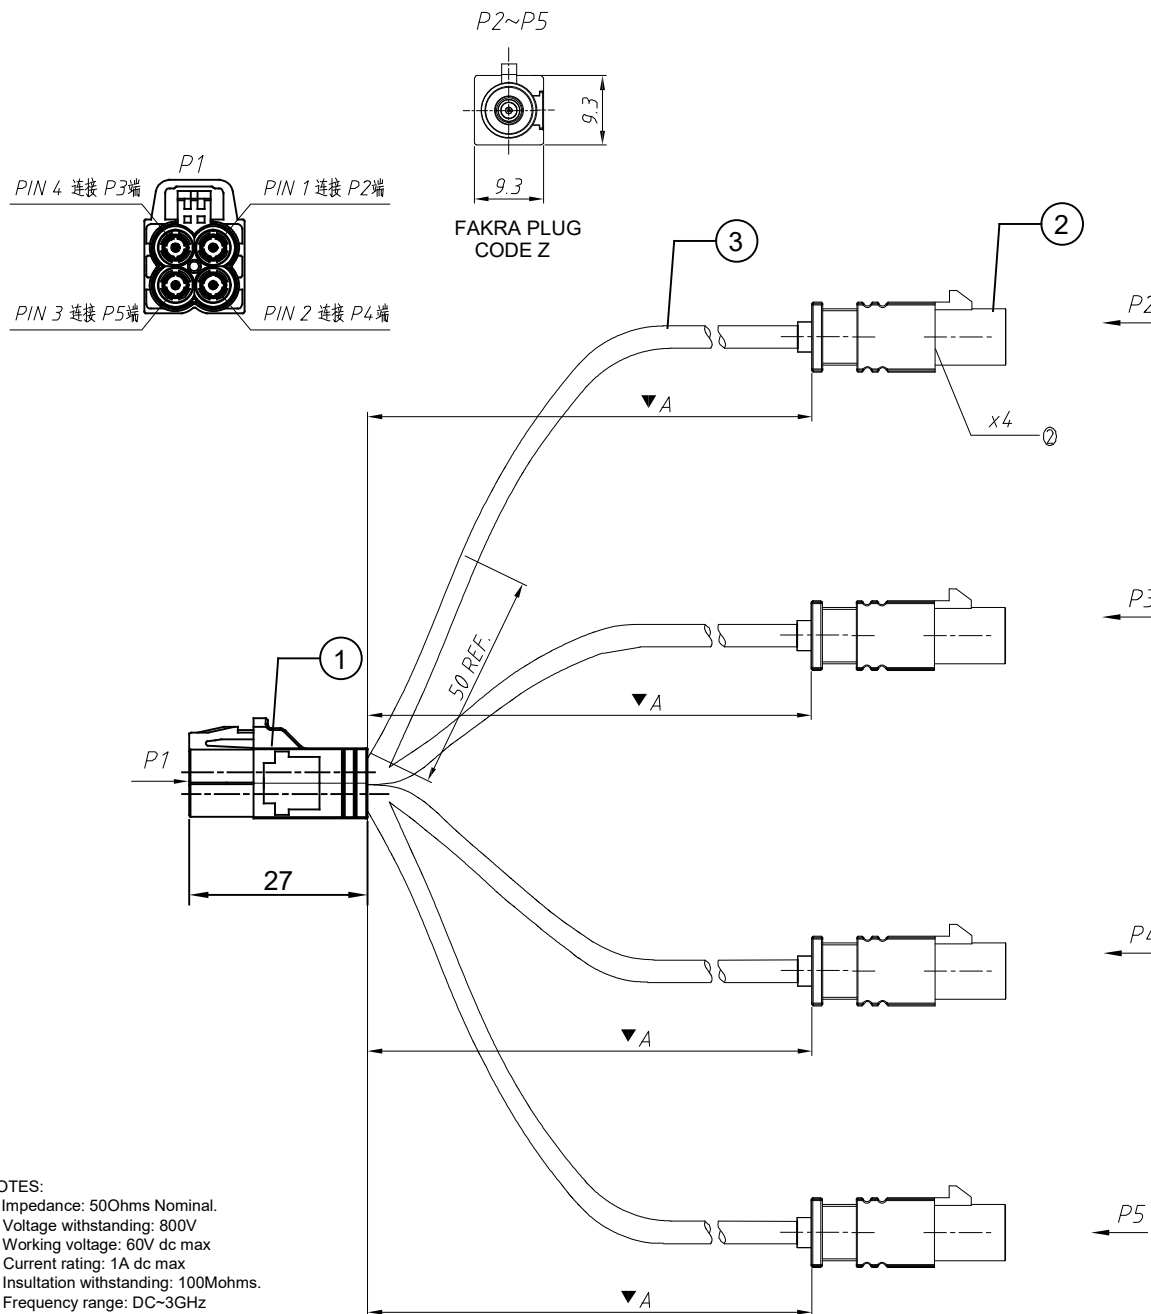

LASER PRINT MARK DESCRIPTION:

LS CB210131-900 A20240514100110
SERIER CODE
YYYYMMDD
LINE A
CRIMPED CABLE P/N

CONBEONE P/N	MINI FAKRA CODE	MINI FAKRA HSG COLOR	DIM A LENGTH MM
CB210131-00A	A	BLACK	500
CB210131-00B	B	WHITE	500
CB210131-00C	C	BLUE	500
CB210131-00D	D	PURPLE	500
CB210131-00E	E	GREEN	500
CB210131-00F	F	BROWN	500
CB210131-00Z	Z	WHITE BLUE	500
CB210131-20A	A	BLACK	2000
CB210131-20B	B	WHITE	2000
CB210131-20C	C	BLUE	2000
CB210131-20D	D	PURPLE	2000
CB210131-20E	E	GREEN	2000
CB210131-20F	F	BROWN	2000
CB210131-20Z	Z	WHITE BLUE	2000

- NOTES:
1. Impedance: 50Ohms Nominal.
 2. Voltage withstanding: 800V
 3. Working voltage: 60V dc max
 4. Current rating: 1A dc max
 5. Insulation withstanding: 100Mohms.
 6. Frequency range: DC~3GHz
 7. Working Temperature: -40°C~105°C.
 9. Insertion/withdraw life: 25cycles min.

3	2	M	RG174 COAXIAL CABLE						
2	4	PCS	FAKRA PLUG, Z CODE						
1	1	PCS	MINI FAKRA 4IN1 JACK, EQUIVALENT TO RESENBERGER HFM 4 PORTS						
S/N	Q'TY	UNIT	DESCRIPTION						
	GENERAL TOLERANCE UNLESS SPECIFIED: 0 PLC ±1.27 1 PLC ±0.50 2 PLC ±0.13 3 PLC ±0.03 4 PLC ±0.002 ANGLES ±3°		APPROVED	PIN:	CONBEONE www.conbeone.com				
	RW		SEE TABLE						
	CHECKED		DOCF						
	CT		SD-CB210131	TITLE: RF CABLE. HFM EQUIVALENT MINI FAKRA 4IN1 F TO FAKRA PLUG					
	DRAWN		CUSTOMER P/N	SIZE		UNIT	SCALE	PAGE	REV
	MW		N/A	A4		MM	N.T.S	1 OF 1	C

CONBEONE
www.conbeone.com

TITLE: RF CABLE, HFM EQUIVALENT
MINI FAKRA 4IN1 F TO FAKRA PLUG

4

3

2

1